

Engineering Fluid Mechanics Solution Manual

Prof. T.T. Al-Shemmeri



Solution Manual

Download free books at

bookboon.com

Prof. T.T. Al-Shemmeri

Engineering Fluid Mechanics Solution Manual



Engineering Fluid Mechanics Solution Manual

© 2012 Prof. T.T. Al-Shemmeri & bookboon.com (Ventus Publishing ApS)

ISBN 978-87-403-0263-9

Contents

	Book Description:	5
	Author Details:	5
1	Chapter One Tutorial Problems	6
2	Chapter Two Tutorial Problems	13
3	Chapter Three Tutorial Problems	21
4	Chapter Four Tutorial Problems	28
5	Chapter Five Tutorial Problems	31
	Sample Examination Paper	33
	Class Test – Fluid Mechanics	34
	Formulae Sheet	44

Teach with the Best. Learn with the Best.

Agilent offers a wide variety of affordable, industry-leading electronic test equipment as well as knowledge-rich, on-line resources—for professors and students.

We have 100's of comprehensive web-based teaching tools, lab experiments, application notes, brochures, DVDs/CDs, posters, and more.



See what Agilent can do for you.
www.agilent.com/find/EDUstudents
www.agilent.com/find/EDUeducators

© Agilent Technologies, Inc. 2012

u.s. 1-800-829-4444 canada: 1-877-894-4414

Anticipate — Accelerate — Achieve



Agilent Technologies



Book Description:

Title – Engineering Fluid Mechanics Solution Manual

Author – Prof. T.T. Al-Shemmeri

Fluid Mechanics is an essential subject in the study of the behaviour of fluids at rest and when in motion.

The book is complimentary follow up for the book “Engineering Fluid Mechanics” also published on BOOKBOON, presenting the solutions to tutorial problems, to help students the option to see if they got the correct answers, and if not, where they went wrong, and change it to get the correct answers.

Author Details:

Prof Tarik Al-Shemmeri – BSc, MSc, PhD, CEng

Professor of Renewable Energy Technology at Staffordshire University.

Current research interests in Renewable Energy and Environmental Technology.

Lecturing topics include: Energy management and Power generation.



1 Chapter One Tutorial Problems

1.1 Show that the kinematic viscosity has the primary dimensions of L^2T^{-1} .

Solution:

The kinematic viscosity is defined as the ratio of the dynamic viscosity by the density of the fluid.

The density has units of mass (kg) divided by volume (m^3); whereas the dynamic viscosity has the units of mass (kg) per meter (m) per time (s).


Hence:

$$\nu = \frac{\mu}{\rho} = \frac{ML^{-1}T^{-1}}{ML^{-3}} = L^2T^{-1}$$

1.2 In a fluid the velocity measured at a distance of 75mm from the boundary is 1.125m/s. The fluid has absolute viscosity 0.048 Pa s and relative density 0.913. What is the velocity gradient and shear stress at the boundary assuming a linear velocity distribution? Determine its kinematic viscosity.

[Ans: 15 s^{-1} , 0.72Pa.s ; $5.257 \times 10^{-5}\text{ m}^2/\text{s}$]

Solution:

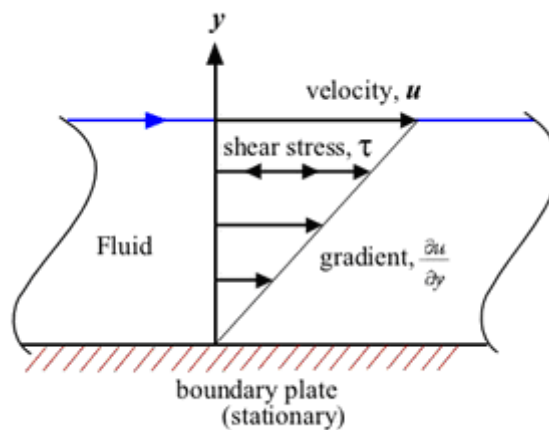


$$\text{Gradient} = \frac{dV}{dy} = \frac{1.125}{0.075} = 15 \text{ s}^{-1}$$

$$\tau = \mu \frac{dV}{dy} = 0.048 \times 15 = 0.720 \text{ Pa.s}$$

$$\nu = \frac{\mu}{\rho} = \frac{0.048}{913} = 5.257 \times 10^{-5} \text{ m}^2 / \text{s}$$

- 1.3** A dead-weight tester is used to calibrate a pressure transducer by the use of known weights placed on a piston hence pressurizing the hydraulic oil contained. If the diameter of the piston is 10 mm, determine the required weight to create a pressure of 2 bars.

[Ans: 1.6 kg]

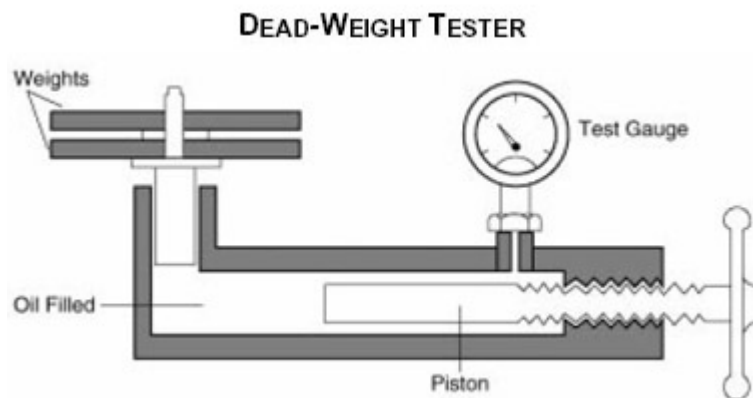

Solution:


(a) $P = F/A$

$$A = \frac{\pi}{4} D^2 = \frac{\pi}{4} \times 0.010^2 = 7.854 \times 10^{-5} \text{ m}^2$$

$$\begin{aligned} \text{Hence the weight} &= P \times A / g \\ &= 2 \times 10^5 \times 7.854 \times 10^{-5} / 9.81 \\ &= 1.60 \text{ kg} \end{aligned}$$

- 1.4 How deep can a diver descend in ocean water without damaging his watch, which will withstand an absolute pressure of 5.5 bar?

Take the density of ocean water, $\rho = 1025 \text{ kg/m}^3$.

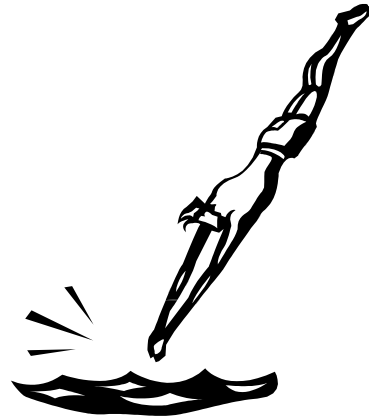

[Ans: 44.75 m]

Solution:


Use the static equation: $p = \rho g h$

Hence the depth can be calculated as:

$$h = \frac{P}{\rho \cdot g} = \frac{(5.5 - 1) \times 10^5}{1025 \times 9.81} = 44.75 \text{ m Water}$$

- 1.5 The U-tube manometer shown below, prove that the difference in pressure is given by:

$$P_1 - P_2 = \rho \cdot g \cdot z_2 \left[1 + \left(\frac{d}{D} \right)^2 \right]$$

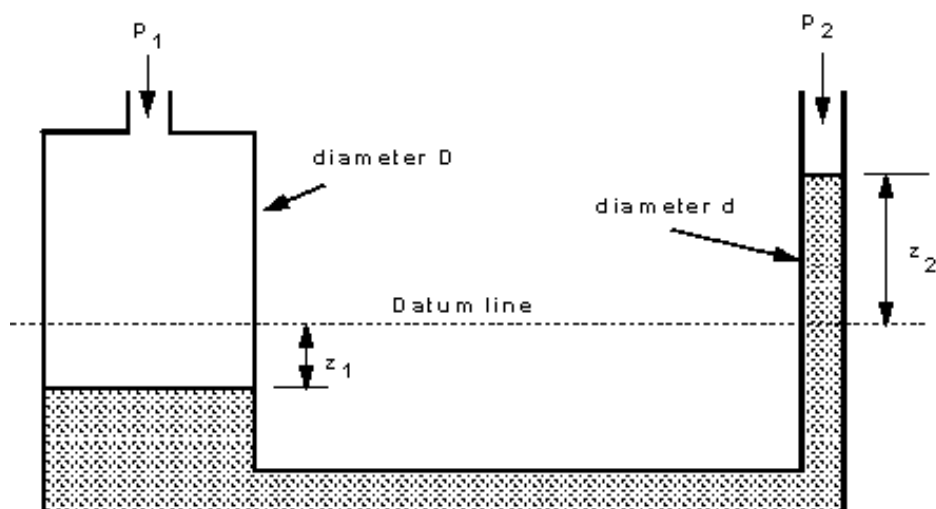

Solution:

The relationship between liquid columns and the area of cross section is based on the conservation of matter, ie continuity equation, hence:

$$\text{volume 1} = \text{volume 2}$$

$$z_1 x A_1 = z_2 x A_2$$

$$\text{hence} \rightarrow z_1 = \frac{z_2 x (\pi/4) x d^2}{(\pi/4) x D^2} = z_2 x \left(\frac{d}{D}\right)^2$$

For the “U” tube manometer that the height different in the two columns gives the pressure difference, therefore:

$$F_1 = F_2$$

$$P_1 + \rho \cdot g \cdot z_1 = P_2 + \rho \cdot g \cdot z_2$$

hence

$$P_1 - P_2 = \rho \cdot g \cdot (z_2 - z_1)$$


$$= \rho \cdot g \cdot z_2 x [1 + (d/D)^2]$$

Clearly if D is very much larger than d then $(d/D)^2$ is very small so

$$P_1 - P_2 = \rho \cdot g \cdot z_2$$

- 1.6** A flat circular plate, 1.25 m diameter is immersed in sewage water (density 1200 kg/m³) such that its greatest and least depths are 1.50 m and 0.60 m respectively. Determine the force exerted on one face by the water pressure,

[Ans: 15180 N]

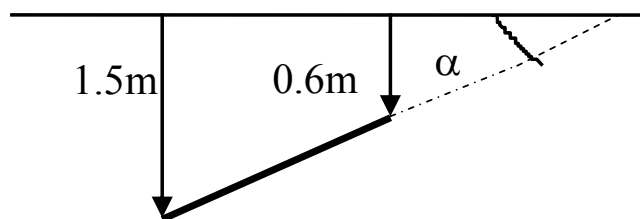

Solution:

Area of lamina

$$A = \frac{1}{4} \pi (1.25)^2 = 1.228 \text{ m}^2$$

Depth to centroid

$$h_c = \frac{1}{2} (0.60 + 1.50) = 1.05 \text{ m}$$

Resultant Force

$$\begin{aligned} F &= \rho g A h_c = 9.81 \times 1200 \times 1.228 \times 1.05 \\ &= 15180 \text{ N} \end{aligned}$$



Find and follow us: <http://twitter.com/bioradlscareers>
www.linkedin.com/groupsDirectory, search for Bio-Rad Life Sciences Careers
<http://bio-radlifesciencescareersblog.blogspot.com>





Your Profession is Your Passion. Pass it On.

John Randall, PhD
Senior Marketing Manager, Bio-Plex Business Unit

Bio-Rad is a longtime leader in the life science research industry and has been voted one of the Best Places to Work by our employees in the San Francisco Bay Area. Bring out your best in one of our many positions in research and development, sales, marketing, operations, and software development. Opportunities await — share your passion at Bio-Rad!

www.bio-rad.com/careers






- 1.7 A rectangular block of wood, floats with one face horizontal in a fluid (RD = 0.9). The wood's density is 750 kg/m^3 . Determine the percentage of the wood, which is not submerged.

[Ans: 17%]

Solution:

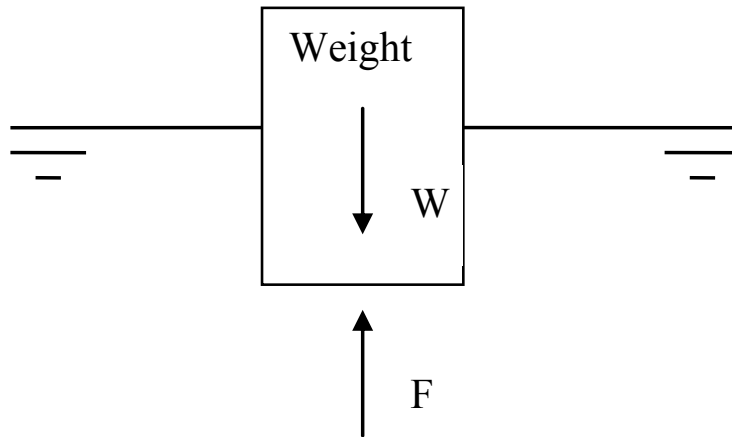

For stable condition

Upthrust = weight force or

$$F = W$$

$$\text{The Upthrust due to Buoyancy} = \rho_{\text{seawater}} g V_x$$

$$\text{The total weight of submersed wood} = \rho_{\text{wood}} g V_L$$


Therefore the portion of block that is NOT submerged is

$$1 - V_x/V_L = (\rho_{\text{wood}} / \rho_{\text{water}}) = 1 - 750 / 900 = 17\%$$

- 1.8** An empty balloon and its equipment weight 50 kg, is inflated to a diameter of 6m, with a gas of density 0.6 kg/m³. What is the maximum weight of cargo that can be lifted on this balloon, if air density is assumed constant at 1.2 kg/m³?

[Ans: 17.86 kg]

Solution:



Since the system is stable according to Newton's second law of motion:

$$\text{Upthrust} = \text{Weight force} + \text{Payload}$$

$$\text{The Upthrust is } F = \rho \times g \times V_L = 1.2 \times 9.81 \times (\pi \times (4/3) \times 3^3) = 1331.4 \text{ N}$$

$$\text{Weight of balloon gas} = \rho \times V_L = 0.6 \times 9.81 \times (\pi \times (4/3) \times 3^3) = 666 \text{ N}$$

$$\text{Weight of equipment} = 50 \text{ kg} = 50 \times 9.81 = 490.5 \text{ N}$$

Therefore the payload that can be lifted


$$\begin{aligned} P &= F - W \\ &= 1331.4 - (666 + 490.5) \\ &= 175 \text{ N} = 17.9 \text{ kg.} \end{aligned}$$

2 Chapter Two Tutorial Problems

- 2.1 A 20 mm diameter pipe forks, one branch being 10 mm in diameter and the other 15 mm in diameter. If the velocity in the 10 mm pipe is 0.3 m/s and that in the 15 mm pipe is 0.6 m/s, calculate the rate of flow in cm^3/s and velocity in m/s in the 20 mm diameter pipe.

(129.6 cm^3/s , 0.413 m/s)

Solution:

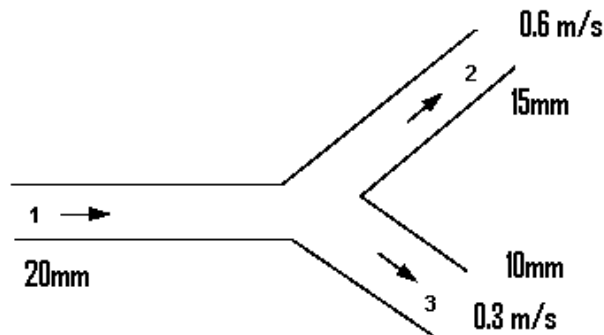

Total mass flow into the junction = Total mass flow out of the junction

$$\rho_1 Q_1 = \rho_2 Q_2 + \rho_3 Q_3$$

When the flow is incompressible (e.g. if it is water) $\rho_1 = \rho_2 = \rho$

$$\begin{aligned} Q &= A_2 V_2 + A_3 V_3 \\ &= (\pi/4) D_2^2 V_2 + (\pi/4) D_3^2 V_3 \\ &= (\pi/4) 0.01^2 \times 0.3 + (\pi/4) 0.015^2 \times 0.6 \\ &= 2.356 \times 10^{-5} + 10.6 \times 10^{-5} \\ &= 12.96 \times 10^{-5} \text{ m}^3/\text{s} \end{aligned}$$

since

$$Q = A_1 \times V_1$$

$$\therefore V_1 = \frac{Q}{\frac{\pi}{4} \times 0.02^2} = 0.4125 \text{ m/s}$$

- 2.2 Water at 36 m above sea level has a velocity of 18 m/s and a pressure of 350 kN/m². Determine the potential, kinetic and pressure energy of the water in metres of head. Also determine the total head.

Ans (35.68 m, 16.5 m, 36 m, 88.2 m)

Solution:

Take each term separately

$$\frac{p_1}{\rho g} = \frac{350 \times 10^3}{1000 \times 9.81} = 35.678 \text{ m}$$

$$\frac{V_1^2}{2g} = \frac{18^2}{2 \times 9.81} = 16.514 \text{ m}$$

$$z_1 = 36 \text{ m}$$

The total head = 35.678 + 16.514 + 36 = 88.192 m



ericsson.
com

Shaping tomorrow's world – today

Our business is at the heart of a connected world – a world where communication is empowering people, business and society. Our networks, telecom services and multimedia solutions are shaping tomorrow. And this might just be your chance to shape your own future.

It's a people thing

We are looking for high-caliber people who can see the opportunities, people who can bring knowledge, energy and vision to our organization. In return we offer the chance to work with cutting-edge technology, personal and professional development, and the opportunity to make a difference in a truly global company.

We are currently recruiting both new graduates and experienced professionals in four areas: **Software, Hardware, Systems and Integration & Verification.**


Are you ready to shape your future? Begin by exploring a career with Ericsson. Visit www.ericsson.com/join-ericsson



- 2.3 The air supply to an engine on a test bed passes down a 180 mm diameter pipe fitted with an orifice plate 90 mm diameter. The pressure drop across the orifice is 80 mm of paraffin. The coefficient of discharge of the orifice is 0.62 and the densities of air and paraffin are 1.2 kg/m^3 and 830 kg/m^3 respectively. Calculate the mass flow rate of air to the engine.

Ans (0.16 kg/s)

Solution:

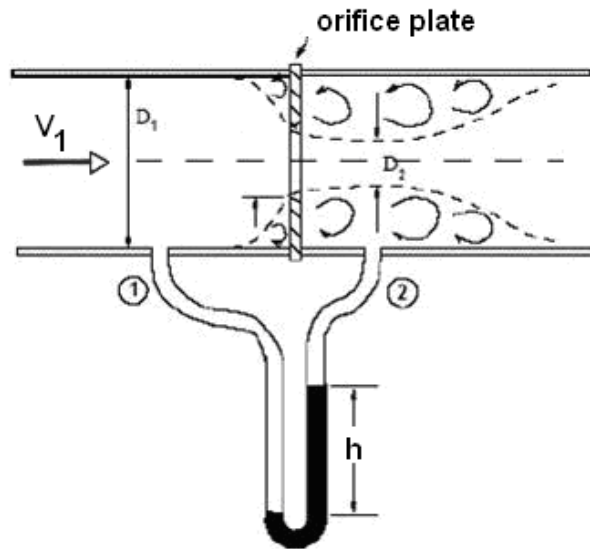

$$(i) \quad p_1 - p_2 = \rho_m \times g \times h$$

$$= 830 \times 9.81 \times 0.080 = 651 \text{ Pa}$$

$$(ii) \quad v_2 = \sqrt{\frac{2(p_1 - p_2)}{\rho[1 - (A_2/A_1)^2]}} = \sqrt{\frac{2 \times 651.4}{1.2[1 - (90/180)^4]}} = 34.03 \text{ m/s}$$

$$(iii) \quad m = C_d V_2 A_2 \times \rho$$

$$A_2 = \frac{\pi}{4} \times 0.09^2 = 6.36 \times 10^{-3} \text{ m}^2$$

$$Q = 0.62 \times 34.03 \times 0.00636 \times 1.2$$

$$= 0.161 \text{ kg/s}$$

2.4 Determine the pressure loss in a 100 m long, 10 mm diameter smooth pipe if the flow velocity is 1 m/s for:

- a) air whose density 1.0 kg/m^3 and dynamic viscosity $1 \times 10^{-5} \text{ Ns/m}^2$.
- b) water whose density 1000 kg/m^3 and dynamic viscosity $1 \times 10^{-3} \text{ Ns/m}^2$.

Ans: (320 N/m^2 , 158 kN/m^2)

Solution:

a) For air

$$\text{Re} = \rho V D / \mu = 1 \times 1 \times 0.01 / 1 \times 10^{-5} = 1000 \text{ i.e. laminar}$$

$$f = 16/\text{Re} = 16/(1000) = 0.016$$

$$\text{therefore } h_f = 4fx \frac{L}{D} \frac{v^2}{2g}$$

$$h_f = 4 \times 0.016 \times \frac{100}{0.01} \times \frac{1^2}{19.62} = 32.6 \text{ m}$$

$$P = \rho \cdot g \cdot h_f = 1.0 \times 9.81 \times 32.6 = 320 \text{ N/m}^2$$

b) for water

$$\text{Re} = \rho V D / \mu$$

$$= 1000 \times 1 \times 0.01 / 1 \times 10^{-3} = 10^4 \text{ i.e. turbulent flow}$$

$$f = 0.079/\text{Re}^{0.25}$$

$$= 0.079/(10^4)^{0.25} = 0.0079$$

$$\text{therefore } h_f = 4fx \frac{L}{D} \frac{v^2}{2g}$$

$$h_f = 4 \times 0.0079 \times \frac{100}{0.01} \times \frac{1^2}{19.62} = 16.1 \text{ m}$$

$$P = \rho \cdot g \cdot h_f = 1000 \times 9.81 \times 16.1 = 157941 = 158 \text{ kN/m}^2$$

- 2.5 Determine the input power to an electric motor ($\eta_m = 90\%$) supplying a pump ($\eta_p = 90\%$) delivering 50 l/s of water ($\rho = 1000 \text{ kg/m}^3$, $\mu = 0.001 \text{ kg/ms}$) between two tanks with a difference in elevation of 50m if the pipeline length is 100m long in total of 150 mm diameter, assume a friction factor of 0.008 and neglect minor losses.

Ans: (33.6 kW)

Solution:

$$V = Q/A = 0.05/(\pi \times 0.15^2/4) = 2.83 \text{ m/s}$$

$$Re = \rho V D / \mu = 1000 \times 2.83 \times 0.15 / 0.001 = 4.244 \times 10^5$$

$$k/D = 0.15/150 = 0.001; \quad \text{From Moody diagram } f = 0.0051$$

$$h_f = \frac{4 f L V^2}{D 2g} = \frac{4 \times 0.008 \times 100}{0.15} \times \frac{2.83^2}{2 \times 9.81} = 8.708 \text{ m}$$

$$h_{\text{sys}} = H_f + H_z + H_o = 8.708 + 50 + 0 = 58.808 \text{ m}$$

$$\text{Input power } P = \frac{\rho \cdot g \cdot Q \cdot H_{\text{sys}}}{\eta_m \eta_p} = \frac{1000 \times 9.81 \times 0.05 \times 58.708}{0.9 \times 0.9} = 33.551 \text{ kW}$$


The D. E. Shaw group is hiring.
You can do the math.
 Meet us on-campus this semester.
 Check out www.deshaw.com for more info.

DE Shaw & Co



- 2.6 A jet of water strikes a stationary flat plate “perpendicularly”, if the jet diameter is 7.5 cm and its velocity upon impact is 30 m/s, determine the magnitude and direction of the resultant force on the plate, neglect frictional effect and take water density as 1000 kg.m^3 .

Ans (3970 N)

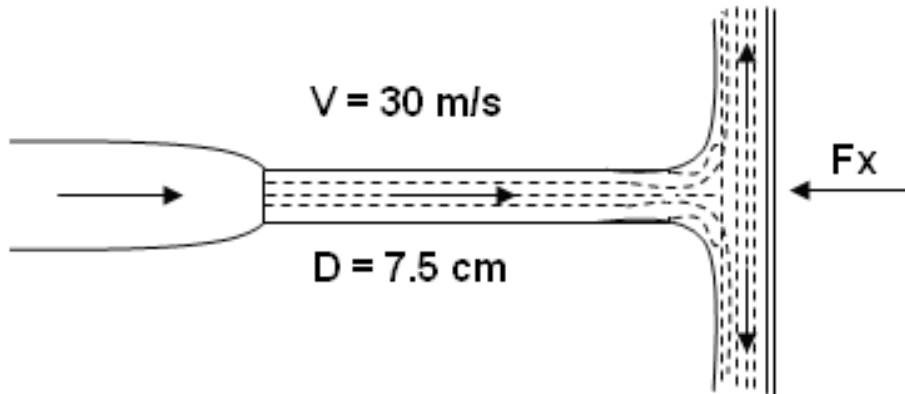

Solution:

$$A = \frac{\pi}{4} D^2 = \frac{\pi}{4} \times 0.075^2 = 4.418 \times 10^{-3} \text{ m}^2$$


$$F_x = \rho A V^2 (1 - \cos \theta)$$

$$F_x = 1000 \times 4.418 \times 10^{-3} \times 30^2 \times (1 - 0)$$

$$F_x = 3976 \text{ N}$$

- 2.7 A horizontally laid pipe carrying water has a sudden contraction in diameter from 0.4m to 0.2m respectively. The pressure across the reducer reads 300 kPa and 200 kPa respectively when the flow rate is 0.5 m³/s. Determine the force exerted on the section due to the flow, assuming that friction losses are negligible.

Ans: (25.5 kN)

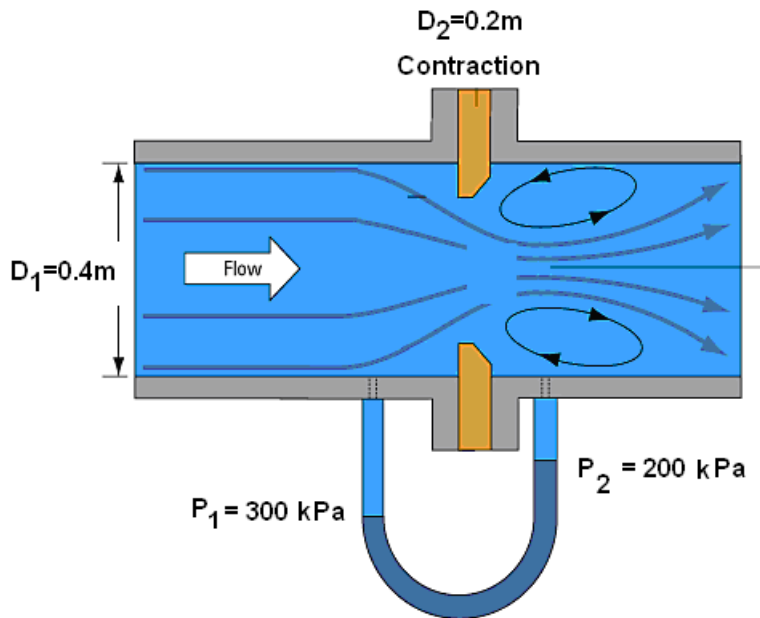

Solution:

$$A_1 = \frac{\pi}{4} \times 0.4^2 = 0.1256 \text{ m}^2$$

$$A_2 = \frac{\pi}{4} \times 0.2^2 = 0.0314 \text{ m}^2$$

$$v_1 = \frac{Q}{A_1} = \frac{0.5}{\frac{\pi}{4} \times 0.4^2} = 3.979 \text{ m/s}$$

$$v_2 = \frac{Q}{A_2} = \frac{0.5}{\frac{\pi}{4} \times 0.2^2} = 15.915 \text{ m/s}$$

$$-F_x + p_1 A_1 - p_2 A_2 \cos \theta = \rho \dot{V} (V_2 \cos \theta - V_1)$$

$$-F_x + 300 \times 10^3 \times 0.1256 - 200 \times 10^3 \times 0.0314 \times 1 = 1000 \times 0.5 \times (15.915 - 3.979)$$

$$-F_x + 37680 - 6283 = 5968$$

Hence


$$F_x = 25429 \text{ N}$$

Download free eBooks at bookboon.com

- 2.8 A siphon has a uniform circular bore of 75 mm diameter and consists of a bent pipe with its crest 1.8 m above water level and a discharge to the atmosphere at a level 3.6 m below water level. Find the velocity of flow, the discharge and the absolute pressure at crest level if the atmospheric pressure is 98.1 kN/m². Neglect losses due to friction.

Ans (0.0371 m³/s, 45.1 kN/m²)

Solution:

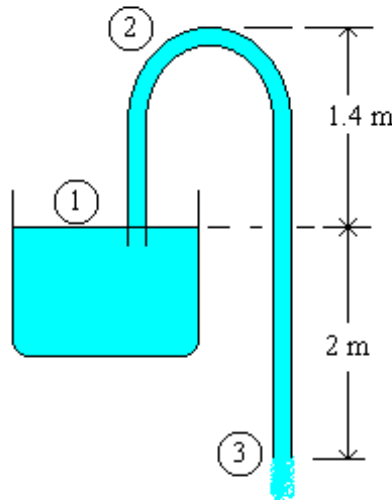

$$\frac{p_1}{\rho g} + \frac{v_1^2}{2g} + z_1 = \frac{p_3}{\rho g} + \frac{v_3^2}{2g} + z_3$$

$$0 + 0 + 3.6 = 0 + \frac{v_3^2}{2g} + 0$$

$$\text{hence} \rightarrow V_3 = \sqrt{2 \times 9.81 \times 3.6} = 8.404 \text{ m/s}$$

$$Q = A \times V = \frac{\pi}{4} D^2 \times V = \frac{\pi}{4} \times 0.075^2 \times 8.404 = 0.037 \text{ m}^3/\text{s}$$

$$\frac{98.1 \times 10^3}{1000 \times 9.81} + 0 = \frac{p_2}{\rho g} + 5.4$$

$$\therefore P_2 = 98.1 \times 10^3 - 5.4 \times 9810 = 45126 \text{ Pa}$$

3 Chapter Three Tutorial Problems

- 3.1 If the vertical component of the landing velocity of a parachute is equal to that acquired during a free fall of 2m, find the diameter of the open parachute (hollow hemisphere) if the total weight of parachute and the person is 950N. Assume for air at ambient conditions, Density = 1.2 kg/m^3 and $C_d = 1.35$

Ans (6.169m)

Solution:



It's only an opportunity if you act on it

IKEA.SE/STUDENT

© Inter IKEA Systems B.V. 2009



$$V_2^2 = V_1^2 + 2as$$

$$V = \sqrt{2 \times 9.81 \times 2} = 6.264 \text{ m/s}$$

NSL:

$$\sum F = 0$$

$$m.g - \frac{1}{2} \rho . V^2 . A_r \times C_d = 0$$


$$950 - \frac{1}{2} \times 1.2 \times 6.264^2 \cdot \left(\frac{\pi}{4}\right) D^2 \times 1.4 = 0$$

$$\text{solve} \rightarrow D = 6.17 \text{ m}$$

- 3.2 A buoy is attached to a weight resting on the seabed; the buoy is spherical with radius of 0.2m and the density of sea water is 1020 kg/m³. Determine the minimum weight required to keep the buoy afloat just above the water surface. Assume the buoy and the chain has a combined weight of 1.2 kg.

Ans (33 kg)

Solution:

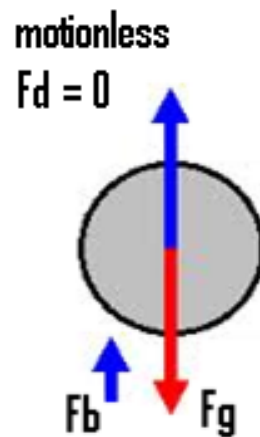

Since the system is stable and motionless, Newton's second law of motion reduces to:

$$\text{Weight} = \text{Upthrust (Buoyancy)}$$

$$F_b = F_g$$

$$\text{Volume of sphere} = \left(\frac{4\pi}{3}\right) \times R^3 = 0.0335 \text{ m}^3$$

$$\text{The Upthrust is } F_b = \rho_{\text{fluid}} \times V_L \times g = 1020 \times 0.0335 \times 9.81 = 335.3 \text{ N}$$

$$\text{Weight} = 9.81 \times (1.2 + \text{Load})$$

$$\text{Hence the payload} = (335.3 / 9.81) - 1.2 = 32.98 \text{ kg}$$

3.3 An aeroplane weighing 65 kN, has a wing area of 27.5 m² and a drag coefficient (based on wing area) $C_D = 0.02 + 0.061 \times C_L^2$. Assume for air at ambient conditions, Density = 0.96 kg/m³. Determine the following when the craft is cruising at 700 km/h:

1. the lift coefficient
2. the drag coefficient, and
3. the power to propel the craft.

Ans (0.13, 0.021, 2040 kW)

Solution:

$$C_L = \frac{F_L}{\left(\frac{1}{2}\right)\rho \cdot A \cdot V^2} = \frac{65 \times 10^3}{\left(\frac{1}{2}\right) \times 0.96 \times 27.5 \times V^2}$$

$$C_D = 0.02 + 0.061 \times C_L^2 = 0.02 + 0.061 \times \left[\frac{65 \times 10^3}{\left(\frac{1}{2}\right) \times 0.96 \times 27.5 \times V^2} \right]^2$$

hence

$$F_D = \frac{1}{2} \rho \cdot V^2 \cdot A_f \times C_D = \frac{1}{2} \times 0.96 \times V^2 \times 27.5 \times (0.02 + 14.79 \times 10^5 \times V^{-4})$$

Power

$$P = F_D \times V = 0.264V^3 + 1.952 \times 10^7 V^{-1}$$

$$V = 700 \text{ km/h} = \frac{700 \times 1000}{3600} = 194.444 \text{ m/s}$$

hence

$$C_L = 14.79 \times 10^5 \times (194.444)^{-4} = 0.13$$

$$C_D = 0.02 + 0.061 \times 0.13^2 = 0.021$$

$$P = 0.264 \times 194.444^3 + 1.952 \times 10^7 / 194.444 = 2041 \text{ kW}$$

- 3.4 A racing car shown below is fitted with an inverted NACA2415 aerofoil with lift to drag given as: $C_d = 0.01 + 0.008 \times C_l^2$

The aerofoil surface area is 1 m^2 and the car weight is 1 kN ; the car maintains a constant speed of 40 m/s , determine at this speed:

1. The aerodynamic drag force on the aerofoil
2. The power required to overcome this drag force



REDEFINE YOUR FUTURE

**AXA GLOBAL
GRADUATE PROGRAM**


redefining / standards 



Assume for air at ambient conditions, take Density = 1.2 kg/m^3

Ans (18 N, 0.7 kW)

Solution:

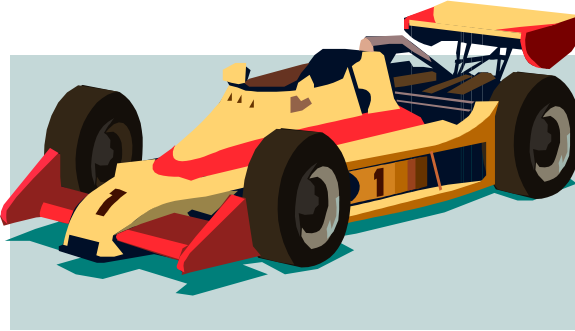

$$C_L = \frac{F_L}{(1/2)\rho \cdot A \cdot V^2} = \frac{1 \times 10^3}{(1/2) \times 1.2 \times 1 \times 40^2} = 1.0417$$

$$C_D = 0.01 + 0.008 \times C_L^2 = 0.01 + 0.008 \times 1.0417^2 = 0.01868$$

$$F_D = \frac{1}{2} \rho \cdot V^2 \cdot A_f \times C_d = \frac{1}{2} \times 1.2 \times 1 \times 40^2 \times 0.01868 = 17.9 \text{ N}$$

$$\text{Power} = F_D \times V = 17.9 \times 40 = 0.717 \text{ kW}$$

3.5 Air flows over a sharp edged flat plate, 3m long and 3m wide at a velocity of 2 m/s.

1. Determine the drag force
2. Determine drag force if the plate was mounted perpendicular to the flow direction assume $C_d = 1.4$.

For air, take density as 1.23 kg/m^3 , and kinematic viscosity as $1.46 \times 10^{-5} \text{ m}^2/\text{s}$.

Ans (0.05N, 31N)

Solution:

1.

$$Re_l = \frac{V_\infty x L}{\nu} = \frac{2 \times 3}{1.46 \times 10^{-5}} = 4.11 \times 10^5 < 5 \times 10^5 \rightarrow \text{Laminar}$$

$$C_D = \frac{1.328}{(Re)^{0.5}} = 0.00207$$

$$F_D = \frac{1}{2} \rho \cdot A \cdot V_\infty^2 \times C_D = \frac{1}{2} \times 1.23 \times (3 \times 3) \times 2^2 \times 0.00207 = 0.045 \text{ N}$$

2.

$$Cd = 1.4$$

$$F_D = \frac{1}{2} \rho \cdot A \cdot V_\infty^2 \times C_D = \frac{1}{2} \times 1.23 \times (3 \times 3) \times 2^2 \times 1.4 = 30.4 \text{ N}$$

3.6 (a) An airplane wing has a 7.62m span and 2.13m chord. Estimate the drag on the wing (two sides) treating it as a flat plate and the flight speed of 89.4 m/s to be turbulent from the leading edge onward.

(b) Determine the reduction in power that can be saved if the boundary layer control device is installed on the wing to ensure laminar flow over the entire wing's surface.

For air, take density as 1.01 kg/m^3 , and kinematic viscosity as $1.3 \times 10^{-5} \text{ m}^2/\text{s}$.

Ans (358 N, 86%)

Solution:

$$C_D = \frac{1.328}{\sqrt{Re_L}} \quad \text{laminar, } Re_L < 5 \times 10^5$$

$$C_D = \frac{0.074}{[Re_L]^{1/5}} \quad \text{turbulent, } 5 \times 10^5 \leq Re_L < 10^7$$

a)

$$Re_l = \frac{V_\infty x L}{\nu} = \frac{89.4 \times 2.13}{1.3 \times 10^{-5}} = 1.265 \times 10^7 > 5 \times 10^5 \rightarrow \text{Turbulent}$$

$$C_D = \frac{0.074}{(Re)^{0.2}} = 0.00273$$

$$F_D = \frac{1}{2} \rho \cdot A \cdot V_\infty^2 \times C_D = \frac{1}{2} \times 1.01 \times (2 \times 7.62 \times 2.13) \times 89.4^2 \times 0.00273 = 357.6 \text{ N}$$

$$\text{Power} = F_D \times V = 357.6 \times 89.4 = 31.969 \text{ kW}$$

b) laminar.

$$C_D = \frac{1.328}{(1.265 \times 10^7)^{0.5}} = 0.00037$$

$$F_D = \frac{1}{2} \rho \cdot A \cdot V_\infty^2 \times C_D = \frac{1}{2} \times 1.01 \times (2 \times 7.62 \times 2.13) \times 89.4^2 \times 0.00037 = 48.9 \text{ N}$$

$$\text{Power} = F_D \times V = 48.9 \times 89.4 = 4.372 \text{ kW}$$

$$\% \text{reduction} = 86.3\%$$

I'm with ZF.
Engineer and Easy Rider.

I enjoy motorcycle riding as a hobby. My mind is free and clear. I just feel great. Especially in this famous region where I live and work. Riding on the legendary Blue Ridge Parkway with its beautiful scenic views is breathtaking. I have a great life and a great job. The doors are always open and everybody helps each other out. My name is Charles Jenkins and I'm working as a quality engineer. For more about me, what I do, and why I really enjoy working at ZF, go to www.im-with-zf.com.

DriveLine and Chassis Technology

Charles Jenkins
Quality Engineer
ZF Friedrichshafen AG
North Carolina/USA

www.im-with-zf.com



4 Chapter Four Tutorial Problems

4.1 Assuming the ideal gas model holds, determine the velocity of sound in

- a) air (*mwt* 28.96) at 25°C, with $\gamma = 1.4$,
- b) argon (*mwt* 39.95) at 25°C, with $\gamma = 1.667$.

Ans: [346 m/s, 321.5 m/s]

Solution:

For air at 25 °C

$$R = 8314.4 / 28.96 = 287.096 \text{ J/kgK}$$

$$a = [\gamma R T]^{1/2} = (1.4 (287.096 \text{ J/K kg}) (298\text{K}))^{1/2} = 346.029 \text{ (m/s)}$$

For Argon

$$R = 8314.3 / 39.95 = 208.117 \text{ J/kgK}$$

$$a = [\gamma R T]^{1/2} = (1.667 (208.117 \text{ J/K kg}) (298\text{K}))^{1/2} = 321.536 \text{ (m/s)}$$

4.2 An airplane can fly at a speed of 800km/h at sea-level where the temperature is 15°C. If the airplane flies at the same Mach number at an altitude where the temperature is -44°C, find the speed at which the airplane is flying at this altitude.

Ans: [195m/s]

Solution:

$$\begin{aligned} a &= [\gamma R T]^{1/2} \\ &= (1.4 \times 287 \times (273 + 15))^{1/2} \\ &= 346.17 \text{ (m/s)} \end{aligned}$$

$$V_1 = 800 \text{ km/h} = 800 \times 1000 / 3600 = 222.222 \text{ m/s}$$

$$M = V/a = 222.222 / 346.17 = 0.642$$

$$\begin{aligned} a_2 &= [\gamma R T]^{1/2} \\ &= (1.4 \times 287 \times (273 - 44))^{1/2} \\ &= 303.33 \text{ (m/s)} \end{aligned}$$

Hence

$$V_2 = M \times a_2 = 303.33 \times 0.642 = 195 \text{ m/s}$$

- 4.3** A low flying missile develops a nose temperature of 2500K when the ambient temperature and pressure are 250K and 0.01 bar respectively. Determine the missile velocity and its stagnation pressure. Assume for air: $\gamma = 1.4$. $C_p = 1005 \text{ J/kgK}$

Ans: [2126 m/s, 31.6 bar]

Solution:

$$C_p = C_v + R$$

$$C_p = C_p / \gamma + R$$

hence

$$R = \frac{(\gamma - 1)}{\gamma} \times C_p = \frac{1.4 - 1}{1.4} \times 1005 = 287.143 \text{ J/kgK}$$

$$T_o - T = V^2 / 2C_p$$

$$V = \sqrt{2 \times C_p \times (T_o - T)} = \sqrt{2 \times 1005 \times (2500 - 250)} = 2126.67 \text{ m/s}$$

$$\frac{P_o}{P} = \left[1 + \frac{V^2}{2 \cdot C_p \cdot T} \right]^{\frac{\gamma}{\gamma - 1}}$$

$$\begin{aligned} P_o &= P \left[1 + \frac{V^2}{2 \cdot C_p \cdot T} \right]^{\frac{\gamma}{\gamma - 1}} \\ &= 0.01 \times \left[1 + \frac{2126.67^2}{2 \times 1005 \times (273 + 250)} \right]^{\frac{1.4}{0.4}} = 31.6 \text{ bar} \end{aligned}$$

- 4.4** An airplane is flying at a relative speed of 200 m/s when the ambient air condition is 1.013 bar, 288 K. Determine the temperature, pressure and density at the nose of the airplane. Assume for air: $\gamma = 1.4$, density at ambient condition = 1.2 kg/m^3 and $C_p = 1005 \text{ J/kgK}$.

Ans: [$T_o = 307.9 \text{ K}$, $P_o = 1.28 \text{ bar}$, $\rho = 1.42 \text{ kg/m}^3$]

Solution:

$$T_o = T + \frac{V^2}{2\gamma C_p} = 288 + \frac{200^2}{2 \times 1005} = 307.9 \text{ K}$$

$$\frac{P_o}{P} = \left[1 + \frac{V^2}{2C_p T}\right]^{\frac{\gamma}{\gamma-1}}$$

$$P_o = P \left[1 + \frac{V^2}{2C_p T}\right]^{\frac{\gamma}{\gamma-1}} = 1.013 \times \left[1 + \frac{200^2}{2 \times 1005 \times 288}\right]^{\frac{1.4}{0.4}} = 1.28 \text{ bar}$$

$$\rho_o = \frac{P_o}{R T_o} = \frac{1.28 \times 10^5}{287 \times 307.9} = 1.448 \text{ kg/m}^3$$

$$\rho_o = \rho \left[\frac{P_o}{P}\right]^{\frac{1}{\gamma}} = 1.2 \times \left[\frac{1.28}{1.013}\right]^{1/1.4} = 1.418 \text{ kg/m}^3$$

At Navigant, there is no limit to the impact you can have. As you envision your future and all the wonderful rewards your exceptional talents will bring, we offer this simple guiding principle: It's not what we do. It's how we do it.

Impact matters.

NAVIGANT
navigant.com

DISPUTES & INVESTIGATIONS • ECONOMICS • FINANCIAL ADVISORY • MANAGEMENT CONSULTING

©2013 Navigant Consulting, Inc. All rights reserved. Navigant Consulting is not a certified public accounting firm and does not provide audit, attest, or public accounting services.
See navigant.com/licensing for a complete listing of private investigator licenses.



5 Chapter Five Tutorial Problems

- 5.1 A small-scale hydraulic power system has an elevation difference between the reservoir water surface and the pond water surface downstream of the turbine is 10 m. The flow rate through the turbine is 1 m³/s. The turbine/generator efficiency is 83%. Determine the power produced if:
- Flow losses are neglected.
 - Assume friction loss equivalent to 1 m head.

Ans: (81 kW, 73 kW)

Solution:

a)

$$\text{losses} = 0\text{m}$$

$$P_A = \rho g Q H \eta = 1000 \times 9.81 \times 1 \times 10 \times 0.83 = 81.4 \text{ kW}$$

b)

$$\text{losses} = 1\text{m}$$

$$P_B = 1000 \times 9.81 \times 1 \times (10 - 1) \times 0.83 = 73.26 \text{ MW}$$

- 5.2 A hydro-electric power plant based on the Loch Sloy in Scotland has an effective head of 250 metres. If the flow rate of 16 m³/s can be maintained, determine:
- the total power input to the turbine assuming a hydraulic efficiency of 98%; and
 - the pressure difference across the turbine.

Ans: (38 MW, 2.4 MPa)

Solution:

The power available from water is

$$\begin{aligned} P &= \rho Q g h \times \eta \\ &= 1000 \times 16 \times 9.81 \times 250 \times 0.98 \\ &= 38455.2 \text{ kW which is } 38 \text{ MW.} \end{aligned}$$

The power can also be expressed as $P = Q \times \Delta p$

Hence

$$\begin{aligned}\Delta p &= P / Q \\ &= 38455200 / 16 \\ &= 2.403 \text{ MPa}\end{aligned}$$

- 5.3 A proposed hydropower plant to be built using a reservoir with a typical head of 18m and estimated power of 15 MW. You are given the task to select an appropriate type of turbine for this site if the generator requires the turbine to run at a fixed speed of 120 rpm.

Ans: ($N_s=396$, Francis or Kaplan)

Solution

Type of Turbine	Specific speed range $N_s = N \frac{P^{1/2}}{(h)^{5/4}}$
Francis	70–500
Propeller	600–900
Kaplan	350–1000
Cross-flow	20–90
Turgo	20–80
Pelton, 1-jet	10–35
Pelton, 2-jet	10–45

$$N_s = N \frac{P^{1/2}}{(h)^{5/4}} = 120 \times \frac{15000^{0.5}}{18^{1.25}} = 396.4$$

hence – Francis or Kaplan

Solution of Mock Exam

Sample Examination Paper



Success here is about overcoming challenges – especially the ones we didn't even think of. I look forward to that.

- Scott, Mechanical Engineering Group Leader

Collaborating. Inspiring. Leading.

Monsanto has always embraced innovation and always focused on helping to make a better world. You can see it in our groundbreaking products and in our dynamic environment where your skills and your career can grow and develop. We know that every day, new ideas can come from anyone, anywhere. At Monsanto, you'll be respected, you'll contribute to the bottom line and you'll help farmers feed the world.

Start right now: www.monsanto.com/students

EEO/AA EMPLOYER M/F/D/V ©2013 Monsanto Company

MONSANTO 





Class Test – Fluid Mechanics

Module Tutor T. Al-Shemmeri

This Paper contains TEN questions. Attempt all questions.

A formulae sheet is provided.

Place your Answers in the space provided. No detailed solution required.

Print your name on every page. Submit all together for marking.

MARKING GRID LEAVE BLANK PLEASE

question	1	2	3	4	5	6	7	8	9	10	total
1 st Marker											
2 nd marker											

Agreed percentage	
Recommended grade	

Question One

List TWO types of instrument used to measure the pressure of a toxic fluid contained in a sealed tank.
Complete the table below:


Type	Principle	Marks
Standard Bourdon gauge	Expansion of a helical element when stressed by the action of pressure/force	/ 4 marks
Piezometer – closed	A piezometer is a device used to measure static liquid pressure in a system by measuring the height to which a column of the liquid rises against gravity	/ 4 marks

Total (8 marks)

Question Two

- a) Draw (not to scale) the pressure distribution of the water on the dam shown below:

(6 marks)

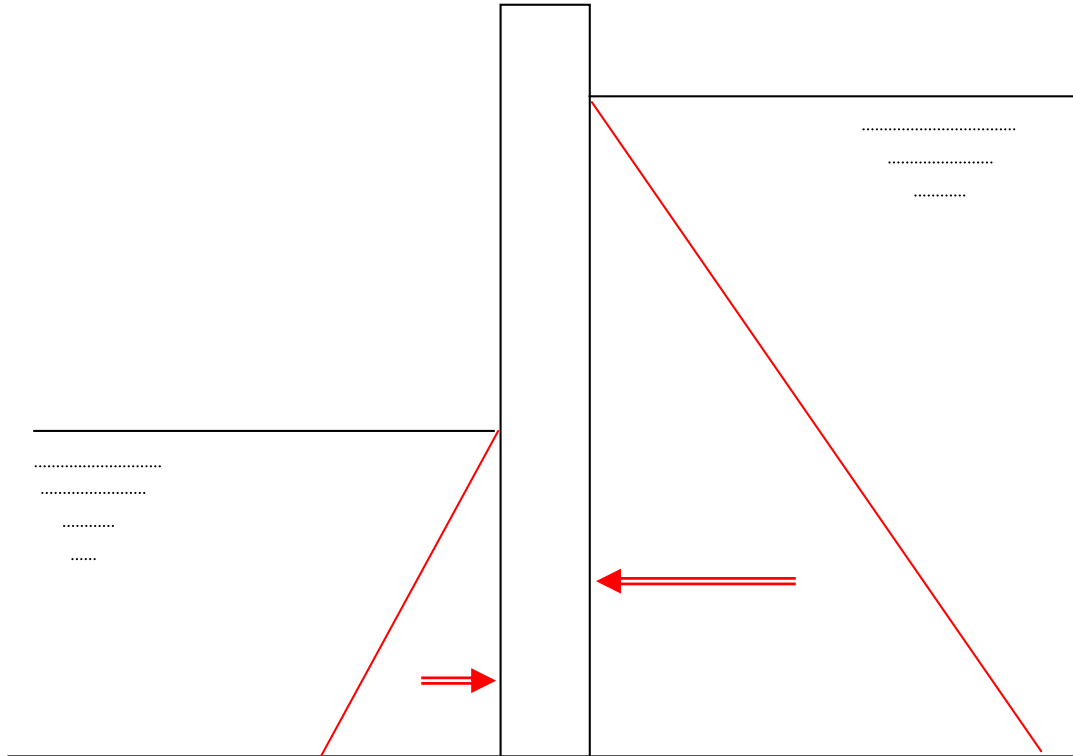

- b) Indicate on the sketch, the direction of the resultant force on the dam?

(2 marks)

- c) Approximately, indicate the position of the centre of pressure on both sides.

(2 marks)

Total (10 marks)


Question Three

List Three methods used to improve the resolution of detecting a small pressure reading in a manometer. Complete the table below:

Method	Principle	Marks
Incline one limb	Trigonometry will mean the sensitivity can be improved by reading the longest side of a triangle. Read ($L \sin(\theta)$) instead of reading (h)	/ 3 marks
Use different size (cross-sectional area) for either side of the manometer.	Help is derived from the continuity law, or displaced volume on either side to remain the same, $A_1 z_1 = A_2 z_2$, so z_2 can be much larger if A_2 is smaller than A_1 .	/ 3 marks
Use different fluids with appreciably different density values.	This uses the conservation of mass, for the displaced column on either side of the manometer.	/ 3 marks

Total (9 marks)

Question Four

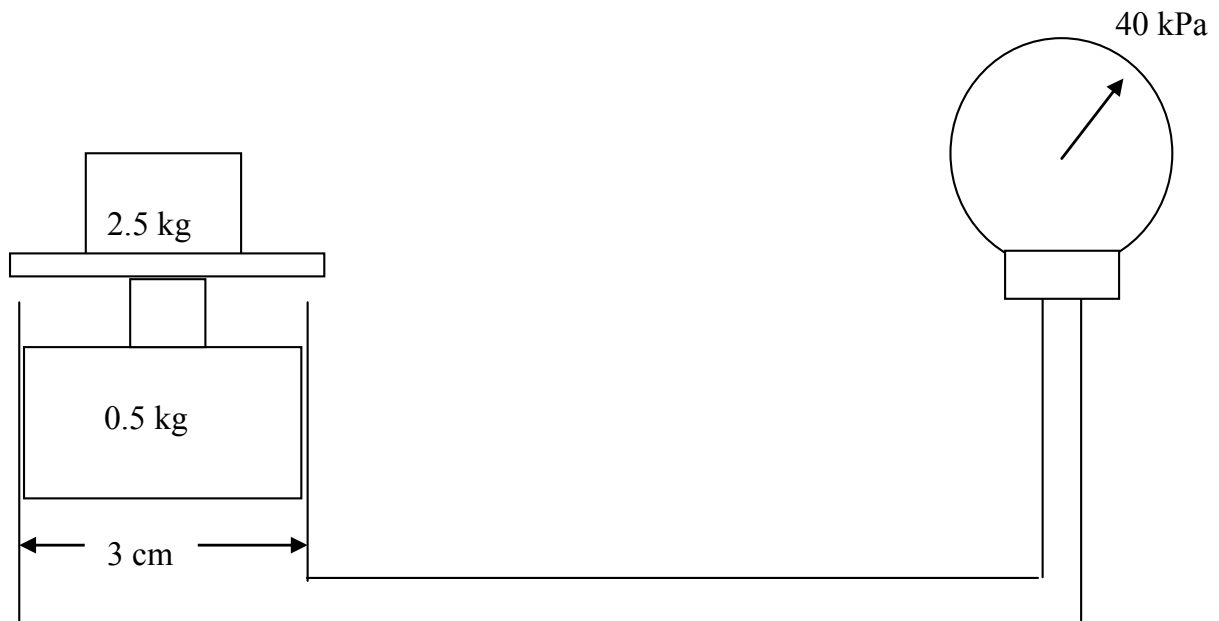

Complete the table below:

Theoretical reading of the pressure $P = F / A = (2.5+0.5) \times 9.81 / (3.14 \times 0.03^2 / 4)$	41635	/ 4 marks
% error $= [(41.635 - 40.000) / 41.635] \times 100\%$	3.93%	/ 3 marks
The maximum load if the gauge limit is 100 kPa $F = P \times A = 100 \times 10^3 \times (3.14 \times 0.03^2 / 4)$	70.686 N = 7.2 kg	/ 3 marks


Total (10 marks)

Question Five

If the fan, below, circulates air at the rate of $0.30 \text{ m}^3/\text{s}$, determine the velocity in each section. Complete the table below.

Section	Dimensions m	Area m^2	Velocity m/s	Marks
1	0.25 square	$0.25 \times 0.25 = 0.0625 \text{ m}^2$	$V_1 = Q/A$ $= 0.3/0.0625$ $= 4.8 \text{ m/s}$	/ 5 marks
2	0.20 diameter	$(3.14/4) \times 0.2^2 = 0.0314 \text{ m}^2$	$V_2 = Q/A$ $= 0.3/0.0314$ $= 9.5 \text{ m/s}$	/ 5 marks

Total (10 marks)

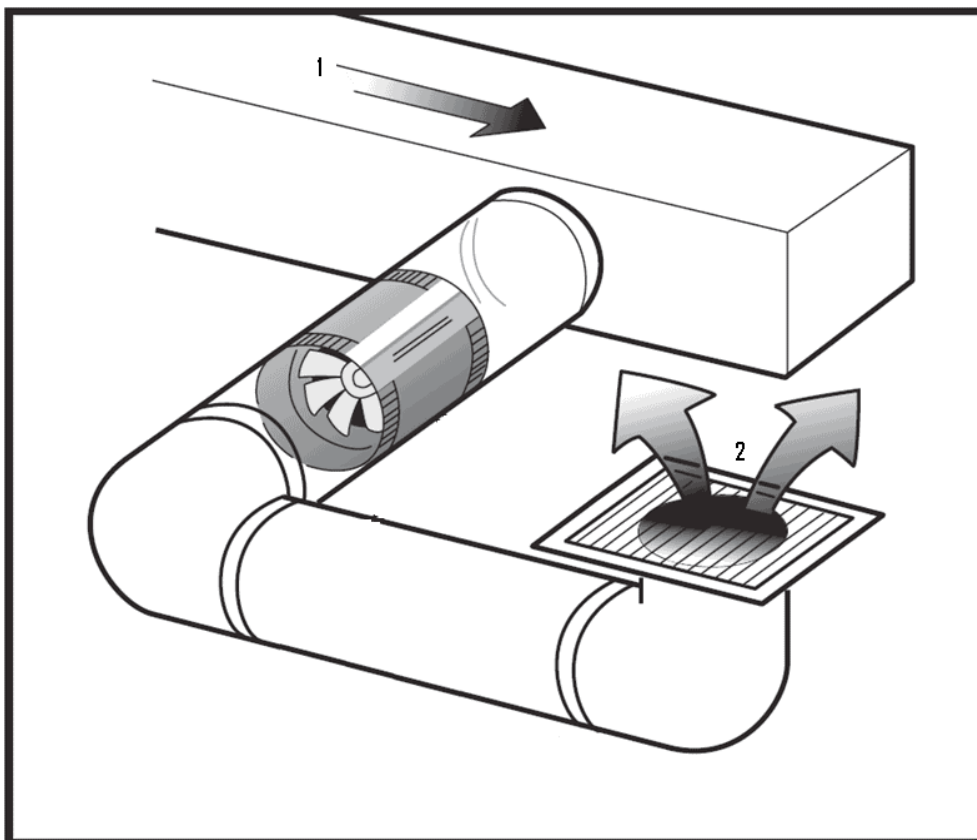

Question Six

Oil of relative density 0.90 flows at the rate of 100 kg/s in a horizontal pipe of 200 mm diameter, 1 km long. If the friction factor for the pipe is 0.006, complete the following table:

Quantity	Value	Units	Marks
flow velocity $m = \text{density} \times A \times V$ hence $V = m / (\text{den} \times A)$	3.537	m/s	/ 3 marks
frictional head loss $h = (4f L/D) \times V^2/2g$	$= (4 \times 0.006 \times 1000/0.2) \times (3.537^2/19.62)$ $= 76.5$	m	/ 3 marks
frictional pressure loss $P = \text{den} \times g \times h$	$= 900 \times 9.81 \times 76.5$ $= 675$	kPa	/ 2 marks
energy to overcome friction $E = m \cdot g \cdot h$	$= 100 \times 9.81 \times 76.5$ $= 75$	kW	/ 2 marks

Total (10 marks)



Are you the surfer or the wave?

Creating the future of communications technology requires to be a powerful force for change and at the same time be swift and agile enough to deliver even in varying conditions. Which is why when you look at our history of innovation you'll find countless awards and even a handful of Nobel Prizes in our company résumé. And when you look at our teams, you will find dynamic, diverse, passionate professionals. Hand-in-hand, team by team, every day we bring innovations to market to help realize the potential of a connected world.

..... Alcatel-Lucent 

www.alcatel-lucent.com/careers



Question Seven

Show that Bernoulli's equation is dimensionally homogeneous

3 marks for the p-term,

3 marks for the v-term, and

2 marks for the z-term and

2 for stating that all dimensions have/have not the same dimensions

Total (10 marks)

Solution:

Take each term separately

$$(a) \frac{p}{\rho g} \Leftrightarrow \frac{MLT^{-2}}{(ML^{-3})(LT^{-2})} \Leftrightarrow L \Leftrightarrow m$$

$$(b) \frac{V^2}{2g} \Leftrightarrow \frac{(L/T)^2}{(0)(LT^{-2})} \Leftrightarrow L \Leftrightarrow m$$

$$(c) Z \Leftrightarrow (L) \Leftrightarrow m$$

All terms have the same units of meters. The equation is therefore dimensionally balanced.

Question Eight

Oil (relative density 0.85, kinematic viscosity 80cs) flows at the rate of 90 tonne per hour along a 100 mm bore smooth pipe. Determine for the flow:

Quantity	Value	Marks
flow velocity $A = (\pi/4) \times D^2$ $m = 90 \text{ t/h}$ $= 90 \times 1000/3600$ $V = m / A / \text{density}$	 0.00785 m ² 25 kg/s 3.745 m/s	/ 5 marks
Nature of the flow $\text{New} = 80 \text{ cs}$ $= 80 \times 10^{-6} \text{ m}^2/\text{s}$ $\text{Re} = \text{den} \times V \times D / \mu$ $= V \times D / \text{New}$	 $\text{Re} = 3.745 \times 0.1 / 80 \times 10^{-6}$ $\text{Re} = 4682$ Hence flow turbulent	/ 5 marks
frictional factor $f = 0.079 / \text{Re}^{0.25}$	 $f = 0.0095$	/ 2 marks

Total (12 marks)

Question Nine

List two instruments for measuring the flow rate of air through a rectangular duct.

Method	Principle	marks
Hot wire Anemometer	use a very fine wire (on the order of several micrometres) electrically heated up to some temperature above the ambient. Air flowing past the wire has a cooling effect on the wire. Uses the relationship between the electrical resistance of the wire and the flow speed.	/ 4 marks
Pitot-static tube	Relies on the measured static and dynamic pressures to determine the fluid velocity using Bernoulli's equation.	/ 4 marks

Total (8 marks)

QUESTION TEN

Draw the body force diagram for a parachute jumper.

If the vertical component of the landing velocity of a parachute is 6 m/s, find the total weight of the parachutist and the parachute (hollow hemisphere Diameter 5m).

Assume for air at ambient conditions, Density = 1.2 kg/m^3 and $C_d = 2.3$

For correct body force diagram

/2 marks

For correct use of formula

/ 6 marks

For correct answer

/ 2 marks

Total (10 marks)

Budget-Friendly. Knowledge-Rich.

The Agilent InfiniiVision X-Series and 1000 Series offer affordable oscilloscopes for your labs. Plus resources such as lab guides, experiments, and more, to help enrich your curriculum and make your job easier.



Scan for free Agilent iPhone Apps or visit qrs.ly/po20pli

© Agilent Technologies, Inc. 2012


See what Agilent can do for you.
www.agilent.com/find/EducationKit

u.s. 1-800-829-4444 canada: 1-877-894-4414

Anticipate — Accelerate — Achieve

 **Agilent Technologies**



Solution

The free body diagram shows that the body is affected by 3 forces.

Newton's second law of motion states that when the object is moving at steady state then the net force on the object must be zero

$$\text{Hence } F_g = F_b + F_d$$

Since the parachute is open, the buoyancy force will be negligible and only due to the body of the person, which is small in comparison to the parachute size. $F_b = 0$

NSL :

$$\sum F = 0 \rightarrow F_w - F_d = 0$$

$$F_w - \frac{1}{2} \rho V^2 A_f C_d = 0$$

$$F_w = \frac{1}{2} \times 1.2 \times 6^2 \times \left(\frac{\pi}{4}\right) \times 5^2 \times 2.3 = 975 \text{ N} = 99.4 \text{ kg}$$

Formulae Sheet

FLUID STATICS:

$$P = \rho g h$$

CONTINUITY EQUATION:

$$\text{mass flow rate} \quad m = \rho A V$$

$$\text{volume flow rate} \quad Q = A V$$

Energy Equation

$$(P/\rho g) + (V^2/2g) + Z = \text{constant}$$

DARCY'S EQUATION

$$H_f = (4 f L / D) (V^2/2g)$$



The financial industry needs a strong software platform
That's why we need you

Working at SimCorp means making a difference. At SimCorp, you help create the tools that shape the global financial industry of tomorrow. SimCorp provides integrated software solutions that can turn investment management companies into winners. With SimCorp, you make the most of your ambitions, realising your full potential in a challenging, empowering and stimulating work environment.

Are you among the best qualified in finance, economics, computer science or mathematics?

Find your next challenge at www.simcorp.com/careers

Mitigate risk | Reduce cost | Enable growth
simcorp.com

SimCorp

"When I joined SimCorp, I was very impressed with the introduction programme offered to me."

Meet Lars and other employees at simcorp.com/meetouremployees



FRICTION FACTOR FOR A SMOOTH PIPE

$$f = 16 / \text{Re} \quad \text{if } \text{Re} < 2000$$

$$f = 0.079 / \text{Re}^{0.25} \quad \text{if } \text{Re} > 4000$$

MOMENTUM EQUATION

$$F = m (V_2 \cos\theta - V_1)$$

$$\text{Drag FORCE} = C_d \times (1/2) \times \rho \cdot A \cdot V^2$$

FLUID POWER

$$E = \rho g h Q$$