

PETRONAS TECHNICAL STANDARDS

TECHNICAL SPECIFICATION

CONCRETE COATING OF LINEPIPE

PTS 31.40.30.30

January 2011



© 2011 PETROLIAM NASIONAL BERHAD (PETRONAS)

All rights reserved. No part of this document may be reproduced, stored in a retrieval system or transmitted in any form or by any means (electronic, mechanical, photocopying, recording or otherwise) without the permission of the copyright owner.

PTS Circular 2011 - 1



PTS No:	31.40.30.30
PTS Title:	Concrete Coating of Linepipe

PTS Updates

This revision of PTS **31.40.30.30 – Concrete Coating of Linepipe (Jan 2011, Revision 1)** has been updated to incorporate PETRONAS Lessons Learnt, Best Practice and new information issued by relevant industry code and standards. All updates in the document are highlighted in *italic* font.

The previous version of this PTS **31.40.30.30 (December 1999), 20.123 (Sept.85) & 20.147 (Oct 94)** will be removed from PTS binder / e-repository from herein onwards.

The custodian of this PTS is:

Name: Ahmad Sirwan bin Mat Tuselim

Tel. No: 03-27836217

Please direct any questions regarding this PTS to the above-named.

Document Approval

	Name	Designation	Date	Signature
Prepared	Noorfuziha bt Abd Halin	Pipeline Engineer	27/1/11	
Reviewed	Ahmad Sirwan bin Mat Tuselim	Principal Engineer (Pipeline)	28/1/11	
Approved	Rosman bin Arifin	Technical Authority (Pipeline)	28/1/11	
Verified	Hashim bin Zainal Abidin	Senior Manager, Civil, Structure, Pipeline, Engineering, GTS	09/02/11	
Endorsed	Pau Kiew Huai	Senior General Manager, GTS	10/2/11	

Revision History

Rev No.	Reviewed by	Approved by	Date

Document No. : PTS 31.40.30.30

Document Title: Concrete Coating of Linepipe

Acknowledgement

Special thank to the following personnel who have reviewed and contributed their ideas, lesson learnt, best practices and information in updating this PTS.

- | | |
|-------------------------------------|------|
| 1. Ir Hj Ahmad Khairiri Abdul Ghani | PCSB |
| 2. Julina Bt Samsu | PCSB |
| 3. Jewel Buri | PCSB |
| 4. Ab Rashid Mat Derus | PCSB |
| 5. Khairan Syuhada Bt Kassim | PCSB |
| 6. Ghazali B M Zin | PCSB |
| 7. Jamil Jamaluddin | GTS |

PREFACE

PETRONAS Technical Standards (PTS) publications reflect the views, at the time of publication, of PETRONAS OPU/Divisions.

They are based on the experience acquired during the involvement with the design, construction, operation and maintenance of processing units and facilities. Where appropriate they are based on, or reference is made to, national and international standards and codes of practice.

The objective is to set the recommended standard for good technical practice to be applied by PETRONAS' OPU in oil and gas production facilities, refineries, gas processing plants, chemical plants, marketing facilities or any other such facility, and thereby to achieve maximum technical and economic benefit from standardisation.

The information set forth in these publications is provided to users for their consideration and decision to implement. This is of particular importance where PTS may not cover every requirement or diversity of condition at each locality. The system of PTS is expected to be sufficiently flexible to allow individual operating units to adapt the information set forth in PTS to their own environment and requirements.

When Contractors or Manufacturers/Suppliers use PTS they shall be solely responsible for the quality of work and the attainment of the required design and engineering standards. In particular, for those requirements not specifically covered, it is expected of them to follow those design and engineering practices which will achieve the same level of integrity as reflected in the PTS. If in doubt, the Contractor or Manufacturer/Supplier shall, without detracting from his own responsibility, consult the owner.

The right to use PTS rests with three categories of users:

- 1) PETRONAS and its affiliates.
- 2) Other parties who are authorised to use PTS subject to appropriate contractual arrangements.
- 3) Contractors/subcontractors and Manufacturers/Suppliers under a contract with users referred to under 1) and 2) which requires that tenders for projects, materials supplied or - generally - work performed on behalf of the said users comply with the relevant standards.

Subject to any particular terms and conditions as may be set forth in specific agreements with users, PETRONAS disclaims any liability of whatsoever nature for any damage (including injury or death) suffered by any company or person whomsoever as a result of or in connection with the use, application or implementation of any PTS, combination of PTS or any part thereof. The benefit of this disclaimer shall inure in all respects to PETRONAS and/or any company affiliated to PETRONAS that may issue PTS or require the use of PTS.

Without prejudice to any specific terms in respect of confidentiality under relevant contractual arrangements, PTS shall not, without the prior written consent of PETRONAS, be disclosed by users to any company or person whomsoever and the PTS shall be used exclusively for the purpose they have been provided to the user. They shall be returned after use, including any copies which shall only be made by users with the express prior written consent of PETRONAS.

The copyright of PTS vests in PETRONAS. Users shall arrange for PTS to be held in safe custody and PETRONAS may at any time require information satisfactory to PETRONAS in order to ascertain how users implement this requirement.

TABLE OF CONTENTS

1.	INTRODUCTION.....	7
1.1	SCOPE.....	7
1.2	DISTRIBUTION, INTENDED USE AND REGULATORY CONSIDERATIONS.....	7
1.3	DEFINITIONS.....	8
1.4	ACTION ITEMS.....	8
1.5	CROSS-REFERENCES.....	8
2.	MATERIALS.....	9
2.1	LINEPIPE.....	9
2.2	CEMENT.....	9
2.3	SAND/AGGREGATES.....	10
2.4	WATER.....	11
2.5	ADDITIVES.....	11
2.6	REINFORCEMENT STEEL.....	11
3.	EQUIPMENT.....	12
4.	COATING PROCESS.....	13
4.1	COATING PROCEDURE SPECIFICATION.....	12
4.2	COATING PROCEDURE QUALIFICATION TESTING.....	13
4.3	PROPORTIONING OF MATERIALS.....	13
4.4	APPLICATION OF CONCRETE COATING.....	13
4.5	CURING.....	16
5.	INSPECTION AND TESTING.....	17
5.1	GENERAL.....	17
5.2	MISCELLANEOUS INSPECTIONS/TESTS.....	18
5.3	STRENGTH AND DENSITY TESTING.....	19
5.4	DETERMINATION OF SUBMERGED WEIGHT.....	19
5.5	WATER ABSORPTION TEST.....	20
5.6	IMPACT TESTING.....	22
6.	REPAIRS.....	23
6.1	GENERAL.....	23
6.2	DAMAGED AREAS.....	24
6.3	CRACKS.....	24
6.4	CORE HOLES/INSPECTION AREAS.....	24
7.	INSTALLATION OF ANODES.....	25
7.1	UNLOADING, HANDLING, STORAGE AND CLEANING.....	25
7.2	INSTALLATION.....	25
7.3	ELECTRICAL CONNECTIONS.....	25
7.4	INSPECTION AND TESTING.....	26
8.	PIPE IDENTIFICATION.....	26
8.1	GENERAL.....	26
8.2	MARKING.....	26
9.	HANDLING, STOCKPILING AND LOADING OUT OF CONCRETE-COATED PIPE.....	28
10.	DOCUMENTATION.....	29
10.1	GENERAL.....	29
10.2	PIPE TALLY RECORDS.....	29
10.3	LOGGING AND RECORDING OF DATA.....	29
11.	SUMMARY OF REQUIRED PRINCIPAL'S APPROVALS.....	30
12.	SUMMARY OF INSPECTIONS/TESTS.....	31
13.	SCOPE OF WORK CHECKLIST.....	32
14.	FIGURES.....	33

15.	REFERENCES.....	36
-----	-----------------	----

APPENDICES

APPENDIX 1	SOME IMPORTANT DESIGN ASPECTS	37
------------	-------------------------------------	----

1. INTRODUCTION

1.1 SCOPE

This PTS specifies requirements and gives recommendations for the materials, application and testing of reinforced concrete coating on the exterior surface of steel linepipe (which has been coated previously with anti-corrosion coating) for use in marine environments, estuaries, rivers, wadis, swamps etc.

This PTS is a revision of the PTS publication with the same number and title issued in December 1999.

This PTS is written on the assumption that it will be used as the technical specification incorporated into a coating contract. It could, however, be used as an attachment to a purchase order.

- (P) The concrete is classified as either strength Grade A, AA or B, as specified by the Principal in the contract Scope of Work. The choice of grade is made during the detailed design stage of the pipeline project, based on the external forces the line pipe will be subjected to during installation and operation, e.g. related to water depth, required tensions etc. Grade A is intended for more arduous in-service and/or installation conditions than Grade B coating, e.g. Grade B is intended for estuaries, rivers, wadis and swamp use (see 5.3.3 and 5.5) whereas Grade A is intended for deeper waters. *Higher grade such as Grade AA can be used if specified by Scope of Work. Grade AA is intended for dropped object zone.*

Concrete for coating of PETRONAS pipelines shall have a density of 3044 kg/m³ when saturated with sea water.

This PTS includes the installation of anodes (including thermit welds) but excludes the design or purchase of anodes.

The scope of this PTS does not include:

- specific design requirements (these would be established in the pipeline design);
- the choice of anti-corrosion coating or its application;
- the design, purchase and installation of buckle/crack arrestors;
- the use of intermediate coatings (e.g. anti-slip coatings);
- slotting of the concrete to reduce bending stiffness;
- concrete coating thicknesses less than 25 mm.

NOTE: Important aspects of these excluded items are briefly discussed in (Appendix 1).

1.2 DISTRIBUTION, INTENDED USE AND REGULATORY CONSIDERATIONS

Unless otherwise authorised by PETRONAS, the distribution of this PTS is confined to companies forming part of the PETRONAS Group and to Contractors nominated by them.

This PTS is intended for use primarily in exploration and production applications but may also be applied, where appropriate, in oil refineries, chemical plants, gas plants and supply/marketing installations.

If national and/or local regulations exist in which some of the requirements may be more stringent than in this PTS, the Contractor shall determine by careful scrutiny which of the requirements are the more stringent and which combination of requirements will be acceptable as regards safety, environmental, economic and legal aspects. In all cases the Contractor shall inform the Principal of any deviation from the requirements of this document which is considered to be necessary in order to comply with national and/or local regulations. The Principal may then negotiate with the Authorities concerned with the object of obtaining agreement to follow this PTS as closely as possible.

1.3 DEFINITIONS

1.3.1 General definitions

The **Contractor** is the party which carries out all or part of the design, engineering, procurement, construction, commissioning or management of a project, or operation or maintenance of a facility. The Principal may undertake all or part of the duties of the Contractor.

The **Manufacturer/Supplier** is the party which manufactures or supplies equipment and services to perform the duties specified by the Contractor.

The **Principal** is the party which initiates the project and ultimately pays for its design and construction. The Principal will generally specify the technical requirements. The Principal may also include an agent or consultant authorised to act for, or on behalf of the Principal.

The word **shall** indicate a requirement.

The word **should** indicate a recommendation.

1.3.2 Specific definitions

Concrete coating	A concentric circular and uniform reinforced concrete jacket, continuous or formed in sections, along the exterior pipe surface and having specified characteristics.
Compression (or extrusion) coating	Application of concrete under compression. Compression is attained in two ways: by controlling the space between the rotating pipe and conveyor belt and by applying an outer wrap under tension. This method of application is sometimes referred to as extrusion coating.
Impingement coating	Application of concrete by a mechanical or pneumatic process of propelling or projecting concrete at high velocity against the pipe surface in order to produce a hard, tight adherent coating.
Scope of Work	The section of the coating contract which describes the scope of work relating to the concrete coating of linepipe.

1.4 ACTION ITEMS

Where the Principal is required to make a decision or give a particular design value of a parameter, this is shown by the use of a (P) in the margin.

NOTE: A summary checklist of these and other relevant items is given in (13). Where the Principal's approval is only required under certain circumstances, this is not shown by a margin marker.

Where the Contractor is required to obtain the Principal's approval for a particular action or procedure, this is shown by the use of a (C) in the margin. All such approvals shall be obtained prior to implementing the action or procedure.

NOTE: It is intended that most, if not all, of these approvals would be part of the qualification testing which is required prior to the start of full concrete production. Details of the requirements for procedure specifications, qualification testing and a summary listing of approvals are given in (11). It is assumed that the Contractor's quality systems and procedural details will have been screened prior to contract award and that the referenced approvals merely need finalizing and formalizing.

1.5 CROSS-REFERENCES

Where cross-references to other parts of this PTS are made, the referenced section number is shown in brackets. Other documents referenced by this PTS are listed in (15).

2. MATERIALS

2.1 LINEPIPE

The Contractor shall unload, receive and store either bare or anti-corrosion coated pipe (or both).

2.1.1 Unloading/receipt of linepipe

- (C) The Contractor shall unload all pipes using slings, spreader bars and protected lifting hooks which have current test and insurance certificates. The equipment shall be proposed by the Contractor for approval by the Principal.
- (P) A pipe tally shall be made at the time of offloading and stacking; recording mill number, pipe length, pipe weight, heat number, contract number, steel grade and any further information that the Principal considers to be relevant or required.
- (P) The Principal shall provide the Contractor with a copy of the pipe specification and anti-corrosion coating specification (if applicable), against which the Contractor shall inspect each pipe at the time of receipt. Inspection shall consist of visual inspection of outer and inner pipe surfaces for mechanical and coating damage (if applicable), the end bevels for mechanical damage or manufacturing defects, and pipe end ovality.

Any such damage or defects noted shall be recorded by the Contractor and reported in writing to the Principal within three working days. Any damaged area noted shall be marked on the pipe surface using marking material compatible with the proposed coating system(s).

Pipes that are out of specification or have an identification anomaly shall be clearly marked with the word "HOLD" on the outer surface of the pipe and shall be stored separately.

Any damage to pipes after receipt by the Contractor shall be brought to the attention of the Principal within three working days. The Principal shall instruct the Contractor on the method to be used by the Contractor to correct the damage.

2.1.2 Handling and storage of linepipe

The Contractor shall stockpile all pipes received at the Contractor's coating yard. Pipes shall be handled and stockpiled in such a manner as to prevent damage to pipe or coating. For safety reasons, the pipe shall not be stacked more than 4 m high. The Contractor shall store the pipes by laying them out on prepared sand rows or on timber covered with non-metallic soft material. Sand rows shall be kept clean and clear of vegetation, large and injurious aggregates, or any other deleterious substances. For long-term storage (in excess of 2 months), sand rows shall have a covering of polyethylene sheeting.

The bottom layer of pipes, as a minimum, shall be secured with wedges or clips to prevent collapse of the stockpile.

- (C) The Contractor shall submit a description of the stockpiling and storing method, which shall require the approval of the Principal.

2.2 CEMENT

All cement used for the preparation of the concrete coating shall be ordinary Portland, conforming to ASTM C 150, type II, *BS EN 197-1* or *MS 522*. Cement held in storage for longer than 3 months shall be tested in accordance with these standards, prior to use.

The alkali content shall be less than 0.6 percent. The Tri-calcium Aluminate (C_3A) content shall be less than 8% to prevent a chemical reaction between the concrete and seawater.

All cement shall be stored in covered areas in accordance with the Manufacturer/Supplier instructions.

Cement that has hardened, partially hardened or become lumpy shall not be used.

Test certificates from the cement Manufacturer/Supplier shall be supplied for every cement delivery to the coating yard site. If no alkali percentage is stated on the certificate an additional laboratory test shall be carried out.

The use of Portland blast furnace cement to ASTM C 595 or BS EN 197-4 shall only be permitted when the ambient temperature is higher than 20 °C and shall have Principal's approval.

2.3 SAND/AGGREGATES

Sand shall be well graded from fine to coarse and shall consist of a silica type sand. Clayey and schistose sands shall not be used.

Example:

When tested by means of sieve sizes as governed by BS EN 933-1, sand shall conform to the following requirements:

Sieve size	%Passing (by weight)
1/4 inch	100
N° 16	20-85
N° 50	10-30
N° 100	2-10

The aggregate shall be crushed granite, or any other aggregate approved by the Principal. Where higher density concrete is required to achieve the required submerged weight a portion or all of the aggregate shall be made up from iron ore or other heavy aggregate. Aggregate shall conform to ASTM C 33 or BS EN 12620, with the exception of grading.

For local sand and aggregate, Contractor shall demonstrate the capability of local aggregate in meeting the entire test on concrete required in the specification.

- (C) The aggregate grading envelope shall be proposed by the Contractor and shall have the Principal's approval.

Sand/aggregate shall be washed and shall be clean and free from injurious amounts of salts, alkali, organic impurities or deleterious substances such as oxides of lead and zinc that may affect the strength of the concrete. Sampling and testing shall be carried out in accordance with ASTM C 33 or BS EN 12620.

During production, aggregate cleanliness and grading shall be checked at least once every three days and each new consignment shall likewise be checked in accordance with BS EN 933-1 or equivalent standard.

Example:

Aggregate shall be composed of the following sieve sizes as governed by BS EN 933-1:

Sieve size	%Passing (by weight)
3/8 inch	100
N°4	10-30
N°8	0-10

The ore shall be crushed or graded to the following sieve sizes as governed by BS EN 933-1:

Sieve size	%Passing (by weight)
3/8 inch	100
N°4	95-100
N°16	45-80
N°50	10-30
N°100	2-10

Suitable provisions shall be made to prevent contamination of the aggregate with soil or any foreign matter.

Different types of aggregate shall be stored separately in bins or well prepared areas, i.e. cobbled, paved or well compacted areas allowing adequate drainage of materials.

2.4 WATER

Water used in concrete shall comply with *BS EN 1008* Appendix A. At the Principal's discretion the water shall be tested in accordance with *BS EN 1008* to demonstrate compliance. *Water shall be of potable quality and obtained from a public supply where possible. Water shall not be taken from a spring, well, river, lake or similar source unless tests indicate its suitability.*

2.5 ADDITIVES

Additives containing chlorides shall not be used in the concrete mix. The total quantity of chloride within the concrete mix, calculated as free CaCl_2 , shall not exceed 0.4% of the weight of the cement.

Water reducing agents for concrete may be used in the concrete mix.

Air entraining agents shall not be used in the concrete mix.

2.6 REINFORCEMENT STEEL

2.6.1 General (see Figure 1)

Steel reinforcement shall be provided to limit spalling and control cracking of the concrete. The minimum circumferential reinforcement shall be 0.5 percent of the longitudinal cross-sectional area of the concrete coating. The minimum longitudinal reinforcement shall be 0.05 percent of the transverse cross-sectional area of the concrete coating.

(P) The reinforcement provided shall be either the steel welded wire fabric type or cage type. The Principal shall specify, in the Scope of Work, the type of reinforcement to be used.

NOTE: The use of galvanized steel poultry netting or chicken wire (e.g. to ASTM A 390) is generally not recommended. However, it may be used in certain applications, such as small river crossings on land lines, where external forces on the concrete would be minimal.

2.6.2 Steel welded wire fabric

The steel welded wire fabric shall be galvanised. The chemical and physical properties shall conform to ASTM A 82, ASTM A 185, ASTM A 641 or *BS 4483*.

The minimum diameter of the reinforcing wire should be 1.6 mm.

Nominal pipe diameter	Size
up to and including 8"	1.6 mm woven wire mesh 37 mm hexagonal
10"-24"	2.0 mm welded wire mesh 25x50 mm OR 1.8 mm woven wire mesh 37 mm hexagonal.

26"-36"	2.4 mm welded wire mesh 25x50 mm OR 2.0 mm woven wire mesh 37 mm hexagonal.

2.6.3 Cage type (see Figure 2)

The reinforcement shall be in the form of spirally wound cages having a continuous hoop wire with a number of straight longitudinal bars evenly spaced around the spiral and welded at each wire intersection. Alternatively, the continuous hoop wire may be replaced by single circumferential hoops. The material used shall be hard drawn wire to BS 4482 or ASTM A 615M (deformed), or to a Principal-approved equivalent standard. The welding of the materials shall result in a steel fabric in accordance with BS 4483 or ASTM A 185.

The diameter of the circumferential and longitudinal bars shall be calculated from the required percentage of reinforcing, with a minimum diameter of 3 mm.

- (C) The Contractor shall propose the welding procedure in accordance with a National/ International code or standard to be approved by the Principal. The procedure shall be qualified prior to use.

The Contractor shall carry out shear testing of one weld each week in accordance with BS 4483 or ASTM A 185. The welds at intersections of the cage shall have minimum shear strength as specified in BS 4483 or ASTM A 185.

The spacing of the longitudinal bars shall be between 50 and 250 mm but not less than four longitudinal bars (at approximately equal spacing) shall be provided. The circumferential hoop spacing shall be not more than 100 mm. Cages shall have two hoops spaced 50 mm apart at each pipe end and adjacent to anodes and arrestors, *for manual application*.

For automated process, the pitch of the hoop wires shall not exceed 100 mm and cages shall trimmed and terminate at 20-30mm from concrete cutback and anode ends.

NOTE: 'Close fitting' arrestors may be designed to have the concrete around them, in which case this requirement is not applicable.

3. EQUIPMENT

The Contractor shall use suitable equipment capable of applying concrete coating in accordance with this PTS.

The Contractor's equipment shall provide for the batching of materials by weight. Scales accurate to within 1.5% shall be used (if other than pre-weighed sacked material is used). Such scales shall be calibrated weekly using weights which have an accuracy of 0.3% or better. Each batch shall be weighed separately and mixed in a turn-drum-type mixer, or other batch-type mixer that will ensure a thorough mixing of all materials in the batch. The concrete batching plant shall be in accordance with BS 1305 and shall be performance-tested, at the discretion of the Principal, in accordance with BS 3963.

Alternative systems such as continuous concrete mixing and recycling shall be subject to the Principal's approval.

Water shall be supplied from a measuring tank so set that it discharges into the mixer only the quantity required for the concrete to meet the specification, to an accuracy of 1.5% of the specified quantity.

- (C) Weighing equipment for the determination of the submerged weight of each pipe shall be certified by an independent third party proposed by the Contractor and approved by the Principal. The equipment shall be accurate to within 0.5% or better. Calibration shall be carried out at the beginning of each working shift, using weights which have an accuracy of 0.1% or better.

4. COATING PROCESS

4.1 COATING PROCEDURE SPECIFICATION

(C) The Contractor shall prepare, and submit to the Principal for approval, a minimum of 1 month before commencement of the work, a detailed coating procedure specification containing, but not limited to, the following:

- the Contractor-supplied materials: specifications, type, supplier, methods of control, etc.;
- concrete coating procedures covering the concrete mix, placement of steel reinforcement, concrete application, curing, repair procedures, coating equipment and facilities and identifying the ranges of parameters to be used;
- anode installation, if applicable;
- crack/buckle arrestor installation, if applicable;
- inspection and testing (including procedures and pro-formas); and
- proposed schedule for qualification testing, as defined below.

4.2 COATING PROCEDURE QUALIFICATION TESTING

Prior to the start of full production, the Contractor shall carry out procedure qualification testing to prove to the Principal that the plant, materials, equipment and procedures result in an end product conforming to this PTS. Qualification testing, witnessed by Principal, shall be carried out on the following activities:

- coating of 5 pipes;
- installation of at least 1 anode (if applicable), including 3 thermit welds;
- coating of 1 pipe with an anode (if applicable);
- repairs to small and large areas, including core hole repairs.

The full range of inspections and tests detailed in this PTS shall be applied to each of the above activities or end products.

(C) The Contractor shall issue, for approval by the Principal, a detailed report of the operational parameter ranges, test results and certificates for all materials used for qualification testing.

After successful qualification, operational parameters or material specifications shall not be changed without Principal's prior approval. Such approval may require further qualification tests.

The Contractor may propose to commence full production prior to completion of all testing and receipt of the Principal's approval of the qualification testing. This may be allowed, at the Principal's discretion, but at the Contractor's risk of product failure and rejection leading to subsequent rework.

4.3 PROPORTIONING OF MATERIALS

The Contractor will be permitted to select any proportioning of materials to produce concrete meeting the requirements of this PTS. The suitability of the Contractor's concrete mix design shall be proven as part of the pre-qualification testing (4.2). Approved concrete mix designs shall not be changed without re-testing and approval by the Principal. Concrete mix designs submitted to the Principal for approval shall at least contain the following information:

(C)

- the proportions and weights of the component materials used for the mix;
- the water/cement ratio (not to exceed 0.45 by weight);
- *the grading of the aggregates accompanied by appropriate curves;*
- *the test results of the mix for strength, density and water absorption;*
- *the measures taken to minimise drying shrinkage.*

4.4 APPLICATION OF CONCRETE COATING

4.4.1 Pre-checks

- (C) The Contractor shall visually inspect each pipe for damage. The anti-corrosion coating shall be checked to ensure it is clean and free from dirt or other foreign matter. Any dirt or foreign matter shall be removed from the surface of the anti-corrosion coating and the coating of all pipes shall be 100% electrically inspected using a holiday detector. The type and voltage setting of the holiday detector, which will end on the anti-corrosion coating specification, shall be proposed by the Contractor and approved by the Principal.
- (P)

The testing shall take place just prior to the fitting of the reinforcement steel and prior to the attachment of anodes or buckle/crack arrestors. Any pipes containing pipe or coating defects shall be put aside or repaired in accordance with approved repair procedures before the fitting of reinforcing steel, anodes or arrestors.

Special care shall be taken with pipes to which sacrificial anodes and/or buckle/crack arrestors have been fitted. Anode attachment and cable-to-pipe connectors shall be inspected to ensure that they are secure and are properly coated with an anti-corrosion coating determined by the use of the holiday detector.

4.4.2 Fitting of reinforcement steel

4.4.2.1 General

The minimum distance between the reinforcement and the anti-corrosion coating shall be 10 mm *except for 25 mm concrete thickness (for 25mm, 8mm spacer is sufficient)*. Contacts shall not be made with anodes and/or buckle/crack arrestors, and if the reinforcing passes over arrestors the minimum gap shall be 10 mm.

When more than one layer of reinforcing is used there shall be a minimum spacing of 10 mm between layers.

Reinforcing shall terminate 20 mm (± 5 mm) from the end of the concrete coating and adjacent to anodes. There shall be no electrical contact between reinforcing and pipe or between reinforcing and anodes.

The reinforcement shall be free of loose rust, oil, grease, dirt or other deleterious matter.

4.4.2.2 Steel welded wire fabric type

Reinforcement steel may be applied by any method that will provide continuity of reinforcing. The longitudinal overlap shall be at least 30 mm.

For concrete thickness up to 50 mm, one wrap of reinforcing shall be used. For thicknesses of more than 50 mm, two layers should be considered. Additional layers may be necessary for concrete thicknesses in excess of 120 mm, but this would then require further Principal's approval.

The reinforcement shall be positioned at least 10 mm below the outer concrete surface.

4.4.2.3 Cage type

The reinforcement shall be positioned within the middle third of the concrete coating with a concrete cover of at least 10 mm

- (C) Cages shall be rigidly held concentric to the pipe at the correct location by electrically insulating plastic, synthetic resin or concrete spacers. The type of spacer shall be proposed by the Contractor for approval by the Principal. Spacers shall have flush *bases (minimum flat base area of 15 X 15 mm)* to prevent indentation into the anti-corrosion coating.

Where a lap is required, one part cage shall have its longitudinal wires extended to ensure a minimum overlap of 200 mm with the longitudinal wires of the other cage and with the circumferential wires of each cage having not less than 25 mm between them. Lap wires shall be bent down as necessary to maintain alignment.

4.4.3 Application of concrete

4.4.3.1 General

The concrete shall be applied to the pipe by either the impingement or the compression method. The application method shall ensure that the concrete coating satisfies the minimum requirements of this PTS for the following:

- Concrete coating sizing and shaping;
- Concrete coating specific gravity;
- Concrete coated pipe submerged weight;
- Concrete coating compressive strength;
- Concrete coating water absorption; and
- Emplacement of steel reinforcement.

Each pipe shall be coated in a continuous operation in such a manner that the thickness of coating is applied uniformly, smoothly, without corrugations and concentric with the steel pipe throughout the total coated length of the pipe.

For pipe joints containing anodes, the outer surface of each anode (with the exception of the ends) shall be kept free of concrete.

Each concrete coated pipe shall be weighed immediately after the coating operation and its submerged weight established and recorded.

4.4.3.2 Time limitations

The concrete shall be placed on the pipe within 30 minutes *starting from* the water being first added to the mix.

If more than one application is required to produce a coating of the specified thickness, then the time allowed between the first coat and the second coat shall not exceed 30 minutes. If a period exceeding 30 minutes does occur, the coating shall be removed and the entire pipe shall be re-coated.

4.4.3.3 Temperature limitations

Concrete coating shall not be carried out when there is evidence of flash setting of concrete.

In the event that the ambient temperature falls below 4 °C the Contractor may request to use a 'Winter Concrete Application' procedure. Prior to use, this procedure shall be qualified by the Contractor in the manner specified by the Principal.

4.4.3.4 Recycled rebound materials

The use of recycled rebound material is allowed providing it can be demonstrated that there is no detrimental effect to the final concrete product. Secondary mixing of the freshly batched concrete with the recycled material shall follow immediately and shall produce a homogeneous cohesive mixture. The amount of recycled material used shall not exceed 10% of the total mix by weight. When breaks in the operation for whatever reason exceed thirty minutes then the recycled material not previously added to a mix shall be discarded and removed from the coating area.

4.4.3.5 End cutback and tolerance

- (P) Both ends of each pipe shall remain uncoated. The length of this "cut back" i.e. uncoated section shall be as specified in the Scope of Work with a tolerance of +/- 15 mm. The
- (P) concrete shall be terminated either square or tapered back at an angle to the pipe surface as specified in the Scope of Work.

- (P) *If is not specified in the Scope of Work, the concrete shall be terminated 350 mm +/- 15mm from each end of the pipe and 50 mm from the ends of the anti-corrosion coating. Design engineer also needs to verify the coating cutback length with welding Contractor. Concrete coating will extend to the sides of the anodes and if necessary be bevelled down*

to the anode thickness at an angle of 30°.

4.4.3.6 Finishing

The inside and the cut back at both ends of each pipe (i.e. the bare pipe and the anti-corrosion coating) shall be completely free of concrete or any other foreign matter. Any concrete present on these surfaces after completion of concrete coating shall be fully removed before setting.

Surface fall-outs shall be filled by guniting. The repair mix shall be similar in composition to the original mix. The repair shall be carried out in accordance with approved procedures within 30 minutes after concrete application.

If the surface fall outs when the concrete coating is still at the green state i.e. within 30 minutes after concrete application, the pipes will be re-spray immediately.

If the total area of fall-outs is more than 20% of the concrete surface, the pipe joint shall be stripped and re-coated.

4.5 CURING

4.5.1 General

Immediately after completion of the concrete application, the pipe shall be removed from the coating machine and transferred, after weighing and diameter measurements, to the storage yard for curing. The coated pipe shall be gently lifted and transported to the curing yard and placed, so as to prevent cracking or damage to the concrete, in a single layer.

Curing shall be performed either by using water curing, steam curing, curing by sealing compounds, polyethylene wrapping or *fog curing*. The method used shall be suitable for the specific weather and temperature conditions at the coating location. The exposed surfaces of the concrete shall be protected during curing from any adverse effects of sunshine, drying winds, rain or running water.

The curing process shall continue until a minimum compressive strength of 14 MPa has been achieved (as demonstrated by the qualification tests and/or subsequent core tests), after which the pipe can be lifted, transported or stacked.

- (C) The curing facilities and curing procedure shall be proposed by the Contractor for approval by the Principal.

4.5.2 Water curing

Water curing shall consist of wetting and moistening the concrete coating, starting not later than 6 hours after completion of concrete application.

The concrete coating shall be kept continuously moist by intermittent spraying for a period of at least 7 days. The interval between spraying shall not be more than 24 hours. At temperatures below 4 °C, suitable precautions shall be taken to prevent damage due to freezing.

4.5.3 Steam curing

If the curing process involves steam or warm high-humidity air, then it shall be demonstrated that the process will have no deleterious effects on the concrete. Under no circumstances shall the pipe wall be allowed to reach a temperature that would cause any damage to the anti-corrosion coating (60 °C, or as advised otherwise by the Principal).

Curing by steam shall not start sooner than 3 hours after concrete application completion.

Concrete coated pipes shall be enclosed in plastic or a similar cover suitable to maintain steam circulation. Steam circulation shall start at ambient temperature and shall be controlled to give a temperature gradient of approximately 10 °C/hour up to a maximum steel/coating temperature of 60 °C.

The pipes shall be held under steam curing for at least 6 hours and then allowed to cool for a similar period. The Contractor shall demonstrate by pre-qualification that the curing time used is sufficient to meet the specified concrete strength levels.

4.5.4 Curing by sealing compounds (membrane)

Sealing compounds shall meet requirements of ASTM C 309. The material shall be stored, prepared and applied in strict conformity with the printed instructions supplied by the compound Manufacturer/Supplier. The compound shall be non-toxic and non-flammable and shall not react with any constituent of the concrete, reinforcement, anodes, protective coating or pipe steel.

Unless otherwise specified by the compound Manufacturer/Supplier's instructions, membrane sealing compounds shall be sprayed over the complete concrete surface within 6 hours after completion of the concrete application and shall remain for a minimum of 7 days. The materials shall not be applied at a temperature of less than 4 °C.

Sealing compound shall not be sprayed on any part of the anode surface.

4.5.5 Curing under polyethylene wrapping

Wrapping in plastic film (e.g. polyethylene film) shall be done by mechanical apparatus immediately after the coating is applied to the pipe and preferably before the pipe is removed from the concrete coating apparatus. A light spray of water shall be applied before applying the plastic film. The film shall have a minimum thickness of 0.1 mm and overlap of the sheet shall not be less than 25% of the sheet width. Polyethylene film shall be in accordance with ASTM C 171.

The interface between the concrete and the bare steel at the pipe ends shall be wrapped to achieve an air-tight seal.

The polyethylene wrapping shall be removed prior to load-out of pipe.

4.5.6 Fog Curing

Fresh concrete coating is continuously moistened by mist released from fogging tips and covered with tarpaulin sheets to provide a 'closed' environment for curing.

'Atomized' mist, with high 'wet-ability' is introduced gradually building to a 'closed' high humidity, near saturation ambience to facilitate proper curing environment. The continuous introduction of 'atomized' fog/mist into tarpaulin shall be continued for one shift before the pipe is removed/ subject to further handling.

4.5.7 Handling after application of coating

The Contractor shall take precautions to prevent detrimental movement of the line pipe after coating and to minimise handling stresses whilst the concrete coating is hardening and curing.

5. INSPECTION AND TESTING

5.1 GENERAL

- (P) The Principal shall specify if, and to what extent, he will monitor the Contractor's procedure qualification, production, quality control and inspection.

The Contractor shall provide experienced and qualified inspection personnel as required to ensure compliance with this PTS.

- (C) The Contractor shall submit details of all sampling and testing procedures for Principal's approval.

- (C) Strength, density and water absorption tests shall be carried out by a third party proposed by the Contractor and approved by the Principal, unless the Contractor's own facilities and procedures are accepted by the Principal.

A proper lighting system shall be provided in all covered areas. Minimum light intensities required shall be as follows:

- a) Generally 300 LUX*
- b) Surface Inspection Area 500 LUX*

5.2 MISCELLANEOUS INSPECTIONS/TESTS

5.2.1 Steel reinforcement check

When steel wire fabric reinforcement is used, at least 2 pipes per shift shall be selected at random for checking that the distribution of the reinforcement is as specified in (4.4.2). The method of checking shall be to remove a small area of concrete coating (200 mm long x 100 mm wide) by means of a high-pressure water jet. Any pipe inspected and found satisfactory shall be reinstated in accordance with (6).

An electrical resistance check shall be made between the pipe and the (inner) reinforcement on at least 2 pipes *and 2 anodes pipes* per shift. This shall be carried out in the period between concrete application and curing, using an ohmmeter. The resistance shall be at least 1000 ohms.

Pipes with unsatisfactory distribution of reinforcement, or which fail the electrical resistance test, shall be stripped and re-coated after the reinforcement has been correctly installed. In this event, three additional pipes from the same batch shall also be checked to gain acceptance of the batch.

5.2.2 Diameter measurements

The diameter measurements immediately after concrete coating application shall satisfy the following two requirements:

- (i) The radial distance between any high and low points of the coating surface shall not exceed 8 mm in any 500 mm length, nor 5 mm in the last 1 m length at each end.
 - (ii) The diameter of each coated pipe shall be measured either continuously by automatic measuring device, or by using a girth tape in six positions spaced at approximately equal intervals with the two end measurements being approximately 600 mm from the ends of the concrete coating. All diameter measurements shall be recorded and the mean value per pipe shall be used to calculate the mean concrete thickness. The concrete thickness and acceptance tolerance shall be as stated in the Scope of Work.
- (P)

Coated pipes outside the stated tolerances shall be repaired or stripped and re-coated, at the discretion of the Principal.

5.2.3 Visual inspection

5.2.3.1 General

All concrete-coated pipes shall be visually inspected and examined for damage, cracks, voids or other defects. There shall be no steel reinforcement, including sharp or cut wire-ends, protruding from the concrete or visible at any part of the coating surface.

All cores removed for strength testing (5.3) shall be visually examined for voids and other defects.

Pipe ends shall be checked to ensure that the required cut back distances and end bevels are free of coating. The anode surface must be free of concrete splatter.

5.2.3.2 Cracking

Circumferential surface cracking of the concrete, with a crack width less than 5 mm, shall not be considered a defect.

Longitudinal surface cracks of any width and less than 250 mm in length shall not be considered defects, but holes of 10 mm nominal diameter shall be drilled at the crack tips to prevent crack propagation. The bottom of these holes shall be 7-10 mm from the anti-corrosion coating. Longitudinal cracks in excess of 1000 mm in length or extending the full depth of the coating are not acceptable and coating with such a crack shall be removed from the entire length of the pipe. Longitudinal cracks with a length between 250 mm and 1000 mm shall be repaired in accordance with (6.3).

Circumferential annular cracking visible at pipe ends is not acceptable. Any such cracking shall be reason to consider the concrete suspect and liable to rejection. An investigation shall be made, including a back check of pipe produced prior to and following the suspect pipe. The Contractor shall destructively test any concrete coating with annular cracking of the concrete. This testing shall take the form of saw cutting and removal of sections of the concrete from the pipe to determine whether the concrete is a homogeneous mass throughout the length of the pipe.

5.2.3.3 Damage

Surface damage will not be considered a defect if:

- (i) the total surface area of damage per pipe is less than 0.1 m², and
- (ii) the maximum depth does not exceed 20% of the coating thickness, and
- (iii) the remaining concrete is sound.

Damage at the ends of the concrete coating need not be repaired provided that the damaged area is less than one third of the circumference for a length less than 200 mm.

5.3 STRENGTH AND DENSITY TESTING

The compressive strength and density of the applied concrete after 7 and 28 days shall be determined by two different methods of testing:

- (i) taking of test cubes from the transfer belt between the concrete batching plant and the application machine (or from the mixer outlet for continuous mixing equipment);
- (ii) taking of core samples from the actual concrete coating on the pipes.

Acceptance shall be based only on 28-day core sample strength results.

5.3.1 Test cubes

The cubes shall be taken at a frequency of one sample for every 25 pipe joints coated, up to a maximum of three times per work shift. A minimum of 4 cubes (100 x 100 x 100 mm) from each sample shall be taken. Two cubes shall be tested at 7 days age and the remaining cubes at 28 days age. The test cubes shall be *made, cured and tested* according to BS EN 12390-2 and BS EN 12390-3, or ASTM C 39. The test cubes shall be tested for density and compressive strength, to indicate the consistency of the concrete. *The minimum compressive strength shall be expressed as equivalent core strength.*

5.3.2 Core samples

The core sampling frequency shall be 2 sets of 3 core specimens from one pipe for every 15 pipes coated. The cores shall be sampled at equidistant points along each pipe.

Cores shall be removed from pipes after 4 days curing for 7 days testing and after 25 days curing for 28 days testing.

Samples shall be obtained using a diamond cutter set to ensure that the cut is perpendicular to the pipe surface and fitted with a positive depth-of-cut limit stop to ensure that the core barrel cannot penetrate closer than 7 mm to the anti-corrosion coat of the pipe joint. Cores shall be taken so as not to cut through the steel reinforcing cage if this type of reinforcement is applied.

The diameter of the core shall be between 35 mm and 44 mm. A single core diameter shall be used throughout the coating operation. The height to diameter ratio of the core when

trimmed for testing shall be 1.00. For coatings less than approximately 45 mm thick, where a height to diameter ratio of 1.00 is not possible, strength testing shall be performed either with cubes or with alternative cores, at the Principal's discretion. In either case a correlation shall be made with previous results from identical mix designs or from qualification pipes coated with at least 45 mm thick concrete, at the Principal's discretion.

Sampling, storing and testing of the core and calculation of the test results shall be in accordance with the provisions of *BS EN 12504-1*, *ASTM C 42* or *ASTM C 39*.

One set of core specimens shall be tested at 7 days age and the second set at 28 days age.

The results from the 7-day tests shall be used to give advance warning of any variations in the concrete strength. The 28-day tests shall be the basis for acceptance, as detailed below. For repairs of core holes, see (6.4).

5.3.3 Acceptance criteria (28-day core tests)

	Compressive Strength (MPa)		
	Grade AA	Grade A	Grade B
Minimum value for individual core	43	33	23
Minimum mean value of 3 cores	45	35	25

If an individual core has a strength less than the specified minimum, one further core shall be taken from the same pipe. This additional test result may then be used to calculate the 3-core mean. If the additional test value is below the specified individual minimum then the coating from the particular pipe shall be rejected and a further pipe shall be tested.

If the mean strength value from 3 acceptable individual cores from a particular pipe is less than the specified minimum mean, the coating from that pipe shall be rejected and two further pipes shall be tested.

If the mean value of the results of all the core tests over a shift falls below the 3-core mean then the Contractor shall either reject all coating or test the coating from each individual pipe from that shift.

The Contractor shall also carry out an analysis of cube and core test results on a "25-result basis", for both 7 and 28-day results. The analysis shall be carried out by using the first 25 results available for the first analysis and thereafter on a "5 on - 5 off" basis or "day-on-day" basis whichever is more appropriate. The Coefficient of Variation of the strength values within the 25-result analysis shall not exceed 15 percent of the mean compressive strength of that group of results.

NOTE: For each group of results, the Coefficient of Variation is equal to the Standard Deviation divided by the Mean.

Failure to meet the Coefficient of Variation criterion shall result in the shift's production being held suspect and subject to further testing, as decided by the Principal.

5.4 DETERMINATION OF SUBMERGED WEIGHT

The unsaturated (as applied) submerged weight per metre for each pipe shall be calculated from the pipe weight in air immediately after coating. The submerged weight, $W_{\text{Submerged}}$ (N/linear metre), shall be calculated using the following formula:

$$W_{\text{Submerged}} = \frac{W - 2cw - B}{L - 2c}$$

where: W = total weight of concrete coated pipe in air (N)

B = buoyancy of pipe (as defined below) (N)

(P) L = length of pipe (m)

(P) w = unit weight of bare steel pipe (N/m), to be specified by the Principal (2.1.1)

c = length of concrete cutback (m), to be specified by the Principal

The buoyancy of the pipe, B (N), is given by:

$$B = \frac{\pi}{4} \times \rho \times \left(\frac{D}{1000} \right)^2 \times (L - 2c) \times g$$

where: D = outside diameter of concrete (mm), average of 6 measurements

ρ = density of the displaced water (kg/m³)

g = gravitational acceleration (m/s²)

- (P) For anode and crack arrestor pipes the specified maximum submerged weight may be exceeded. Variations in buoyancy shall be ignored and the submerged weight value shall be adjusted by using an increased weight in air. The Principal shall specify the allowable weight variations in the Scope of Work.

- (P) The results shall be recorded and tabulated against pipe number and presented to the Principal at the completion of each day's production. The submerged weight of each coated pipe shall be within the acceptance tolerances stated by the Principal in the Scope of Work. Test results shall be analysed on a "25-result basis" as described above for strength testing. However, the analysis shall commence by using results of the first 25 pipes and, from then on, each pipe coated shall be added to the list and the first pipe on the list deducted, thereby retaining a 25-joint total at all times for submerged weight analysis.

If a pipe requires scraping or additional concrete to control or adjust its weight, the minimum specified cover shall remain over the reinforcement and any additional concrete shall be applied within 30 minutes of the first concrete application.

Any pipes that are rejected for being outside the submerged weight tolerances shall have all concrete coating removed.

5.5 WATER ABSORPTION TEST

During the first 3 days' production at least one pipe per day shall be selected for a full-scale immersion test. The submerged weight shall be measured every 8 hours and registered until there is no significant change. The test pipes shall be taken after 4 days of curing, with a minimum period of immersion of 24 hours.

The water absorption of the concrete shall be determined at least once per production shift by taking samples of freshly applied concrete from the pipe ends.

The test method shall be as follows:

- remove the sample (at least 500 grams) from the pipe and transfer *as soon as the concrete is hardened* to the laboratory;
- brush the sample with a fine bristle brush to remove all loose particles from the sample surface;
- weigh sample (weight X);
- transfer sample to pipe curing cells and allow to cure for the same period of time as the coated pipe;
- immerse the sample in sea water tank at 21 °C for at least 24 hours but in any event until the weight has stabilised to within 1% of the mean of 3 successive weighings (at minimum intervals of 3 hours). Record sample weight (weight Y). All weighing shall be made after towel-drying the sample;

- f) calculate the water absorption (%) = $\frac{Y - X}{X} \cdot 100$

The increase in weight of concrete due to water absorption shall not be greater than 6% for Grade AA, A and B. Water absorption exceeding these values shall result in rejection of all coated pipes represented by the test.

5.6 IMPACT TESTING

5.6.1 General

Impact testing may be required to demonstrate suitability for use in offshore applications where fishing activities occur.

- (P) When specified by the Principal in the Scope of Work, impact testing shall be carried out in accordance with the following details.

Impact testing shall be carried out on qualification test pipes selected by the Principal and on one concrete coated pipe per week or at the Principal's discretion until the Principal is satisfied that the concrete coating procedures produce a consistent product with acceptable impact resistance.

- (C) The impact testing equipment and procedure are detailed below. The exact details of the test rig shall be submitted to the Principal for approval and shall include details of safety measures to be taken to avoid injury to personnel.

Pipes subject to impact testing shall be scrapped and not repaired or incorporated in the pipeline.

5.6.2 Impact test rig

The impact test rig is designed to simulate impact by the trawl beam shoes of typical fishing trawl equipment as used in e.g. the North Sea.

It shall consist of a steel framework on which a heavy cylindrical impact 'hammer' is suspended. The hammer shall be supported in the horizontal position by two sets of wire ropes attached to the supporting framework.

The impact hammer shall be designed to simulate the mass and momentum of a 2.68 tonne trawl board travelling at 7 knots over the seabed. The 'hammer' shall be 300 mm long, have a 10 mm radius tip, and be connected to a plate perpendicular to the pipe axis as shown in (Figure 3). The mass of the hammer shall be 2.68 tonne with the capability of reducing the mass to 1.84 tonne. The vertical drop of the hammer shall be 660 mm giving a velocity on impact of 3.60 m/s (7 knots).

Note: The above-indicated values are based on specific North Sea trawling equipment, for other areas different values may be applicable.

The concrete coated test pipe shall be rigidly supported from the rear over its full length by moist sand. The pipe shall be held rigidly at its ends by wooden cradles and wedges to prevent movement of the pipe under impact.

The point of impact on the concrete shall be at the 3 o'clock position. The pipe shall be supported so that impact of the concrete is made when the hammer is at the lowest point in its swing.

5.6.3 Test procedure

Testing shall be carried out in three ways:

1. 90° to pipe axis at one location (2.68 t)
2. 90° to pipe axis at five locations each 300 mm apart (2.68 t)
3. 60° to pipe axis at one location (1.84 t).

Test 1

The test pipe shall be supported with a minimum of 2 m concrete section either side of the section under test. Impact blows shall be directed on the same location and the condition of the concrete recorded after each blow, until the anti-corrosion coating is exposed.

Test 2

The test pipe or rig shall be moved along at least 2 m and then a single blow shall be directed on five locations, each 300 mm apart. The condition of the concrete shall be recorded after each blow.

Test 3

The test pipe or rig shall be moved along at least another 2 m and the pipe impacted in the 60° position to the line of motion of the hammer. Five impact blows shall be directed on the same location and the condition of the concrete recorded after each blow.

For all tests, recording of impact locations shall include:

- a) photograph after each blow;
- b) diagram(s) of crack patterns and spalled areas including dimensions of major cracks (length and width);
- c) dimensional changes, if any, of the pipe; detected by visual internal inspection and subsequent external measurement.

The concrete area covering crack arrestors shall be impacted during qualification tests, for information purposes.

5.6.4 Acceptance criteria for impact testing

Concrete coating will be considered acceptable when the following conditions are satisfied for 16" diameter pipe and larger with concrete coating thickness of at least 50 mm. For smaller diameter pipes and/or concrete coating having a thickness less than 50 mm, the Principal may modify these acceptance criteria as specified in the Scope of Work.

Test 1

- a) The anti-corrosion coating shall not be visible and the steel pipe wall shall not be indented or damaged after 5 blows.
- b) Spalling shall not occur over an axial distance greater than 300 mm each side of the points of impact, after 5 blows.

Test 2

Any spalling shall not extend from one impact location to another.

Test 3

The anti-corrosion coating shall not be visible after five blows.

6. REPAIRS**6.1 GENERAL**

The Principal may reject concrete-coated pipes when any of the previously stated acceptance criteria are not met, and in such case the coating shall be completely removed rather than partially repaired. Where repairs are permitted in accordance with this PTS, they shall be repaired in accordance with this section.

Concrete used for repairs shall contain the same proportions of dry constituents as the original coating but the water/cement ratio may be higher, to improve workability.

Prior to application of repair material, the defective area shall be thoroughly cleaned by removing concrete coating sufficiently to clean under the reinforcing bars and the concrete edges shall be cut so as to form a holding key. *The underlying anti-corrosion coating shall be examined for damage that may have occurred during concrete removal and tested by holiday*

detector. Any damaged anti-corrosion coating shall be repaired and retested before subsequent re-coating with concrete.

All repairs shall be moist-cured for a minimum period of 48 hours, or until the repaired area has attained a compressive strength of 14 MPa.

- (C) The Contractor shall demonstrate that the procedures for repair application and cure will result in an acceptable coating with the compressive strength of repair being at least equal to the strength of the coating (5.3.3). All repair methods shall be subject to the Principal's approval.

6.2 DAMAGED AREAS

Damaged areas shall be repaired when they are considered defects as defined in (5.2.3.3).

Areas of damage not exceeding 0.8 m² in any 3 m length of pipe (restricted to two such areas in any 12 m length of pipe) may be repaired by hand patching, providing that such repairs are carried out while the concrete is in a 'green' state (i.e. within 4 hours of coating application and prior to curing).

In the event that the Contractor wishes to repair areas on cured concrete, a guniting process shall be used and the procedure shall be approved by the Principal.

Areas where the coating has been damaged during coating application in excess of 0.8 m² but not more than 25% of the total coating area shall be repaired. All such repairs shall be carried out immediately prior to the pipe being removed from the coating applicator, by re-application of concrete to the spalled areas using the application machine used to coat the pipe.

Where damage to concrete is in excess of 25% of the total coating area, repairs shall not be allowed. All concrete coating shall be removed and the pipe re-coated.

- (C) The Contractor shall propose, for Principal's approval, a procedure for removing rejected coating.

6.3 CRACKS

Longitudinal cracks in *excess of 250 mm in length* shall be repaired as specified below with the addition that the ends of each crack shall be drilled with a hole of 10 mm nominal diameter to prevent crack propagation. The bottom of this hole shall be 7 to 10 mm from the anti-corrosion coating.

Repairs to cracks shall be made by chiselling out the crack to a width of at least 25 mm throughout its length. The prepared area shall be undercut to form an adequate key for the repair material. The repair concrete, which shall have a density equal to that originally applied, shall be trowelled or impinged into the prepared area and smoothed down to the level of the original coating. Prior to repairing, the prepared area shall be inspected for damage to the coating or metal surface.

6.4 CORE HOLES/INSPECTION AREAS

- (C) Core holes shall not be refilled without prior inspection. The core holes shall then be hand-filled with a stiff mix similar to that used in the coating process. The Contractor shall propose, for Principal's approval, a detailed procedure for inspection and refilling of core holes and inspection areas.

7. INSTALLATION OF ANODES

- (P) The Principal shall provide design drawings that include anode dimensions and installation details.

7.1 UNLOADING, HANDLING, STORAGE AND CLEANING

Upon receipt, the Contractor shall inspect all anodes for damage and identification markings and produce an anode tally accordingly. Site storage, lifting and handling shall be performed in a manner that does not cause damage to anode material, steel core or electrical connectors.

Anodes may be specified by the Principal to have an internal surface coating. Prior to installation, the Contractor shall ensure that the internal and external surface of each anode half-shell is free from unspecified oils, grease, etc. The anode shall be protected from damage during the concrete coating process.

7.2 INSTALLATION

- Anodes shall be located at pipe mid length. The Contractor shall carefully remove the anti-corrosion coating from the areas designated for the attachment of the bonding leads. These areas shall be at least 150 mm from any seam or girth weld. Anodes shall be fitted tightly over and around the anti-corrosion coating by use of a tension applicator (i.e. 3 ton pull lift chain type) or other Principal-approved method. Once the two halves are correctly aligned, their cages and straps shall be fillet welded together *using low hydrogen SMAW* in accordance with a pre-qualified procedure to a National/International code or standard proposed by the Contractor and approved by the Principal.
- (C)

All galvanising and coating shall be removed for at least 15 mm around the intended weld areas. The fillet welds shall also be continuous around all edges and shall be visually inspected for compliance with the approved code or standard. The anti-corrosion coating shall be protected from an arc being struck on it during welding.

7.3 ELECTRICAL CONNECTIONS

Bracelet anode assemblies should include polyethylene (PE) or polyvinyl chloride (PVC) sheathed multicore cable and doubler plates (50mm x 50mm x 5mm) for anode attachment. The line pipe surface shall be cleaned (remove any corrosion coating) for an area approximately 2 inches by 2 inches and the clean doubler plate shall then be fillet welded to the pipe using qualified welding procedure.

- The bonding leads of the anodes shall be a polyethylene (PE) or polyvinyl chloride (PVC) sheathed multicore cable with a minimum cross-sectional area of 16 mm² and a minimum length of 250 mm. Two bonding leads will be supplied with each anode half, either separate or pre-welded at one end, as specified by the Principal in the Scope of Work. Bent or out-of-round cable ends shall be removed using a proper cable cutter. The Contractor shall remove 25 mm of the PVC insulation at the cable ends. The cable ends shall be clean, dry and free from grease and oil. The cable connection shall be made in an area where no concrete will be applied (in the gap between the two half-shells, if possible). Pipe surface areas shall be clean, to ISO 8501-1, grade St-3, prior to bonding the clean cable ends to the pipe surface by a thermit weld (see NOTE 2.).
- (P)

NOTE: 1. Thermit welding shall not be used on stainless steel pipes.

2. Although this PTS is based on using the thermit welding technique, Contractor may propose, for Principal's approval, an equivalent proven method for the anode cable to pipe weld.

- (C) The welding method and the equipment shall be proposed by the Contractor for approval by the Principal. The weld shall be made using a maximum powder charge of 15 gram.

The Contractor shall pre-heat an area of 150 mm x 50 mm at the position of the intended thermit welds. The pre-heat temperature shall be between 25 °C and 50 °C as measured one minute after the removal of the external heat source and immediately prior to the thermit weld. The Contractor shall ensure that the mould is at a temperature of approximately 50 °C immediately prior to use and of a type with a curved base to match the curvature of the pipe. Between welds, the moulds shall be carefully cleaned. Moulds shall be discarded if they become cracked, chipped or show other signs of damage.

The cable shall be inserted into the mould so that its end is under the centre of the tap hole and in the centre of the weld cavity.

As part of the qualification test, the Contractor shall prove that the welding process fulfils the following requirements in three separate consecutive tests. The pipe selected for these welding tests shall have chemical analysis and mechanical properties typical of those which will be used in production. If several pipes from different steel heats are to be welded then destructive tests shall be made from the pipe having the highest carbon equivalent. The test welds shall be sectioned diametrically (see Figure 4) and specimens shall have polished surfaces.

a) Copper penetration requirements

The fusion line between the copper alloy nugget and the parent metal shall not be more than 1 mm below the original surface of the parent metal. Intergranular penetration of the steel grain boundaries beyond the fusion line shall not exceed 0.5 mm (determined using a magnification of 200).

b) Hardness requirements

The hardness of the weld shall be tested in accordance with ASTM E 92 along 3 lines, 1, 2, and 3 mm below and parallel to the original surface of the parent metal. These lines shall run through the centre of the weld as viewed from above the weld, see (Figure 4). The hardness values shall be taken at 2 mm intervals extending to 10 mm either side of the extreme edges of the weld. The maximum single value hardness shall not exceed 300HV10.

In order to be approved for welding, operators shall have made acceptable thermit weld tests in accordance with a) and b) above.

On completion of all welds, the weld area and any other bare steel areas on the anode cage or straps shall be thoroughly cleaned and, if necessary, degreased. The Contractor shall clean the weld and immediately surrounding material by wire brushing to ISO 8501-1, grade St-3.

- (C) The Contractor shall propose an anti-corrosion coating and application method for approval by the Principal. The Contractor shall coat the prepared surfaces in a manner to suit the type of anti-corrosion coating selected.
- (C) The gap between the anode halves on both sides shall be filled with a material (e.g. *hot asphalt mastic*) that has been proposed by the Contractor and approved by the Principal. The gap shall be filled level with the outer surface of the anode.

Care shall be taken to prevent formation of voids. Where concrete and anodes are of the same thickness the surface shall be finished off flush. The outer surface of the anode shall be kept clean.

7.4 INSPECTION AND TESTING

All fillet welds shall be visually inspected for profile and dimensions for conformance with the design drawings provided by the Principal. Magnetic particle examination or liquid penetrant inspection in accordance with ASTM E 709 or ASTM E 165 shall be performed on the welds of anode straps on at least 2 pipes per shift. The welds shall be ground out and re-welded if a crack or lack of fusion is detected.

The Contractor shall test the connection of all bonding leads by both electrical and mechanical means. The resistance across the weld, measured between the anode and the pipe steel, shall not exceed 0.01 ohms. This shall be measured with a low-resistance ohmmeter employing a battery cell and providing a current of approximately 100 amperes. Mechanical integrity of each lead shall be established visually and by means of a sharp blow from a 1 kg hammer. Any weld not proving satisfactory shall be carefully removed down to the parent metal surface. The re-weld shall be carried out at a new location approved by the Principal.

Following completion of anode installation, the Contractor shall carry out an electrical continuity test on all anode joints to demonstrate electrical isolation of the anode from the concrete reinforcement.

Each completed installation shall be inspected by the Principal prior to moving the pipe from the anode installation area.

8. PIPE IDENTIFICATION

8.1 GENERAL

Each pipe shall be supplied to the Contractor with pipe identification numbers provided by the mill and corresponding with the mill certificates. These mill-allocated pipe numbers shall be used on all tally sheets/documentation, needed for the coating process, and therefore the preservation of these numbers is essential. If linepipe is supplied from different sources, mills, etc., then the relevant lots shall be stored and kept separated at all times.

8.2 MARKING

All concrete-coated pipes shall be colour-coded in order to readily identify the different categories of pipe thickness, coating thickness and attachments. A colour coding scheme shall be specified by the Principal in the Scope of Work. The Contractor shall apply marine paint colour bands near both ends of the concrete coating. The paint shall also be suitable for long-term storage at the designated final delivery location. These bands shall be 50 mm wide starting at 150 mm from each end of the concrete coating. The bands shall be applied immediately after concrete curing.

9. HANDLING, STOCKPILING AND LOADING OUT OF CONCRETE-COATED PIPE

Pipes shall be handled at all times in a suitable manner to avoid damage to pipe, attachments, anti-corrosion coating and concrete coating.

- (C) The Contractor's proposed methods of lifting and handling concrete-coated pipe shall be submitted to the Principal for approval prior to use.

- (C) The Contractor shall clean the end cutback of coated pipes, to remove all concrete spatters and any deleterious material, prior to load-out. The Contractor shall propose a method of cleaning, for approval by the Principal.

The Contractor shall not carry out any repairs to the pipe or coating nor re-bevel the pipe ends unless specifically instructed to do so by the Principal. The procedure for repairs and/or re-bevelling shall be agreed with the Principal prior to any work being carried out.

- (C) Concrete-coated pipe shall be stockpiled at the Contractor's yard prior to load-out. Pipe stacks shall be segregated by pipe diameter, wall thickness, anode/arrestor installation and concrete coating thickness, and if applicable source (8.1). For pipes fitted with an anode, the anode shall not be in contact with any pipe, concrete or object that could damage the anode or its connections. The Contractor shall submit a description of the manner he proposes to use for stockpiling concrete-coated pipe, together with calculations to derive the maximum stack height, for Principal's approval. Concrete-coated pipe shall not be stacked more than 4 m high. Stockpiling shall facilitate pipe load-out in the sequence and frequency required for pipe laying, as specified by the Principal.

- (P) When specified in the Scope of Work, the Contractor shall clean the inside of the coated pipe, immediately prior to load-out. *The cleaning process shall remove mill scale and loose debris from the internal pipe surface, together with surface rust, to the cleanliness standard specified by the Principal.*

- (C) The Contractor shall propose a cleaning procedure for approval by the Principal. The cleaning method employed shall not damage any internally applied coating.

10. DOCUMENTATION

10.1 GENERAL

All documentation submitted to the Principal shall be in the English language and shall reference the Principal's name and project identification.

10.2 PIPE TALLY RECORDS

A certified permanent record shall be supplied to the Principal showing all the data and measurements indicated in (10.3). The record shall also be provided in an electronic format as specified by Principal. All measurements shall be clearly logged in a proper log-book and/or pipe-tracking system.

(P)

10.3 LOGGING AND RECORDING OF DATA

Measurements and data shall be logged at the appropriate stage of the coating procedure as described in this PTS and shall include as a minimum:

A. Linepipe

- Pipe identification number
- Pipe length

B. Anti-corrosion coating

- Weight of anti-corrosion coated pipe

C. Concrete coating

- Batch identification number
- Date of application
- Weight of concrete-coated pipe (freshly coated)
- O.D. of concrete coating
- Submerged weight of concrete-coated pipe (calculated & *measured*)
- Rolling 25 consecutive joints average submerged weight (calculated)

D. Anodes

- Anode identification number

11. SUMMARY OF REQUIRED PRINCIPAL'S APPROVALS

Section/ Clause	Activity/Procedure requiring approval
2.	Materials
2.1.1	Suitability of lifting equipment
2.1.2	Stockpiling and storing method
2.3	Aggregate grading envelope
2.6.3	Cage welding procedure
3.	Equipment
3.	Third-party certification company
4.	Coating process
4.1	Procedure specification
4.2	Procedure qualification testing results
4.3	Concrete mix design
4.4.1	Holiday detector type and procedure
4.4.2.3	Reinforcement spacer type
4.5.1	Curing facilities and procedure
5.	Inspection and testing
5.1	Sampling and testing procedures
5.1	Third-party testing company/facilities
5.6.1	Impact test rig design, including safety features (if applicable)
6.	Repairs
6.1	Repair methods
6.2	Removal of rejected coating
6.4	Filling of core holes
7.	Installation of anodes
7.2	Strap welding procedure
7.3	Thermit welding equipment and procedure
7.3	Thermit weld coating material and method
7.3	Anode filling material
9.	Handling, stockpiling and loading out of concrete-coated pipe
9.	Coated pipe lifting and handling methods
9.	Coated pipe end cleaning method
9.	Coated pipe stockpiling method
9.	Coated pipe internal cleaning method (if applicable)

12. SUMMARY OF INSPECTIONS/TESTS

The types and frequency of the required inspections/tests are summarised below, with references to the appropriate sections in this PTS:

Section Reference	Test	Frequency
2.	Materials	
2.1.1	Pipe identification/damage inspection	all pipes
2.2	Cement certificates	per delivery
2.3	Aggregate cleanliness and grading	once every 3 days
2.4	Water	at Principal's discretion
2.6.3	Cage weld strength	1/week
3.	Equipment	
3.	Batching plant performance	at Principal's discretion
3.	Batch plant weighing equipment calibration	1/week
3.	Pipe weighing equipment calibration	1/shift
4.	Coating process	
4.2	Procedure qualification tests	prior to full production
4.4.1	Holiday detection	all pipes
5.	Inspection and testing	
5.2.1	Steel wire fabric location	2 pipes/shift
5.2.1	Resistance check	2 pipes/shift
5.2.2	Concrete diameter	all pipes
5.2.3	Visual inspection	all pipes
5.3	Strength and density	
	- cubes	1 x 4 cubes/25 pipes
	- cores	2 x 3 cores/15 pipes
5.4	Submerged weight	all pipes
5.5	Water absorption	
	- using samples	1/shift
	- full scale	1/day (1 st three days)
5.6.1	Impact testing (if specified)	1/week
6.	Repairs	
6.3	Prepared area prior to repair	all crack repairs
6.4	Filling of core holes	all core holes
7.	Installation of anodes	
7.1	Visual inspection of anode	all anodes
7.4	Electrical resistance of thermit weld	all thermit welds
7.4	Mechanical strength of thermit weld	all thermit welds
7.4	Visual inspection of anode strap welds	all strap welds
7.4	MPI on anode strap welds	2 pipes/shift
7.4	Electrical continuity test	all anode joints

13. SCOPE OF WORK CHECKLIST

The contract Scope of Work shall provide/specify the data/activities detailed below, for **each pipe size and coating thickness/type** required.

Section Reference	Description	Value
1.1	Concrete grade	A/B/AA
2.1.1	Pipe specification number	
	Pipe data:	
	- Outside diameter	 in
	- Wall thickness	 mm
	- Steel grade	
	- Pipe tally details (length, weight, heat no., etc.)	
2.1.1	Anti-corrosion coating specification number	
	- Anti-corrosion coating type	
	- Anti-corrosion coating thickness	 mm
	- End cut-back of anti-corrosion coating	 mm (+/- mm)
2.6.1	Reinforcement type. NOTE (1)	welded wire fabric/ rebar cage/ chicken wire
4.4.3.5	Concrete end termination	square/tapered at° to pipe axis
4.4.3.5	End cut back of concrete	 mm (+/- 15 mm)
5.2.2	Concrete thickness	 mm (+/- mm)
5.4	Submerged weight requirement (unsaturated - as applied)	
	- nominal submerged weight	... N/m
	- individual pipe tolerance	+/- ... N/m
	- 25 pipe analysis tolerance	+/- 4%
	- shift's production average tolerance	+/- 2%
	Allowable variations per pipe joint (weight in air).	
	NOTE (2)	
	- pipes fitted with anodes	+ N
	- pipes fitted with crack arrestors	+ N
	- pipes fitted with buckle arrestors	+ N
5.6.1	Impact testing	Yes/No
	NOTE (3)	
7.	Anode design drawing number (drawing to be provided by the Principal)	
7.3	Anode bonding leads supplied loose	Yes/No
8.2	Colour code	
9.	Internal pipe cleaning prior to load-out	Yes/No
9.	Internal cleanliness grade (ISO 8501-1), if applicable	St3/Sa1/Sa2
10.2	Pipe tally record	Yes/No
	- electronic version required	
	- electronic version format	

- NOTES:
1. Chicken wire is not normally recommended, see (2.6.1).
 2. These are nett variations, after allowing for reduction in concrete.
 3. Acceptance criteria need to be specified for pipes with diameter less than 16 inches, or for concrete thickness less than 50 mm.

14. FIGURES

Figure 1 Reinforcement details




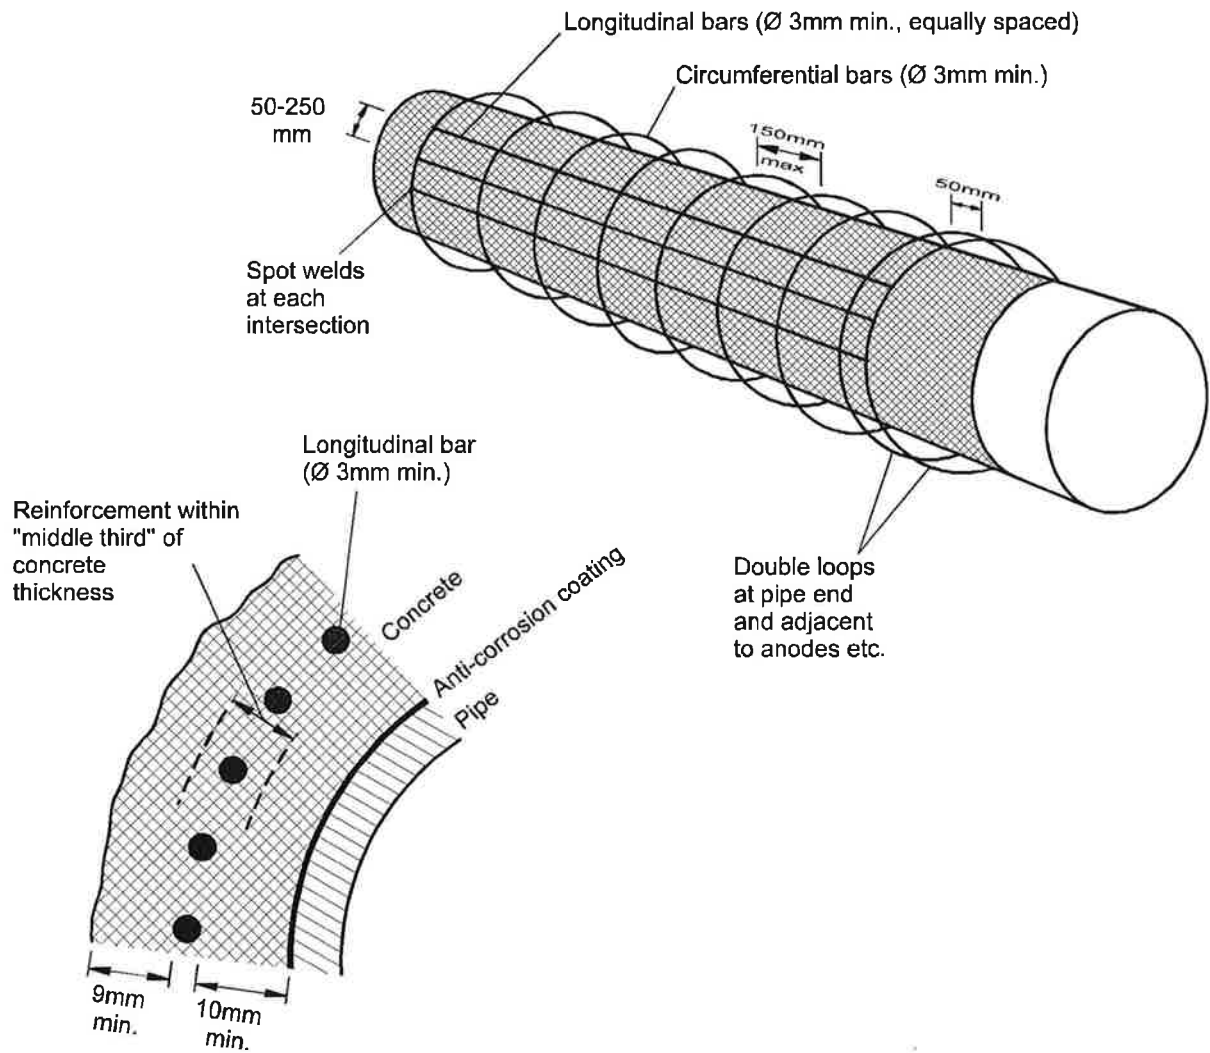


Figure 2 **Cage reinforcement details**

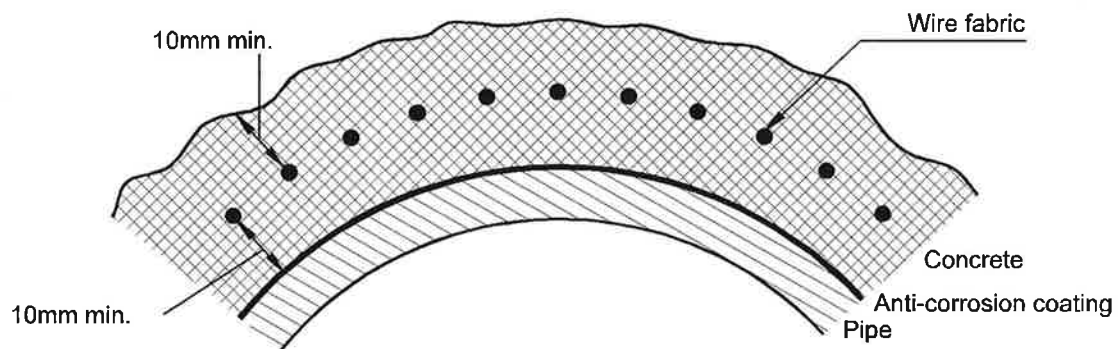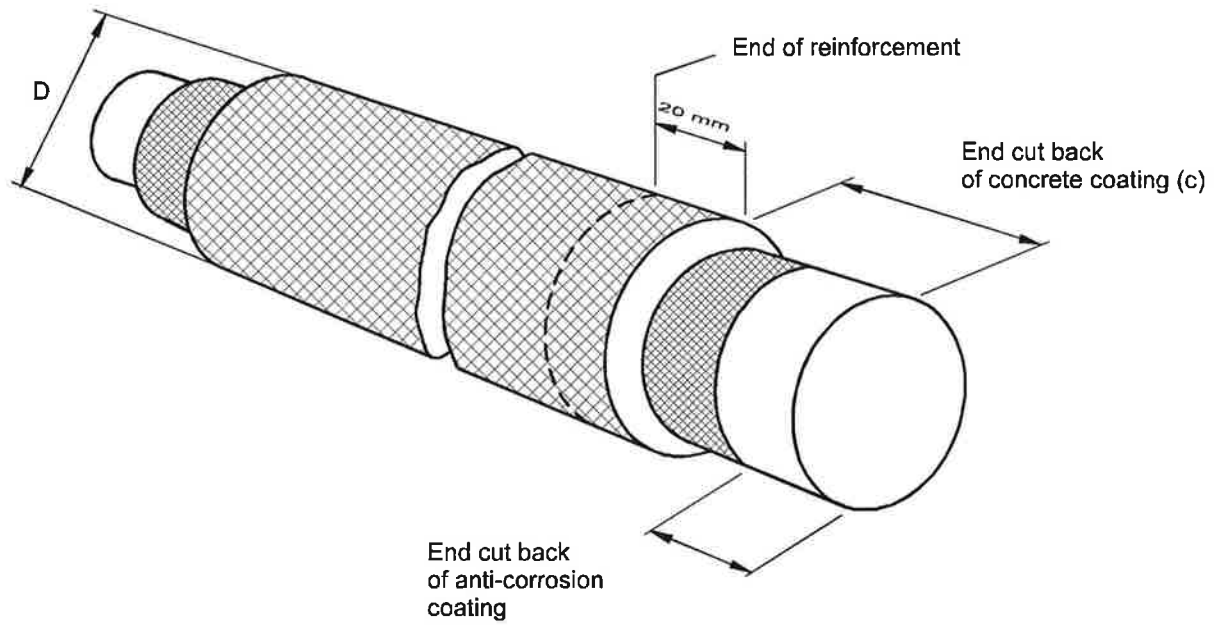

**Section through typical wire
fabric reinforcement**

Figure 3 Impact test rig

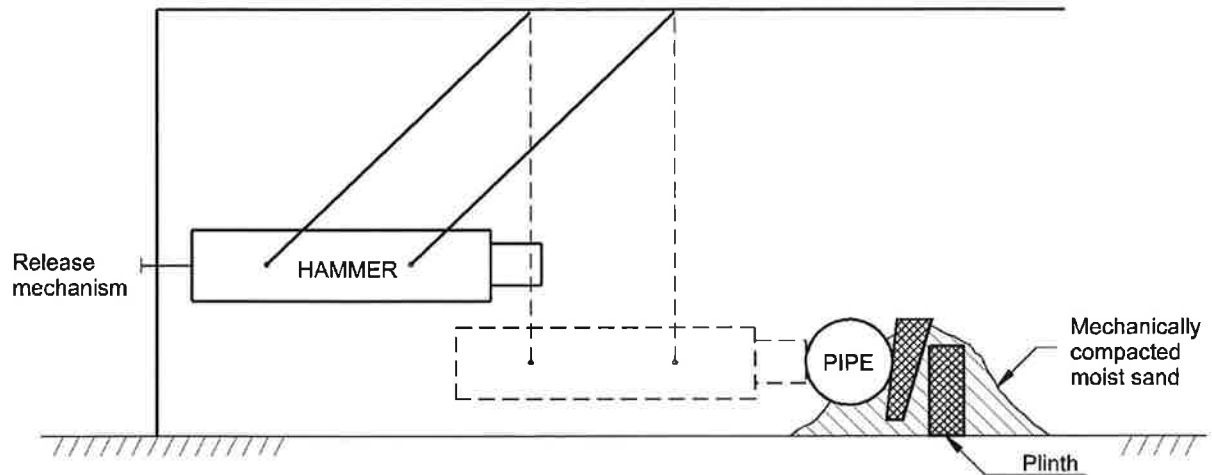

Details of hammer tip:


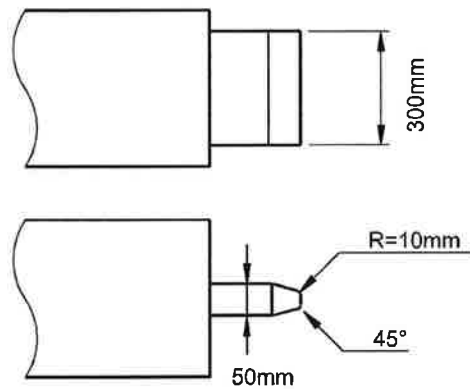


Figure 4 Cross-section through thermit weld

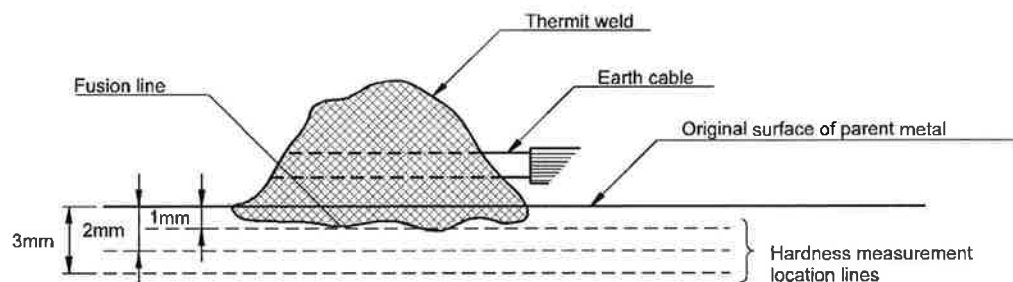

Note : Figures 1 to 3 are typical sketches showing some information of the concrete coating and its reinforcement, and typical thermit weld that is supposed to be welded onto the doubler plate as recommended in Section 7.3.

15. REFERENCES

In this PTS, reference is made to the following publications:

NOTE: Unless specifically designated by date, the latest edition of each publication shall be used, together with any amendments/supplements/revisions thereto.

AMERICAN STANDARDS

Standard specification for steel wire, plain, for concrete reinforcement	ASTM A 82
Standard specification for steel welded wire fabric, plain, for concrete reinforcement	ASTM A 185
Standard specification for zinc coated (galvanized) steel poultry fence fabric (hexagonal and straight line)	ASTM A 390
Standard specification for deformed and plain billet-steel bars for concrete reinforcement (metric)	ASTM A 615M
Standard specification for zinc coated (galvanized) carbon steel wire	ASTM A 641
Standard specification for concrete aggregates	ASTM C 33
Standard test method for compressive strength of cylindrical concrete specimens	ASTM C 39
Standard test method for obtaining and testing drilled cores and sawed beams of concrete	ASTM C 42
Standard specification for Portland cement	ASTM C 150
Standard specification for sheet materials for curing concrete	ASTM C 171
Standard specification for liquid membrane-forming compounds for curing concrete	ASTM C 309
Standard specification for blended hydraulic cements	ASTM C 595
<i>Test method for specific gravity, absorption and voids in hardened concrete</i>	<i>ASTM C 642</i>
Standard test method for Vickers hardness testing of metallic materials	ASTM E 92
Standard test method for liquid penetrant examination	ASTM E 165
Standard guide for magnetic particle examination	ASTM E 709

Issued by:
American Society for Testing and Materials,
1916 Race Street,
Philadelphia, 19103,
USA.

BRITISH STANDARDS

<i>Cement Part 1 : Composition, Specification and Conformity criteria for common cements</i>	<i>BS EN 197-1</i>
<i>Cement Part 4 : Composition, Specification and Conformity criteria for early strength blast furnace cements</i>	<i>BS EN 197-4</i>
Testing aggregates	<i>BS EN 933-1</i>

<i>Aggregates for concrete</i>	BS EN 12620
Specification for batch type concrete mixers	BS 1305
Testing concrete:	
<i>Testing hardened concrete – Part 2 : Making and curing specimens for strength tests</i>	BS EN 12390-2
<i>Testing hardened concrete – Part 3 : Compressive strength of test specimens</i>	BS EN 12390-3
<i>Testing hardened in structures – Part 1 : Core specimen – Taking, Examining and Testing in Compression</i>	BS EN 12504-1
<i>Methods of test for water for making concrete (including notes on the suitability of the water)</i>	BS EN 1008
Method for testing the mixing performance of concrete mixers	BS 3963
<i>Specification for the reinforcement of concrete</i>	BS 4449
Specification for steel wire for the reinforcement of concrete product	BS 4482
Steel fabric for the reinforcement of concrete	BS 4483
<i>Issued by: British Standards Institution, 2 Park Street, London W1A 2BS, England.</i>	
MALAYSIAN STANDARDS	
Specification for Portland Cement	MS 522

APPENDIX 1 SOME IMPORTANT DESIGN ASPECTS

A.1 CONCRETE SLIPPAGE

For submarine applications some anti-corrosion coatings, e.g. fusion-bonded epoxy, polyethylene and polypropylene, will normally need an intermediate coating to provide increased friction to avoid slippage between the concrete coating and the anti-corrosion coating during pipelaying.

For laybarges with a single tensioner, precautions may be needed to avoid breakage and slippage of the concrete at the ends of the pipe. This might be achieved with temporary infill blocks or could involve stronger longitudinal reinforcing wire. (Any dimensional irregularities at the end of the coating, e.g. "bell ends", will exacerbate this problem.)

The exposed end portion of anti-corrosion coating may become too short or even disappear if slippage does occur.

A.2 ANTI-CORROSION COATING DAMAGE

An intermediate "barrier" layer may be needed to prevent damage from the concrete impingement process.

A.3 CHOICE OF ANTI-CORROSION COATING

There are normally many factors involved in the choice of coating for a particular pipeline. The above two potential problem areas may need to be taken into account in this choice.

A.4 PIPE DIMENSIONS AND STIFFNESS

Pipes with large diameter/wall thickness (D/t) ratios have a tendency to become oval when loaded externally and may also buckle at the field joint area when the concrete-coated pipes are installed.

Large concrete thicknesses can be the cause of ovalization.