



Standard Classification for Bridge Elements—UNIFORMAT II¹

This standard is issued under the fixed designation E2103; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

1. Scope

1.1 This standard establishes a classification of bridge elements within the UNIFORMAT II family of elemental classifications. It covers most highway bridges, railroad bridges, and pedestrian bridges.

1.2 UNIFORMAT II classifications have an elemental format similar to the original UNIFORMAT² building elemental classification. However, the title UNIFORMAT II differs from the original in that it now takes into consideration a wide range of constructed entities that collectively form the built environment.

1.3 Elements, as defined here, are major physical components that are common within constructed entities. Elements perform their given function(s), regardless of the design specification, construction method, or materials used.

1.4 This elemental classification serves as a consistent reference for analysis, evaluation, and monitoring during the feasibility, planning, and design stages when constructing bridges.

1.5 Using UNIFORMAT II elemental classifications ensures a consistency in the economic evaluation of construction projects over time and from project to project.

1.6 UNIFORMAT II classifications also enhance reporting at all stages of a constructed entity's life cycle—from feasibility and planning through the preparation of working documents, construction, maintenance, rehabilitation, and disposal.

1.7 This classification is unsuitable for process applications or for preparing trade estimates.

1.8 The values stated in SI units are to be regarded as standard. The values given in parentheses are mathematical conversions to inch-pound units that are provided for information only and are not considered standard.

1.9 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.*

¹ This classification is under the jurisdiction of ASTM Committee E06 on Performance of Buildings and is the direct responsibility of Subcommittee E06.81 on Building Economics.

Current edition approved Nov. 1, 2011. Published December 2011. Originally approved in 2000. Last previous edition approved in 2006 as E2103 – 06. DOI: 10.1520/E2103-11.

² The original UNIFORMAT classification was developed jointly by the General Services Administration (GSA) and the American Institute of Architects (AIA).

2. Referenced Documents

2.1 ASTM Standards:³

E631 Terminology of Building Constructions

E833 Terminology of Building Economics

E917 Practice for Measuring Life-Cycle Costs of Buildings and Building Systems

E964 Practice for Measuring Benefit-to-Cost and Savings-to-Investment Ratios for Buildings and Building Systems

E1057 Practice for Measuring Internal Rate of Return and Adjusted Internal Rate of Return for Investments in Buildings and Building Systems

E1074 Practice for Measuring Net Benefits and Net Savings for Investments in Buildings and Building Systems

E1121 Practice for Measuring Payback for Investments in Buildings and Building Systems

E1185 Guide for Selecting Economic Methods for Evaluating Investments in Buildings and Building Systems

E1369 Guide for Selecting Techniques for Treating Uncertainty and Risk in the Economic Evaluation of Buildings and Building Systems

E1699 Practice for Performing Value Analysis (VA) of Buildings and Building Systems and Other Constructed Projects

E1804 Practice for Performing and Reporting Cost Analysis During the Design Phase of a Project

E1946 Practice for Measuring Cost Risk of Buildings and Building Systems

E2013 Practice for Constructing FAST Diagrams and Performing Function Analysis During Value Analysis Study

E2506 Guide for Developing a Cost-Effective Risk Mitigation Plan for New and Existing Constructed Facilities

E2691 Practice for Job Productivity Measurement

2.2 ASTM UNIFORMAT II Classification Standards Family:³

E1557 Classification for Building Elements and Related Sitework—UNIFORMAT II

E2083 Classification for Building Construction Field Requirements, and Office Overhead & Profit

E2168 Classification for Allowance, Contingency, and Reserve Sums in Building Construction Estimating

³ For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

E2514 Practice for Presentation Format of Elemental Cost Estimates, Summaries, and Analyses

E2516 Classification for Cost Estimate Classification System⁴

2.3 *ASTM Adjuncts:*⁴

Discount Factor Tables Adjunct to Practices **E917**, **E964**, **E1057**, **E1074**, and **E1121**

3. Terminology

3.1 *Definitions*—For definitions of general terms used in this classification, refer to Terminology **E631**, and for general terms related to building economics, refer to Terminology **E833**.

4. Significance and Use

4.1 This standard builds on the concepts and organizational framework established in Classification **E1557**. This classification describes bridge elements that are major components of most highway, railroad, and pedestrian bridges. The elemental classification is the common thread linking activities and participants in a bridge project from initial planning through operations, maintenance, and disposal.

NOTE 1—As this classification refers solely to permanent, physical parts of any construction, two additional classifications, Classifications **E2083** and **E2168**, need to be included when calculating construction cost. These standards provide for the inclusion of construction enabling, temporary, and risk mitigation cost figures. Procedures for reporting all these figures are described in Practices **E1804** and **E2514** and Classification **E2516**. While these three latter standards were primarily written for building construction, they are nonetheless appropriate and readily applied to other forms of construction as well.

4.2 *The Users of Bridge UNIFORMAT II Include:*

4.2.1 *Financial and Investment*—Typically owners, developers, bankers, lenders, accountants, and financial managers.

4.2.2 *Implementation*—Primarily project managers; facilities programmers; designers, including engineers; and project controls specialists, including cost planners, estimators, schedulers, specification writers, and risk analysts.

4.2.3 *Facilities Management*—Comprising property portfolio managers, operating staff, and maintenance staff.

4.2.4 *Others*—Public officials, manufacturers, educators, students, and other project stakeholders.

4.3 *Apply This Classification When Undertaking the Following Work on Bridges:*⁵

4.3.1 *Financing and Investing:*

4.3.1.1 Structuring costs on an elemental basis for economic evaluations (Guide **E1185** and Practices **E917**, **E964**, **E1057**, **E1074**, **E1121**, and **E1804**) early in the design process helps reduce the cost of early financial analysis and can contribute to

substantial design and operational savings before decisions have been made that limit options for potential savings.

4.3.2 *Implementing:*

4.3.2.1 *Cost Modeling, Cost Planning, Estimating and Controlling Project Time and Cost During Planning, Design, and Construction*—Use the bridge UNIFORMAT II classification to prepare budgets and to establish elemental cost plans before design begins. Project managers and project controls specialists use these cost plans against which to measure and control project cost, and quality, and to set design-to-cost targets.

4.3.2.2 *Conducting Value Engineering Workshops*—Conducting value engineering workshops (Practices **E1699** and **E2013**). Use this classification as a checklist to ensure that alternatives for all elements of significant cost in the bridge project are analyzed in the creativity phase of the job plan. Also, use the elemental cost data to expedite the development of cost models for bridge systems.

4.3.2.3 *Developing Initial Project Master Schedules*—Since projects are essentially built element by element, UNIFORMAT II classifications are an appropriate basis for preparing construction schedules at the start of the design process. Project managers and project controls specialists use these time plans against which to measure and control project time (Practice **E2691**), and to set milestone target dates.

4.3.2.4 *Performing Risk Analyses—Simulation* (Guides **E1369** and **E2506**) is one technique for developing probability distributions of bridge costs when evaluating the economic risk in undertaking a bridge project. Use individual elements and group elements in this classification for developing probability distributions of elemental costs. From these distributions, build up probability distributions of total costs to establish project contingencies (Practices **E1946** and **E2168**) or to serve as inputs to an economic analysis.

4.3.2.5 *Structuring Preliminary Project Descriptions During the Conceptual Design Phase*—This classification facilitates the description of the scope of the project in a clear, concise, and logical sequence for presentation to the client; it provides the basis for the preparation of more detailed elemental estimates during the early concept and preliminary design phases, and it enhances communication between designers and clients by providing a clear statement of the designer's intent.

4.3.2.6 *Coding and Referencing Standard Details In Computer-Aided Design Systems*—This classification allows a designer, for example, to reference an assembly according to this classification's element designations and build up a database of standard details. This is particularly appropriate to design modeling and building information modeling (BIM) applications.

4.3.3 *Managing Facilities:*

4.3.3.1 Recording and writing property condition assessment reports in a structured way, using UNIFORMAT II classifications, provides for a consistent, accessible, and searchable database of real property inventory.

4.3.4 *Other Activities:*

4.3.4.1 Structuring cost manuals and recording construction, operating, and maintenance costs in a computer database. Having a cost manual or computer database in an elemental

⁴ Available from ASTM International Headquarters. Order Adjunct No. ADJE091703. Original adjunct produced in 1984.

⁵ For a more comprehensive discussion of the uses of UNIFORMAT II, see Bowen, Charette, and Marshall, UNIFORMAT II—A Recommended Classification for Building Elements and Related Sitework, National Institute of Standards and Technology Special Publication 841, Gaithersburg, MD, 1992; and Charette and Marshall, UNIFORMAT II Elemental Classification for Building Specifications, Cost Estimating, and Cost Analysis, National Institute of Standards and Technology NISTIR 6389, Gaithersburg, MD, 1999.

format assists the preparation of an economic analysis early in the design stage and at a reasonable cost.

5. Basis of Classification

5.1 The framework in Fig. 1 shows the various constructed entities that collectively are used to create the built environment. Each entity is treated as a module. Appropriate modules used together will effectively describe any planned or built development. This standard classification describes exclusively the elements that make up one of those constructed entities, bridge structures, shown as the shaded block under the heading of Heavy (Civil) Entities.

5.1.1 This bridge classification is applicable to most types of highway, railroad, and pedestrian bridges crossing over highways, railroads, walkways, and waterways. The classification includes slab bridges; beam/girder bridges; truss bridges; true and tied-arch bridges; cable-stayed bridges; and suspension bridges. The classification does not include the following movable bridge types: draw bridges; lift bridges; and bascule bridges.

5.2 The classification is consistent with typical costing practices used at the conceptual design phase.

5.3 Each element has a significant impact on the cost, and it usually occurs frequently.

5.4 Each element performs a specific function.

5.5 Table 1 divides the classification of bridge elements into three hierarchical levels: Level 1—Major Group Elements, Level 2—Group Elements, and Level 3—Individual Elements. The Major Groups are listed in the normal chronological order of construction.

5.6 Sub-Classifications (not included in this standard) are named Sub-Elements and comprise as many hierarchical levels (Level 4 and below) as are deemed appropriate to the needs of that specific example.

5.7 The decision as to where among the classification elements to include specific construction items will rely on professional judgment as to where professionals in current practice normally look for such items.

5.8 Only items that impact the choice and cost of the bridge elements are included. Other civil works in the transportation system are not included. Consequently, this classification does not include utilities—pipelines (water, natural gas, and petroleum) and transmission lines (electrical, communication, and video)—sharing the same right of way as the transportation system.

5.9 Elements, as used and defined in UNIFORMAT II, will ideally display the following additional attributes:

5.9.1 Capable of being defined precisely;

5.9.2 Self explanatory;

5.9.3 Separable at all stages of development;

5.9.4 Quantifiable at all stages of development;

5.9.5 Capable of reconciliation with other elemental classifications;

5.9.6 Allow comparisons, project to project, in a meaningful way;

5.9.7 Is a functional component of the constructed entity.

5.10 Sitework elements are provided for exclusive use in support of the construction of bridges, not to classify elements of major civil construction works. Sitework elements presented in Table 1 are designed to provide sufficient detail to planners

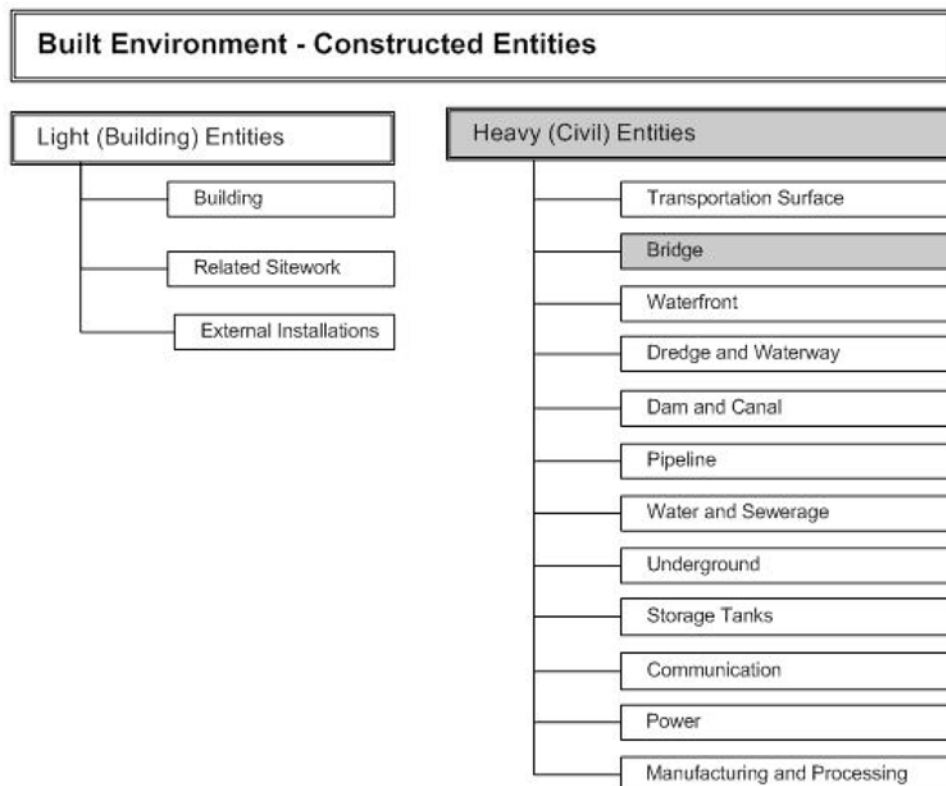


FIG. 1 List of Constructed Entities Suitable for Inclusion in the Family of UNIFORMAT II Elemental Classifications

TABLE 1 UNIFORMAT II Classification of Bridge Elements

Level 1 Major Group Elements	Level 2 Group Elements	Level 3 Individual Elements
Substructure	Piers	Foundations Walls Columns Cap Beams
	Towers	Foundations Walls Columns Cap Beams
	Abutments	Foundations Stem Abutments Wing Walls
	Other Supports	Thrust Blocks Anchorage
Superstructure	Short Span Assemblies	Flexural Members Diaphragms Bracings Bearings
	Long Span Assemblies	Ribs Cables Hangers and Sprandrels Ties Truss Members Segmental Box Girders
	Deck	Structural Surface Wearing Surface
Protection	Structure Protection	Slope Walls Expansion Joints Protective Coats Sacrificial Beams Drainage Systems Inspection and Maintenance Systems
	Traffic Protection	Barriers Protective Shields Traffic Controls
	Other Protection	Lighting Signage Sound Barrier Walls Air Pressure Barriers Enclosure
Sitework	Site Preparation	Clearing and Grubbing Demolition and Relocation Earthwork Hazardous Material Handling Environmental Restoration/Replacement
	Approach Construction	Approach Slabs Sleepers Slabs Earth Retention Systems

so they will not need to resort to other elemental classifications when working on a bridge project.

6. Description of Project Elements

6.1 *Elements and Functions*—Table 2 provides, for each Level 3 Individual Element, the name, functions, description, inclusions, exclusions, and unit of measure. The functions are classified as Primary, Secondary, and Tertiary. All three levels of functions may be served. However, one or two functions may be the driving force behind the existence of the element, and they are classified as Primary functions.

6.2 *Description*—The element descriptions help you understand the purpose and application of the element.

6.3 *Includes*—The purpose of the element inclusions is to list features that make up the element.

6.4 *Excludes*—The purpose of the element exclusions is to list features that are not included in the element but which are included elsewhere in this classification.

NOTE 2—Because this classification refers solely to permanent physical parts of bridge constructions, references to construction enabling (cranes and formwork), temporary construction (cofferdams and traffic detours), and risk mitigation (allowances and contingencies) cost figures are omitted from the element exclusions.

6.5 *Unit of Measure*—The purpose of the unit of measure is to provide a means for calculating the magnitude, or size, of each element in any bridge description; units of measure are

important to all users of elemental classifications. Units of measure are of prime importance in the elemental cost management process. Both SI and Customary units are reported. SI units are reported first followed by Customary units within parentheses. **Table 2** uses the following unit of measure abbreviations: linear metres (m) and linear feet (ft); square metres (m²) and square feet (ft²); cubic metres (m³) and cubic yards (yd³); and kilograms (kg) and pounds (lb).

7. Keywords

7.1 bridge assemblies; bridge elemental format; bridge elements; bridge functional elements; bridge systems classification; bridge cost estimation; bridge cost planning; construction; design economics; economic analysis; economic evaluation; elemental bridge classification; elemental/systems classification; life-cycle costing; master schedules; outline specifications; preliminary project description; risk analysis; sitework; standard classifications of bridge systems; UNIFORMAT II; value engineering

TABLE 2 Description of UNIFORMAT II Bridge Elements

SUBSTRUCTURE	
Piers	
	Foundations
Primary Function	Transfer load, Minimize settlement
Secondary Function	Minimize maintenance
Tertiary Function	Facilitate construction
Description	Foundations are structures that transfer the load of the bridge substructures to the ground. They may be spread footings, piles, or drilled shafts. The type depends upon the soil conditions.
Includes	Excavation and backfilling
Excludes	
Unit of Measure	m ³ (yd ³) or m (ft)
	Walls
Primary Function	Distribute load, Protect foundation
Secondary Function	Enhance appearance
Tertiary Function	Expedite construction
Description	Walls are structures that support the columns; in addition to transferring the load from the columns to the foundation, they protect the pier against impacts from vehicles, vessels, and debris.
Includes	
Excludes	
Unit of Measure	m ³ (yd ³) or kg (lb)
	Columns
Primary Function	Distribute load
Secondary Function	Enhance appearance
Tertiary Function	Expedite construction
Description	Columns are structures that support the cap beam and transfer the load from the cap beam to the wall below.
Includes	
Excludes	
Unit of Measure	m ³ (yd ³) or kg (lb)
	Cap Beams
Primary Function	Distribute load
Secondary Function	Enhance appearance
Tertiary Function	Expedite construction
Description	Cap beams are structures that receive and transfer beam loads from the deck to the bridge columns.
Includes	Bridge seat
Excludes	Bearings and anchor bolts (see Bearings, Flexural Members)
Unit of Measure	m ³ (yd ³) or kg (lb)

SUBSTRUCTURE	
Towers	
	Foundations
Primary Function	Transfer load, Minimize settlement
Secondary Function	Minimize maintenance
Tertiary Function	Facilitate construction
Description	Foundations are structures that transfer the load of the bridge substructures to the ground. They may be spread footings, piles, or drilled shafts. The type depends upon the soil conditions.
Includes	Excavation and backfilling
Excludes	
Unit of Measure	m ³ (yd ³) or m (ft)
	Walls
Primary Function	Distribute load, Protect foundation
Secondary Function	Enhance appearance
Tertiary Function	Expedite construction
Description	Walls are structures that support the columns; in addition to transferring the load from the columns to the foundation, they protect the pier against impacts from vehicles, vessels, and debris.
Includes	
Excludes	
Unit of Measure	m ³ (yd ³) or kg (lb)
	Columns
Primary Function	Distribute load
Secondary Function	Enhance appearance
Tertiary Function	Expedite construction
Description	Columns are structures that support the cap beam and transfer the load from the cap beam to the wall below.
Includes	
Excludes	
Unit of Measure	m ³ (yd ³) or kg (lb)
	Cap Beams
Primary Function	Distribute load
Secondary Function	Enhance appearance
Tertiary Function	Expedite construction
Description	Cap beams are structures that receive and transfer beam loads from the deck to the bridge columns.
Includes	Bridge seat
Excludes	Bearings and anchor bolts (see Bearings, Flexural Members)
Unit of Measure	m ³ (yd ³) or kg (lb)
SUBSTRUCTURE	
Abutments	
	Foundations
Primary Function	Transfer load, Minimize settlement
Secondary Function	Minimize maintenance
Tertiary Function	Facilitate construction
Description	Foundations are structures that transfer the load of the bridge substructures to the ground. They may be spread footings, piles, or drilled shafts. The type depends upon the soil conditions.
Includes	Excavation and backfilling
Excludes	
Unit of Measure	m ³ (yd ³) or m (ft)
	Stem Abutments
Primary Function	Distribute load, Retain earth
Secondary Function	Minimize erosion
Tertiary Function	Minimize settlement
Description	Stem abutments are usually supported on piles; they partially or fully retain earth behind, support the ends of the first and last spans of the bridge, and support the approach slab.
Includes	Bridge seat, reinforcing, concrete, and finishing
Excludes	Slope wall, foundation, and anchor bolts and bearings (see Foundations, Barriers, Slope Wall, Bearings)
Unit of Measure	m ³ (yd ³) or kg (lb)

Wing Walls	
Primary Function	Retain earth
Secondary Function	Minimize erosion
Tertiary Function	Enhance appearance
Description	Wing walls (parallel, perpendicular, or angled) are structures connected to the abutment and supported by piles that retain the embankment below the approach road.
Includes	Reinforcing, concrete, and finishing
Excludes	Approach slab and parapet (see Approach Slab, Barriers)
Unit of Measure	m ³ (yd ³)

SUBSTRUCTURE

Other Supports

Thrust Blocks	
Primary Function	Transfer load, Transfer thrust
Secondary Function	Minimizes movement
Tertiary Function	
Description	Thrust blocks are a special substructure of a true arch bridge that receive loads from the ribs and transfer loads to the foundation.
Includes	Structure excavation, reinforcing, concrete, and finishing
Excludes	Furnishing and installation of anchor bolts, bearing plates, utility relocation (see Demolition and Relocation, Flexural Members)
Unit of Measure	m ³ (yd ³)

Anchorage

Primary Function	Secure cable, Transfer load
Secondary Function	Maintain even distribution
Tertiary Function	
Description	Anchorage is a special substructure to which the weight of the deck and supporting superstructure is secured via cables and steel eye bars imbedded in solid rock or massive concrete blocks.
Includes	Structure excavation, reinforcing, concrete, finishing, and cable support (Steel Eye Bar)
Excludes	
Unit of Measure	m ³ (yd ³)

SUPERSTRUCTURE

Short Span Assemblies

Flexural Members	
Primary Function	Support Load
Secondary Function	Minimize deflection
Tertiary Function	Increase redundancy
Description	Flexural members are commonly known as beams and girders that support the bridge deck. When the depth of the girder is shallow, it is referred to as a beam.
Includes	Fabrication and installation of beams and girders
Excludes	Diaphragms, bracings, bearings (see Diaphragms, Bracings, Bearings)
Unit of Measure	kg (lb) or m (ft)

Diaphragms

Primary Function	Stabilize girder, Brace girders
Secondary Function	Facilitate deck reconstruction
Tertiary Function	
Description	Diaphragms are braces for shallow-depth beams.
Includes	
Excludes	
Unit of Measure	kg (lb) or m ³ (yd ³)

Bracings	
Primary Function	Stabilize girders
Secondary Function	Facilitate deck reconstruction
Tertiary Function	
Description	Bracings are steel angles used to brace deep-depth girders.
Includes	Fabrication and erection of structural steel angles
Excludes	
Unit of Measure	kg (lb)

Bearings

Primary Function	Transfer load
Secondary Function	Facilitate expansion and contraction
Tertiary Function	Minimize maintenance
Description	Bearings are mechanical systems that transfer vertical and longitudinal forces; expansion bearings allow rotational and longitudinal movement, whereas fixed bearings allow only rotational movement.
Includes	Fabrication and erection of bearings and anchor bolts
Excludes	Bridge seat (see Cap Beams, Stem Abutments)
Unit of Measure	EACH

SUPERSTRUCTURE

Long Span Assemblies

Ribs	
Primary Function	Transfer load
Secondary Function	Facilitate inspection
Tertiary Function	Enhance appearance
Description	Ribs are rectangular-, square-, or circular-shaped parts of the superstructure for arch bridges; they receive loads from hangers and spandrels and transfer them to the foundation.
Includes	
Excludes	
Unit of Measure	Bracings, bearings (see Bracings, Bearings) kg (lb), or m ³ (yd ³), or m (ft)

Cables

Primary Function	Transfer load
Secondary Function	Enhance appearance
Tertiary Function	
Description	Cables, made of steel wires bound together and draped over towers to anchors at each cable end, receive through hangars the load from the deck.
Includes	Fabrication and installation of cables, cable support
Excludes	Anchorage (see Anchorage)
Unit of Measure	m (ft)

Hangers and Spandrels

Primary Function	Transfer load
Secondary Function	Ease replacement
Tertiary Function	Enhance appearance
Description	Hangers are rods or strands that connect the deck to the ribs (arch bridges) or the main cable (cable-stayed or suspension bridges); they receive loads from the deck and transfer loads to the ribs or main cable in Tension. Spandrels are similar in transferring the deck loads. They transfer the loads in compression. They are below the deck and above the rib.
Includes	Splices (rod), strand assembly, protection
Excludes	End connections (see Flexural Members and Ribs)
Unit of Measure	m (ft)

Ties

Primary Function	Eliminate thrust
Secondary Function	
Tertiary Function	
Description	A tie is a horizontal tension member that connects the two ends of the compression ribs of an arch bridge and balances the horizontal thrust.
Includes	Fabrication and erection of structural steel, stiffeners, splices, and other connections
Excludes	Hangers, bearings (see Bearings, Hangers and Spandrels)
Unit of Measure	kg (lb)

Truss Members	
Primary Function	Support load, Reduce weight
Secondary Function	Minimize deflection
Tertiary Function	
Description	Truss members, connected at nodes by plates, are two-dimensional structures that support the superstructure.
Includes	Splices and other connections
Excludes	Bracings, bearings (see Bracings, Bearings)
Unit of Measure	kg (lb), or m ³ (yd ³), or m (ft)

Segmental Box Girders	
Primary Function	Support Load
Secondary Function	Minimize deflection
Tertiary Function	Facilitate Construction
Description	Segmental box girders are concrete box sections with or without overhanging flanges. The segments are precast sections which are post tensioned in the field.
Includes	Post tensioning
Excludes	Bracings, bearings (see Bracings, Bearings)
Unit of Measure	m (ft)

SUPERSTRUCTURE Deck

Structural Surface	
Primary Function	Transfer load
Secondary Function	Minimize maintenance
Tertiary Function	Facilitate future expansion
Description	The structural surface supports the wearing surface and traffic.
Includes	Reinforcing, concrete, and finishing
Excludes	Expansion joint assembly, parapet, barriers (see Expansion Joints, Barriers, Drainage Systems)
Unit of Measure	m ³ (yd ³) or EACH

Wearing Surface	
Primary Function	Protect structure, Guide traffic
Secondary Function	Comfort riders
Tertiary Function	Reduce maintenance
Description	The wearing surface is the part of the road or rail system that comes into contact with the vehicle or train car wheels.
Includes	Concrete or asphalt overlay or rails, striping, marking,
Excludes	
Unit of Measure	m ² (yd ²)

PROTECTION Structure Protection

Slope Walls	
Primary Function	Protect abutment
Secondary Function	Prevent erosion
Tertiary Function	Enhance appearance
Description	Slope walls, made of stone, concrete, gravel, or gravel with asphalt mix, support the sloped surface and protect the bridge abutment.
Includes	Reinforcing, concrete, and finishing
Excludes	Excavation and backfill (see Earthwork)
Unit of Measure	m ² (yd ²)

Expansion Joints	
Primary Function	Facilitate expansion and contraction
Secondary Function	Maintain smooth surface
Tertiary Function	Facilitate replacement
Description	Expansion joints allow expansion and contraction of the slab while keeping the substructure stationary.
Includes	Furnishing and installation of expansion joint support and expansion joint
Excludes	
Unit of Measure	m (ft)

Protective Coats	
Primary Function	Protect structure
Secondary Function	Minimize maintenance
Tertiary Function	
Description	Protective coats are paints, sealants, or preservatives that are applied to concrete surfaces of the bridge.
Includes	Minor repair work, cleaning surface, and coating
Excludes	Major repair work to other bridge elements
Unit of Measure	m ² (yd ²)

Sacrificial Beams	
Primary Function	Protect girders
Secondary Function	Reduce maintenance
Tertiary Function	
Description	Sacrificial beams have a lower clearance than the main beams to ensure that excessive-height vehicles will hit the sacrificial beam before impacting the main beams.
Includes	Fabrication and erection of structural steel, stiffeners, splices, and other connections
Excludes	Bracings, bearings (see Bracings, Bearings)
Unit of Measure	kg (lb)

Drainage Systems	
Primary Function	Minimize erosion
Secondary Function	Protect traffic
Tertiary Function	Protect structure
Description	Drainage systems are scuppers to drain the bridge deck, downspouts to carry off the water from the scuppers, and buried drains behind abutments and adjacent to sleeper slabs.
Includes	Fabrication and installation of scuppers, drain tiles, drain pipes, and related earthwork
Excludes	Structural surface (see Structural Surface)
Unit of Measure	EACH or m (ft)

Inspection and Maintenance Systems	
Primary Function	Facilitate inspection
Secondary Function	Facilitate maintenance
Tertiary Function	
Description	These systems include platforms, railings, stairways, and hoist ways to facilitate inspection and maintenance.
Includes	Handrails or other type of barriers
Excludes	
Unit of Measure	m ² (yd ²)

PROTECTION Traffic Protection

Barriers	
Primary Function	Separate traffic, Protect occupants
Secondary Function	Protect structure
Tertiary Function	Minimize maintenance
Description	Barriers are structures designed to: withstand forces due to crashes; separate the opposing traffic; and protect bridge structures adjacent to live traffic.
Includes	Noise wall support, or light pole support
Excludes	
Unit of Measure	m ³ (yd ³)

Protective Shields	
Primary Function	Protect traffic (below)
Secondary Function	
Tertiary Function	
Description	Protective shields are barriers below the bridge deck to protect traffic below from falling objects.
Includes	Membranes and supports designed to catch falling objects
Excludes	
Unit of Measure	m ² (yd ²)

Traffic Controls	
Primary Function	Manage Traffic
Secondary Function	
Tertiary Function	
Description	Traffic controls are an assembly of signals, supports, and conduits.
Includes	Power source and related items
Excludes	
Unit of Measure	EACH
PROTECTION	
Other Protection	
Lighting	
Primary Function	Protect traffic
Secondary Function	Guide traffic
Tertiary Function	Discourage vandalism
Description	Lighting is illumination from fixtures that provide vehicle traffic direction, ship navigation direction, task lighting, and vandalism discouragement.
Includes	Fabrication and installation of mast, lights, base plates, and power
Excludes	Base support (see Barriers)
Unit of Measure	EACH
Signage	
Primary Function	Guide traffic
Secondary Function	Simplify or consolidate message
Tertiary Function	
Description	Signage is the provision of information through electronic or printed message boards.
Includes	Fabrication and installation of sign and support, and power
Excludes	
Unit of Measure	EACH
Sound Barrier Walls	
Primary Function	Abate traffic noise
Secondary Function	Create visual barrier
Tertiary Function	Enhance appearance
Description	A sound barrier wall is a structure to mask traffic noise from the surrounding neighborhood.
Includes	Wall panel, support, and connection to barrier
Excludes	Base (see Barriers)
Unit of Measure	m ² (yd ²)
Air Pressure Barriers	
Primary Function	Protect people
Secondary Function	Protect property
Tertiary Function	
Description	Air pressure barriers are structures to mitigate the impact of significant air pressure differentials created by the passing of high speed transportation vehicles.
Includes	Barriers mounted on bridges to mitigate the impact of air pressure differentials.
Excludes	Base (see Barriers)
Unit of Measure	m ² (yd ²)
Enclosure	
Primary Function	Protect pedestrians and protect traffic
Secondary Function	Facilitate maintenance
Tertiary Function	Enhance appearance
Description	An enclosure is a vertical envelope with roof to protect pedestrians and traffic crossing over a bridge.
Includes	Structural and architectural members to contain pedestrians and traffic with expansion joints at the ends
Excludes	
Unit of Measure	m ² (yd ²)

SITEWORK	
Site Preparation	
Clearing and Grubbing	
Primary Function	Eliminate obstacles
Secondary Function	Create staging area
Tertiary Function	Provide temporary drainage
Description	Clearing is the removal from the construction site of trees and abandoned utilities, and the grading and leveling of the site. Grubbing is the removal of stumps and tree roots.
Includes	Tree removal, abandoned utilities, minor earthwork
Excludes	Major earth work and major utility removal (see Demolition and Relocation, Earthwork)
Unit of Measure	EACH or Hectare (Acre)
Demolition and Relocation	
Primary Function	Eliminate obstacles
Secondary Function	Protect structures
Tertiary Function	Protect environment
Description	Demolition is the complete or partial (e.g., deck or superstructure) removal of an existing bridge, carried out on the whole bridge at once or by removing a portion of the deck or superstructure in stages to maintain traffic; relocation is the removal and reinstallation of utilities.
Includes	Removal of bridge elements and disposal, relocation of utilities such as storm sewer
Excludes	
Unit of Measure	EACH
Earthwork	
Primary Function	Prepare grade
Secondary Function	Protect structures
Tertiary Function	Protect environment
Description	Earthwork is excavation, placement, and compaction of material to raise the bridge profile (material is hauled in and compacted) and to lower the bridge profile (material is excavated and hauled away).
Includes	Shrinkage factor for embankment, hauling material to or from the site
Excludes	Removal of hazardous material, structure excavation and back fill (see Demolition and Relocation, Foundations)
Unit of Measure	m ³ (yd ³)
Hazardous Material Handling	
Primary Function	Protect environment
Secondary Function	Dispose hazardous waste
Tertiary Function	Protect workers
Description	Hazardous material handling is the discovery, excavation, recovery, and disposal of hazardous materials.
Includes	Excavation and disposal of material
Excludes	General excavation (see Demolition and Relocation, Earthwork)
Unit of Measure	m ³ (yd ³)
Environmental Restoration/Replacement	
Primary Function	Protect environment
Secondary Function	
Tertiary Function	
Description	Environmental restoration/replacement is the activity of restoring or replacing elements of the environment disturbed by construction.
Includes	Restoration or replacement of wetlands
Excludes	
Unit of Measure	Hectare (Acre)

SITWORK
Approach Construction

	Approach Slabs
Primary Function	Provide transition
Secondary Function	Minimize settlement effects
Tertiary Function	Facilitate construction
Description	An approach slab, supported by the bridge abutment on one side and a sleeper slab or soil on the other, provides a smooth transition between the roadway and the bridge, and spans any settlement gap between the abutment and the roadway.
Includes	Granular fill, drain tiles, concrete, reinforcing, and finishing
Excludes	Barrier and wing wall (see Barriers, Wing Walls)
Unit of Measure	m ² (yd ²)

Sleeper Slabs

Primary Function	Protect substructure
Secondary Function	Exclude water
Tertiary Function	Minimize maintenance
Description	Sleeper slabs are rectangular concrete foundations that support approach slabs.
Includes	Excavation and backfill, concrete, reinforcing and finishing
Excludes	Approach slab (see Approach Slabs)
Unit of Measure	m ³ (yd ³)

Earth Retention Systems

Primary Function	Retain embankment
Secondary Function	Enhance appearance
Tertiary Function	Facilitate construction
Description	Earth retention systems are designed to support embankments when the grades are not uniform.
Includes	Its foundation and wall
Excludes	Excavation and backfill (see Earthwork)
Unit of Measure	m ³ (yd ³) or m ² (yd ²)

ASTM International takes no position respecting the validity of any patent rights asserted in connection with any item mentioned in this standard. Users of this standard are expressly advised that determination of the validity of any such patent rights, and the risk of infringement of such rights, are entirely their own responsibility.

This standard is subject to revision at any time by the responsible technical committee and must be reviewed every five years and if not revised, either reapproved or withdrawn. Your comments are invited either for revision of this standard or for additional standards and should be addressed to ASTM International Headquarters. Your comments will receive careful consideration at a meeting of the responsible technical committee, which you may attend. If you feel that your comments have not received a fair hearing you should make your views known to the ASTM Committee on Standards, at the address shown below.

This standard is copyrighted by ASTM International, 100 Barr Harbor Drive, PO Box C700, West Conshohocken, PA 19428-2959, United States. Individual reprints (single or multiple copies) of this standard may be obtained by contacting ASTM at the above address or at 610-832-9585 (phone), 610-832-9555 (fax), or service@astm.org (e-mail); or through the ASTM website (www.astm.org). Permission rights to photocopy the standard may also be secured from the ASTM website (www.astm.org/COPYRIGHT/).

Copyright ASTM International
Provided by IHS under license with ASTM
No reproduction or networking permitted without license from IHS