



DPC: 12 / 30257558 DC

BSI Group Headquarters

389 Chiswick High Road London W4 4AL

Tel: +44 (0)20 8996 9000

Fax: +44 (0)20 8996 7400

www.bsigroup.com

Date: 14 December 2012

Origin: European

Latest date for receipt of comments: 31 March 2013

Project No. 2011/03420

Responsible committee: TDW/4 Technical Product Realization

Interested committees: TDW/4/10

Title: Draft BS ISO 10628-1 Diagrams for the chemical and petrochemical industry

Part 1: Specification of diagrams

Please notify the secretary if you are aware of any keywords that might assist in classifying or identifying the standard or if the content of this standard

- i) has any issues related to 3rd party IPR, patent or copyright
- ii) affects other national standard(s)
- iii) requires additional national guidance or information

**WARNING: THIS IS A DRAFT AND MUST NOT BE REGARDED OR USED AS A BRITISH STANDARD.
THIS DRAFT IS NOT CURRENT BEYOND 31 March 2013**

This draft is issued to allow comments from interested parties; all comments will be given consideration prior to publication. No acknowledgement will normally be sent. **See overleaf for information on the submission of comments.**

No copying is allowed, in any form, without prior written permission from BSI except as permitted under the Copyright, Designs and Patent Act 1988 or for circulation within a nominating organization for briefing purposes. Electronic circulation is limited to dissemination by e-mail within such an organization by committee members.

Further copies of this draft may be purchased from BSI Shop <http://shop.bsigroup.com> or from BSI Customer Services, Tel: +44(0) 20 8996 9001 or email cservices@bsigroup.com. British, International and foreign standards are also available from BSI Customer Services.

Information on the co-operating organizations represented on the committees referenced above may be obtained from <http://standardsdevelopment.bsigroup.com>

Responsible Committee Secretary: **Miss Sarah Kelly (BSI)**Direct tel: **020 8996 7990**E-mail: sarah.kelly@bsigroup.com

Introduction

This draft standard is based on European discussions in which the UK has taken an active part. Your comments on this draft are welcome and will assist in the preparation of the consequent British Standard. Comment is particularly welcome on national, legislative or similar deviations that may be necessary.

Even if this draft standard is not approved by the UK, if it receives the necessary support in Europe, the UK will be obliged to publish the official English Language text unchanged as a British Standard and to withdraw any conflicting standard.

UK Vote

Please indicate whether you consider the UK should submit a negative (with reasons) or positive vote on this draft.

Submission of Comments

- The guidance given below is intended to ensure that all comments receive efficient and appropriate attention by the responsible BSI committee. **Annotated drafts are not acceptable and will be rejected.**
- All comments must be submitted, preferably electronically, to the Responsible Committee Secretary at the address given on the front cover. Comments should be compatible with version 6.0 or version 97 of Microsoft Word for Windows, if possible; otherwise comments in ASCII text format are acceptable. **Any comments not submitted electronically should still adhere to these format requirements.**
- All comments submitted should be presented as given in the example below. Further information on submitting comments and how to obtain a blank electronic version of a comment form are available from the BSI website at:
<http://drafts.bsigroup.com/>

Template for comments and secretariat observations

Date: xx/xx/20xx	Document: ISO/DIS xxxx
------------------	-------------------------------

1	2	(3)	4	5	(6)	(7)
MB	Clause No./ Subclause No./Annex (e.g. 3.1)	Paragraph/ Figure/ Table/Note	Type of comment	Comment (justification for change) by the MB	Proposed change by the MB	Secretariat observations on each comment submitted
	3.1	Definition 1	ed	Definition is ambiguous and needs clarifying.	Amend to read '...so that the mains connector to which no connection...'	
	6.4	Paragraph 2	te	The use of the UV photometer as an alternative cannot be supported as serious problems have been encountered in its use in the UK.	Delete reference to UV photometer.	



DRAFT INTERNATIONAL STANDARD ISO/DIS 10628-1

ISO/TC 10/SC 10

Secretariat: DIN

Voting begins on
2012-12-13

Voting terminates on
2013-05-13

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION

Diagrams for the chemical and petrochemical industry

Part 1: Specification of diagrams

Schémas de procédé pour l'industrie chimique et pétrochimique —

Partie 1: Spécification des schémas de procédé

[Revision of first edition (ISO 10628:1997)]

ICS 01.110; 71.020; 75.020

ISO/CEN PARALLEL PROCESSING

This draft has been developed within the International Organization for Standardization (ISO), and processed under the **ISO-lead** mode of collaboration as defined in the Vienna Agreement.

This draft is hereby submitted to the ISO member bodies and to the CEN member bodies for a parallel five-month enquiry.

Should this draft be accepted, a final draft, established on the basis of comments received, will be submitted to a parallel two-month approval vote in ISO and formal vote in CEN.

To expedite distribution, this document is circulated as received from the committee secretariat. ISO Central Secretariat work of editing and text composition will be undertaken at publication stage.

Pour accélérer la distribution, le présent document est distribué tel qu'il est parvenu du secrétariat du comité. Le travail de rédaction et de composition de texte sera effectué au Secrétariat central de l'ISO au stade de publication.

THIS DOCUMENT IS A DRAFT CIRCULATED FOR COMMENT AND APPROVAL. IT IS THEREFORE SUBJECT TO CHANGE AND MAY NOT BE REFERRED TO AS AN INTERNATIONAL STANDARD UNTIL PUBLISHED AS SUCH.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.

Copyright notice

This ISO document is a Draft International Standard and is copyright-protected by ISO. Except as permitted under the applicable laws of the user's country, neither this ISO draft nor any extract from it may be reproduced, stored in a retrieval system or transmitted in any form or by any means, electronic, photocopying, recording or otherwise, without prior written permission being secured.

Requests for permission to reproduce should be addressed to either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Reproduction may be subject to royalty payments or a licensing agreement.

Violators may be prosecuted.

Contents

Page

Foreword	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Classification, information content and presentation of flow diagrams	1
4.1 General	1
4.2 Block diagrams	2
4.2.1 General representation rules	2
4.2.2 Basic information	2
4.2.3 The block diagram shall contain at least the following information:	2
4.2.4 Additional information	2
4.3 Process flow diagrams	3
4.3.1 General	3
4.3.2 Basic information	3
4.3.3 Additional information	3
4.4 Piping and instrumentation diagrams (P&ID)	4
4.4.1 General	4
4.4.2 Basic information	4
4.4.3 Additional information	4
5 Drafting rules	5
5.1 General	5
5.1.1 Sheet sizes	5
5.1.2 Title block	5
5.2 Layout of flow diagrams	5
5.3 Connecting lines	5
5.3.1 Line widths	5
5.3.2 Minimum space of parallel lines	6
5.3.3 Flow direction	6
5.3.4 Connections	6
5.3.5 Connections of auxiliary system lines	7
5.4 Inscription	7
5.4.1 Type of lettering	7
5.4.2 Height of lettering	7
5.4.3 Lettering arrangement	7
5.5 Scale	8
5.6 Limits	8
Annex A (informative) Examples of flow diagrams for process plants	9

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 10628-1 was prepared by Technical Committee ISO/TC 10, *Technical product documentation*, Subcommittee SC 10, *Process plant documentation*.

This second/third/... edition cancels and replaces the first/second/... edition (), [clause(s) / subclause(s) / table(s) / figure(s) / annex(es)] of which [has / have] been technically revised.

ISO 10628 consists of the following parts, under the general title *Diagrams for chemical and petrochemical industry*:

- *Part 1: Specifications of diagrams*
- *Part 2: Graphical symbols*

Diagrams for chemical and petrochemical industry — Part 1: Specifications of diagrams

1 Scope

This standard specifies the classification, content and representation of flow diagrams. In addition, it lays down rules for drafting flow diagrams for chemical and petrochemical industry.

This standard does not apply to electrical engineering flow diagrams. This standard is a collective application standard of ISO 15519

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 128 (all parts), *Technical drawings - General principles of presentation*

ISO 3098-2:2000-11, *Technical product documentation - Lettering - Part 2: Latin alphabet, numerals and marks*

ISO 5457:1999-02, *Technical product documentation - Sizes and layout of drawing sheets*

ISO 7200:2004-02, *Technical product documentation – Data fields in title blocks and document headers*

ISO 10209 (all parts), *Technical product documentation; vocabulary*

ISO 14617 (all parts), *Graphical symbols for diagrams*

ISO 15519 (all parts), *Specification for diagrams for process industry*

ISO 80000 (all parts), *Quantities and units*

ISO 80416-2:2001-07, *Basic principles for graphical symbols for use on equipment - Part 2: Form and use of arrows*

IEC 62424:2008-08, *Representation of process control engineering requests in P&I diagrams and data exchange between P&ID tools and PCE-CAE tools*

3 Terms and definitions

For the purposes of this document, the terms and definitions specified in ISO 10209 (all parts), ISO 14617 (all parts), ISO 15519 (all parts) and IEC 62424 apply.

4 Classification, information content and presentation of flow diagrams

4.1 General

Flow diagrams show the structure and function of the process plants and are part of the entire set of technical documents which are required for planning, assembly, construction, management, commissioning, operation, maintenance, shutdown and decommissioning of a plant.

Flow diagrams are a means by which information is exchanged between parties involved in the construction, assembly, operation and maintenance of such process plants. General rules and recommendations for preparation of flow diagrams given in ISO 15519.

Depending on the information required, a distinction should be made between block diagrams, process flow diagrams and piping and instrumentation diagrams (P&ID).

Each particular type of flow diagram shall take the functional requirements into consideration.

The graphical presentation shall conform to the rules set down in Clause 5. Flow routes and flow directions shall be indicated by lines and arrows.

All equipment, machinery, flow lines (pipelines, transport routes) and valves shall be represented in accordance with ISO 10628-2.

The measuring, control and regulating tasks shall be represented in accordance with IEC 62424.

4.2 Block diagrams

4.2.1 General representation rules

The block diagram depicts a process or process plant in simplified form by means of rectangular frames which are interconnected by flow lines (see Figures A.1 and A.2 for examples).

The rectangular frames may represent the following:

- processes;
- process steps;
- unit operations;
- process plants or groups of process plants;
- plant sections;
- equipment.

The flow lines may represent streams of materials or energy flows.

4.2.2 Basic information

4.2.3 The block diagram shall contain at least the following information:

- a) denomination of frames;
- b) denomination of ingoing and outgoing materials;
- c) direction of main material flows between frames.

4.2.4 Additional information

The block diagram may also contain the following information:

- a) denomination of the main material flows between the frames;
- b) flow rates or quantities of ingoing and outgoing materials;
- c) flow rates or quantities of ingoing and outgoing energy or energy carriers;
- d) main material flows between the frames representing energy or energy carriers;

- e) characteristic operating conditions.

4.3 Process flow diagrams

4.3.1 General

The process flow diagram depicts a process or a process plant by means of graphical symbols which are interconnected by lines (see Figures A.3 and A.4 for examples).

An utility flow diagram (UFD) is a special type of process flow diagram. It is a schematic representation of the energy utility systems within a process plant, showing all lines and other graphic means required for the representation of transport, distribution and collection of forms of energy. In an utility flow diagram, process equipment can be represented by boxes with inscriptions (e.g. identification numbers) and with utility connections (see Figure A.5 for an example).

The graphical symbols represent equipment and the lines represent flows of mass, energy or energy carriers.

4.3.2 Basic information

The process flow diagram shall contain at least the following information:

- a) kind of apparatus and machinery, except drives, needed for the process;
- b) reference designations for equipment and machinery, except drives;
- c) route and direction of the ingoing and outgoing material and energy flows;
- d) denomination and flow rates or quantities of ingoing and outgoing materials;
- e) denomination of energy types and/or energy carriers;
- f) characteristic operating conditions.

4.3.3 Additional information

The process flow diagram may also contain the following additional information:

- a) denomination and flow rates or quantities of materials between the process steps;
- b) flow rates or quantities of energy and/or energy carriers;
- c) essential valves and their arrangement in the process;
- d) functional demands for process measuring and control devices at important points;
- e) supplementary operating conditions;
- f) characteristic data of equipment and machinery (except drives), given in separate lists, if necessary;
- g) characteristic data of drives, given in separate lists, if necessary;
- h) elevation of platforms and approximate relative vertical position of equipment.

4.4 Piping and instrumentation diagrams (P&ID)

4.4.1 General

The piping and instrumentation diagram (P&ID) is based on the process flow diagram and depicts the technical realization of a process by means of graphical symbols representing equipment and piping, together with graphical symbols for process measurement and control functions (see Figures A.6 for an example).

All equipment, valves and fittings shall be represented in accordance with ISO 10628-2.

The process measuring and control tasks shall be represented in accordance with IEC 62424.

Auxiliary systems may be represented by rectangular frames with references to separate flow diagrams.

4.4.2 Basic information

The piping and instrumentation diagram shall contain at least the following information:

- a) function and type of equipment and machinery, including drives, conveyors and installed back-up/reserve equipment;
- b) identification numbers of apparatus and machinery, including drives;
- c) characteristic data of equipment and machinery, given in separate lists if necessary;
- d) indication of nominal sizes, pressure ratings, material and type of piping, e.g. by stating the pipeline number, piping class or identification number;
- e) details of equipment, machinery, piping, valves and fittings;
- f) process measuring and control functions, with identification number;
- g) characteristic data of drives, given in separate lists if necessary.

4.4.3 Additional information

The piping and instrumentation diagram may also contain the following additional information:

- a) denomination and flow rates or amounts of energy or energy carriers;
- b) route and direction of flow of energy or energy carriers;
- c) type of essential devices for process measuring and control;
- d) essential construction materials for equipment and machinery;
- e) elevation of platforms and approximate relative vertical position of equipment;
- f) reference designations of valves and fittings;
- g) denomination of equipment.

5 Drafting rules

5.1 General

5.1.1 Sheet sizes

A1 size as defined in ISO 5457 shall preferably be used for drawing sheets. Considering the various copying techniques (reduction) available, long sizes and sizes larger than A1 are to be avoided.

5.1.2 Title block

The basic title block for drawings and lists (with additional fields) as shown in ISO 7200 shall be used.

5.2 Layout of flow diagrams

Dimensions of the graphical symbols for equipment and machinery – except for pumps, drives, valves and fittings – should reflect the actual relative dimensions in terms of scale and elevation.

Devices to be expected at the uppermost level of the plant shall be shown at the top of the drawing and those expected to be located at the lowest level shall be shown at the bottom of the drawing.

The graphical symbols for process-related measuring and control functions for equipment, machinery and piping, as well as those representing piping and valves, shall be shown in the logical position corresponding to their functions.

5.3 Connecting lines

5.3.1 Line widths

Line widths shall be related to the grid module for flow diagrams, $M = 2,5 \text{ mm}$.

To obtain a clear representation, different line widths shall be used. Lines representing main flows or main piping shall be highlighted.

The following line widths as specified in ISO 128 (all parts) shall be used:

- a) 1,0 mm (0,4 M) for main flow lines;
- b) 0,5 mm (0,2 M) for
 - graphical symbols representing equipment and machinery, except valves and fittings and piping accessories,
 - rectangular frames representing unit operations, process equipment etc.,
 - subsidiary flow lines,
 - energy carrier lines and auxiliary system lines;
- c) 0,25 mm (0,1 M) for
 - graphical symbols representing valves and fittings and piping accessories,
 - symbols representing process measuring and control functions, control and data transmission lines,
 - reference lines,
 - other auxiliary lines.

Line widths less than 0,25 mm (0,1 M) shall not be used.

5.3.2 Minimum space of parallel lines

The minimum space between parallel lines shall be at least twice the width of the widest line, but at least equal to 1 mm. Space between flow lines should be greater than 10 mm.

5.3.3 Flow direction

Normally, the main flow direction shall be drawn from left to right and from top to bottom.

Inlet and outlet arrows conforming to ISO 80416-2 shall be used to indicate the flows of essential substances into and out of the plant depicted in the diagram.

Arrows are to be incorporated in the lines to indicate the direction of the flows within the flow diagram. In order to facilitate understanding, arrows may be used at the inlets to equipment and machinery (except for pumps) and upstream of pipe branches.

Arrows for inlet or outlet of essential substances see Figure 1.




Figure 1

Arrows for receprocoating for inlet or outlet of essential substances see Figure 2.





Figure 2

If a diagram consists of several sheets, it is recommended that lines representing incoming and outgoing flows and piping shall be drawn in such a manner that these lines continue at the same level when the individual sheets are placed next to one another horizontally and are aligned vertically.

5.3.4 Connections


When pipes represented by the same line width cross, but are not connected to each other, the line depicting the vertical pipe shall be interrupted (see Figure 3a).

When pipes represented by different line widths cross, but are not connected to each other, the line depicting the thinner pipe shall be interrupted (see Figure 3b).

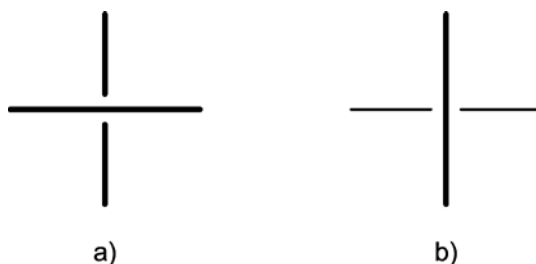

Crossing pipes represented by the same line widths

Crossing pipes represented by different line widths

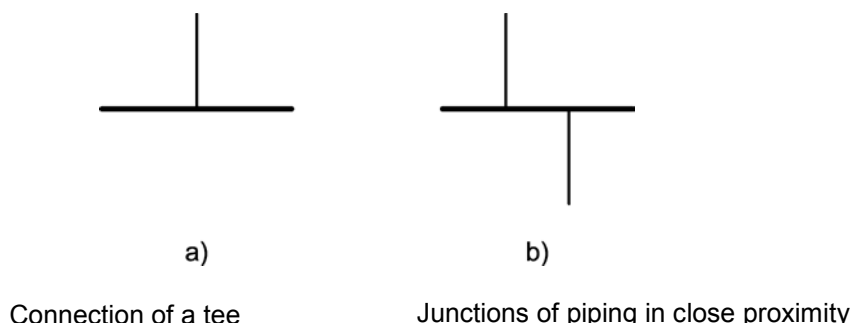Figure 3 — Representation of unconnected crossing pipes**Figure 4 — Representation of connected pipes****5.3.5 Connections of auxiliary system lines**

Auxiliary system lines shall be shown by dashed lines with an indication of the flow direction and reference to the type of energy carrier and, if possible, the drawing number (see Figure A.6).

5.4 Inscription**5.4.1 Type of lettering**

Type B vertical lettering in accordance with ISO 3098-2 is recommended.

Legends and designations in P&IDs shall always be written in upper-case characters. The only exceptions to this rule are chemical formulae (e.g. NaCl), abbreviations referring to technical regulations and legislation (e.g. BImSchG), and other cases where there is a danger of confusion if only upper case characters are used.

5.4.2 Height of lettering

The height of letters shall be:

- a) 5 mm for reference designations of equipment and machinery;
- b) 2,5 mm for other lettering.

5.4.3 Lettering arrangement

- a) Plant equipment

Reference designations of equipment shall be located so that the relationship is unambiguous, but shall normally not be printed inside the relevant graphic symbol.

Further details (e.g. designation, nominal capacity, pressure, material) can either be placed below the reference designations or shown in separate tables.

- b) Flow lines or piping

Designations of flow lines or piping shall be written above and parallel to horizontal lines and to the left of and parallel to vertical lines.

If the beginning and end of flow lines or piping are not immediately recognizable, corresponding elements shall be indicated by identical identification letters.

c) valves and fittings

Reference designation of valves and fittings shall normally be written next to the corresponding graphic symbol and parallel to the flow direction.

d) Process measurement and control systems

The designation shall be in accordance with IEC 62424.

e) Flow rates and/or quantities, operating conditions, thermophysical properties

Flow rates and/or quantities, operating conditions and thermophysical properties shall be entered either in rectangular frames or in a separate table. The frames shall be connected to the reference points by means of reference lines and shall be arranged parallel to and above horizontal lines and to the left or right of vertical lines, respectively. If the data are shown in tabular form, serial numbers corresponding to the data list shall be written in the frames.

f) SI units in accordance with ISO 1000 shall be used.

5.5 Scale

When drafting P&IDs, the following aspects shall be taken into account with regard to scales, elevation levels and piping:

1. As a rule, P&I flow diagrams are not drawn to scale. However, in order to illustrate the relative sizes of main equipment and devices such as vessels, columns, heat exchangers etc., these should be depicted in the same scale relationship, wherever possible.
2. Vessels and equipment shall be drawn or depicted large enough so that all required piping connections can be clearly shown.
3. Elevation levels (heights) should only be depicted if this is necessary to improve understanding of the drawing or of technical aspects.
4. Pipelines are not bound to elevation levels.

5.6 Limits

For indication limits in general see Figure 5

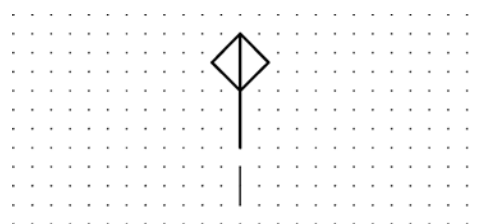


Figure 5

For indication limits of materials, supplier or battery limits see Figure 6.



Key

a Material a; supplier a

b Material b; supplier b

Figure 6

Annex A (informative)

Examples of flow diagrams for process plants

The figures A.1 to A.6 in this annex are only examples of the flow diagrams described in the standard; their technical content is not the subject of this standard.

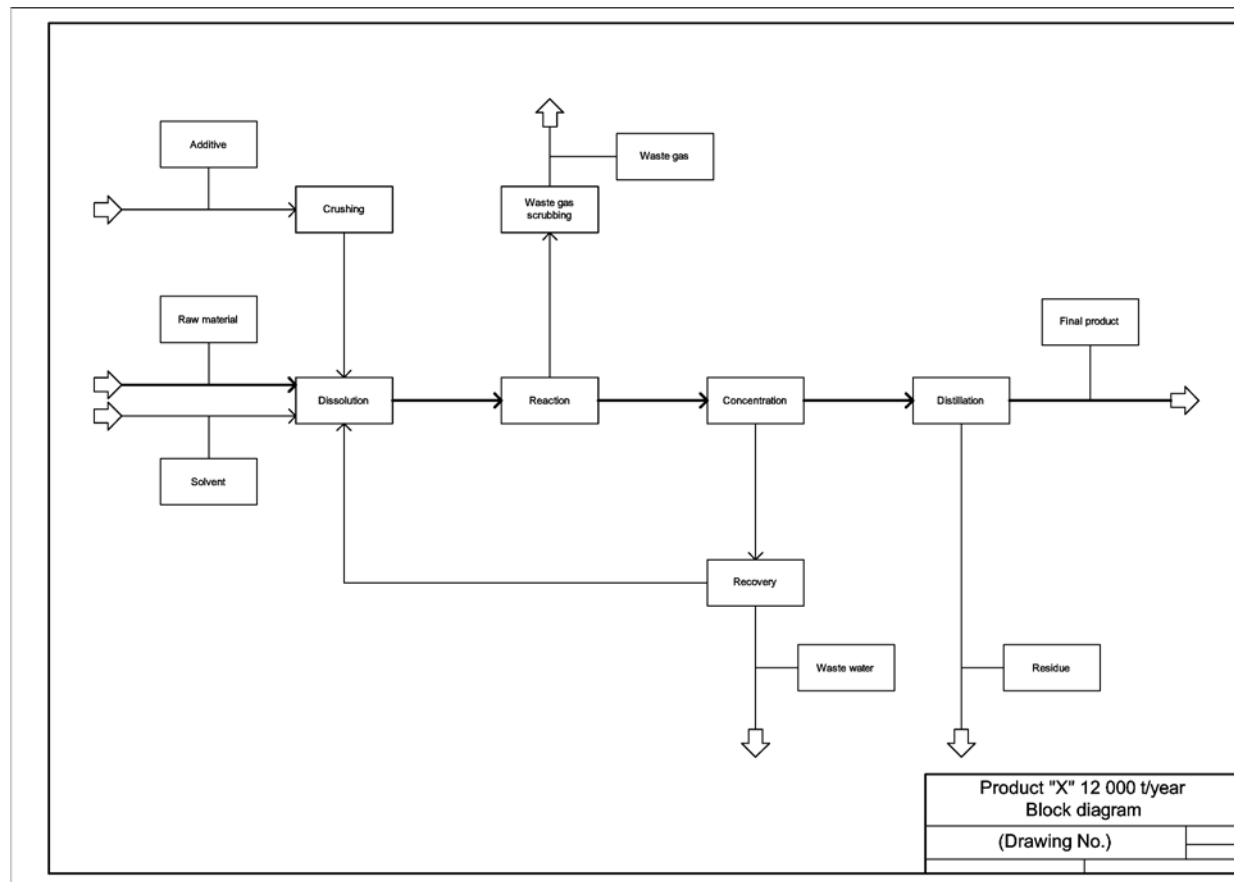


Figure A.1 — Block diagram with basic information


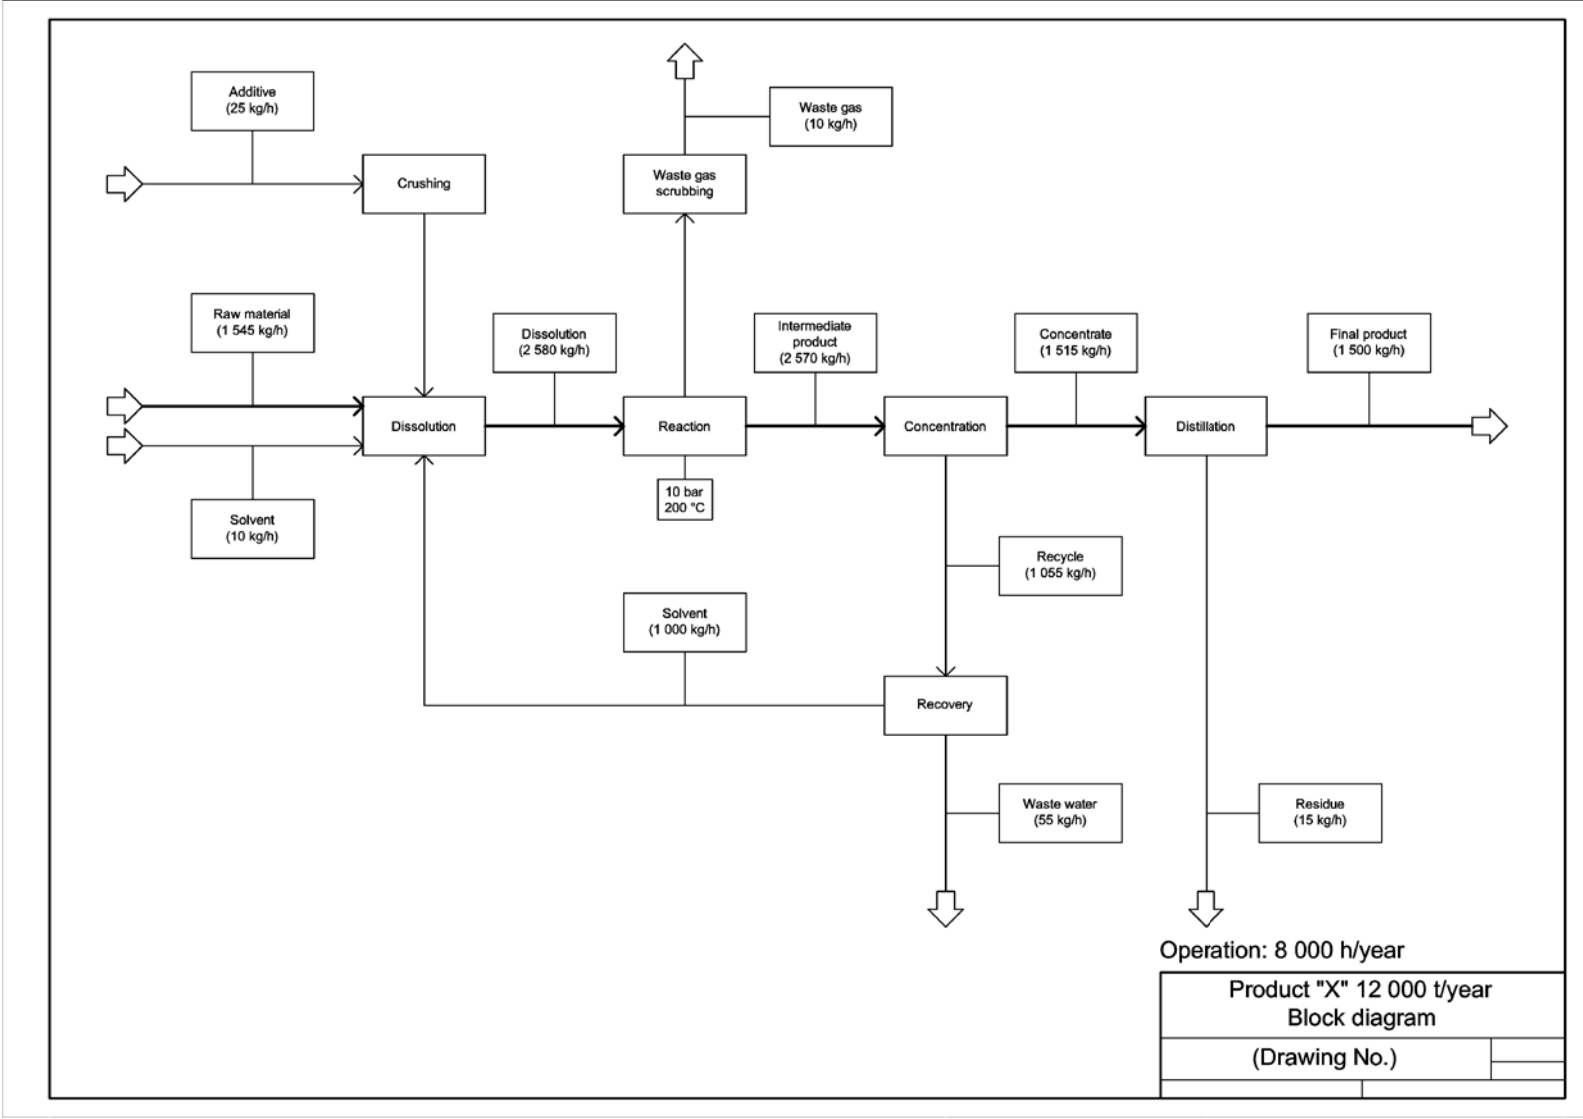


Figure A.2 — Block diagram with basic and additional information

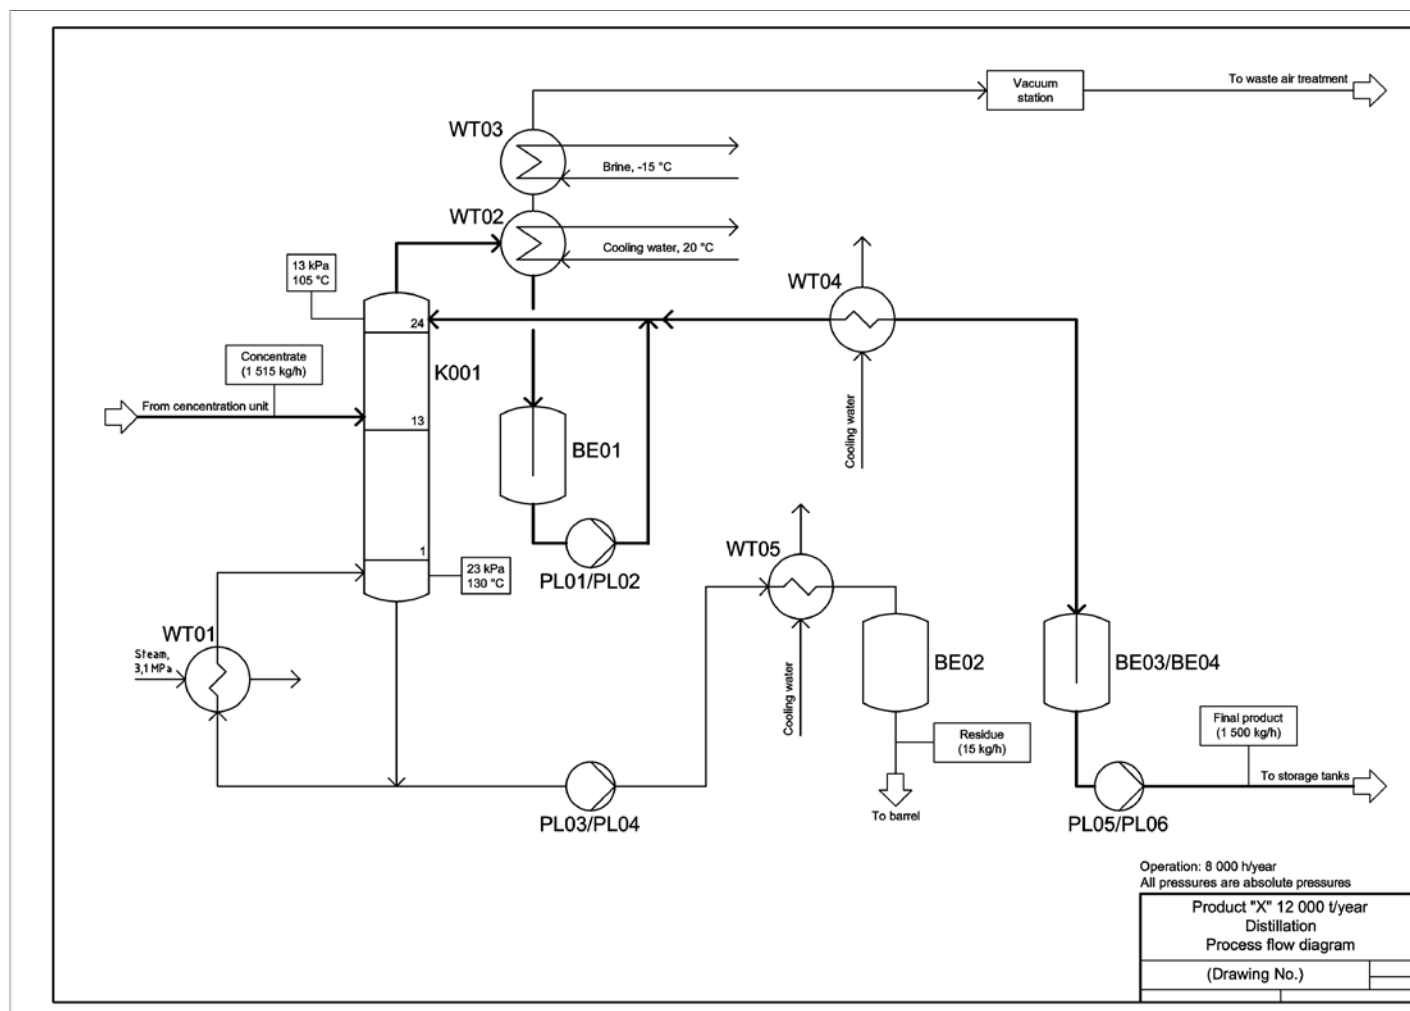

NOTE: Alternative designations for devices and equipment with backup redundancy can be assigned using suffix letters (e.g. PL01 A/B).

Figure A.3 — Process flow diagram with basic information

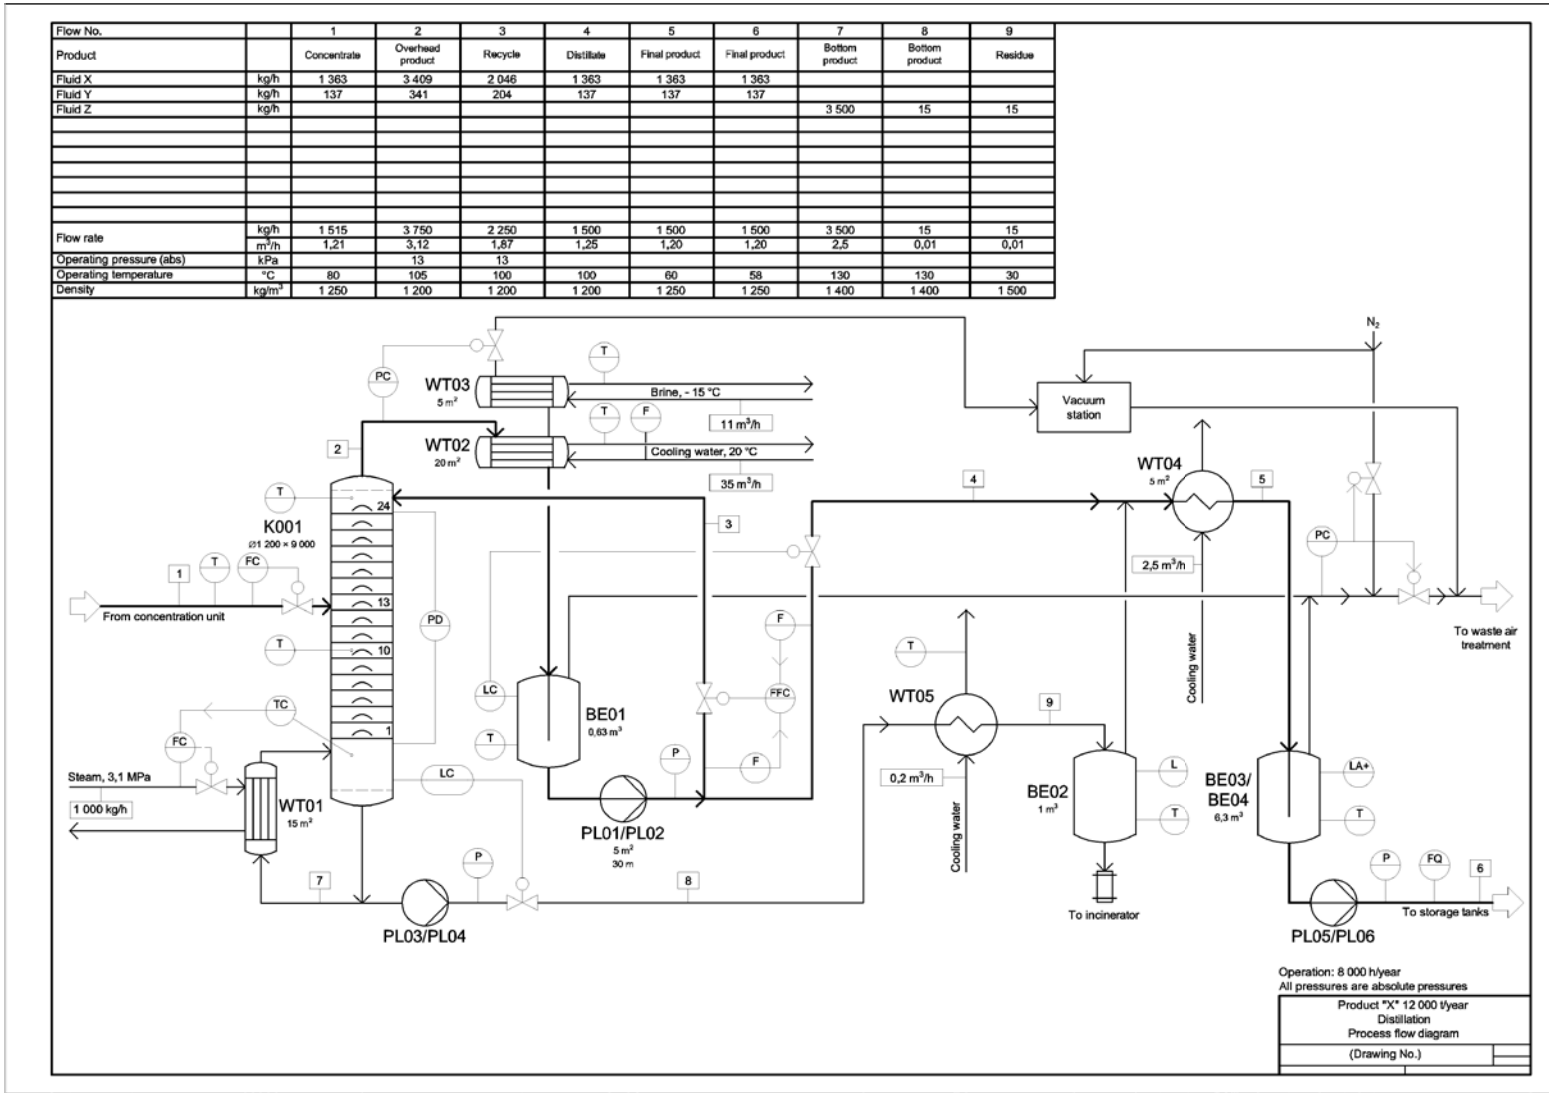


Figure A.4 — Process flow diagram with basic and additional information

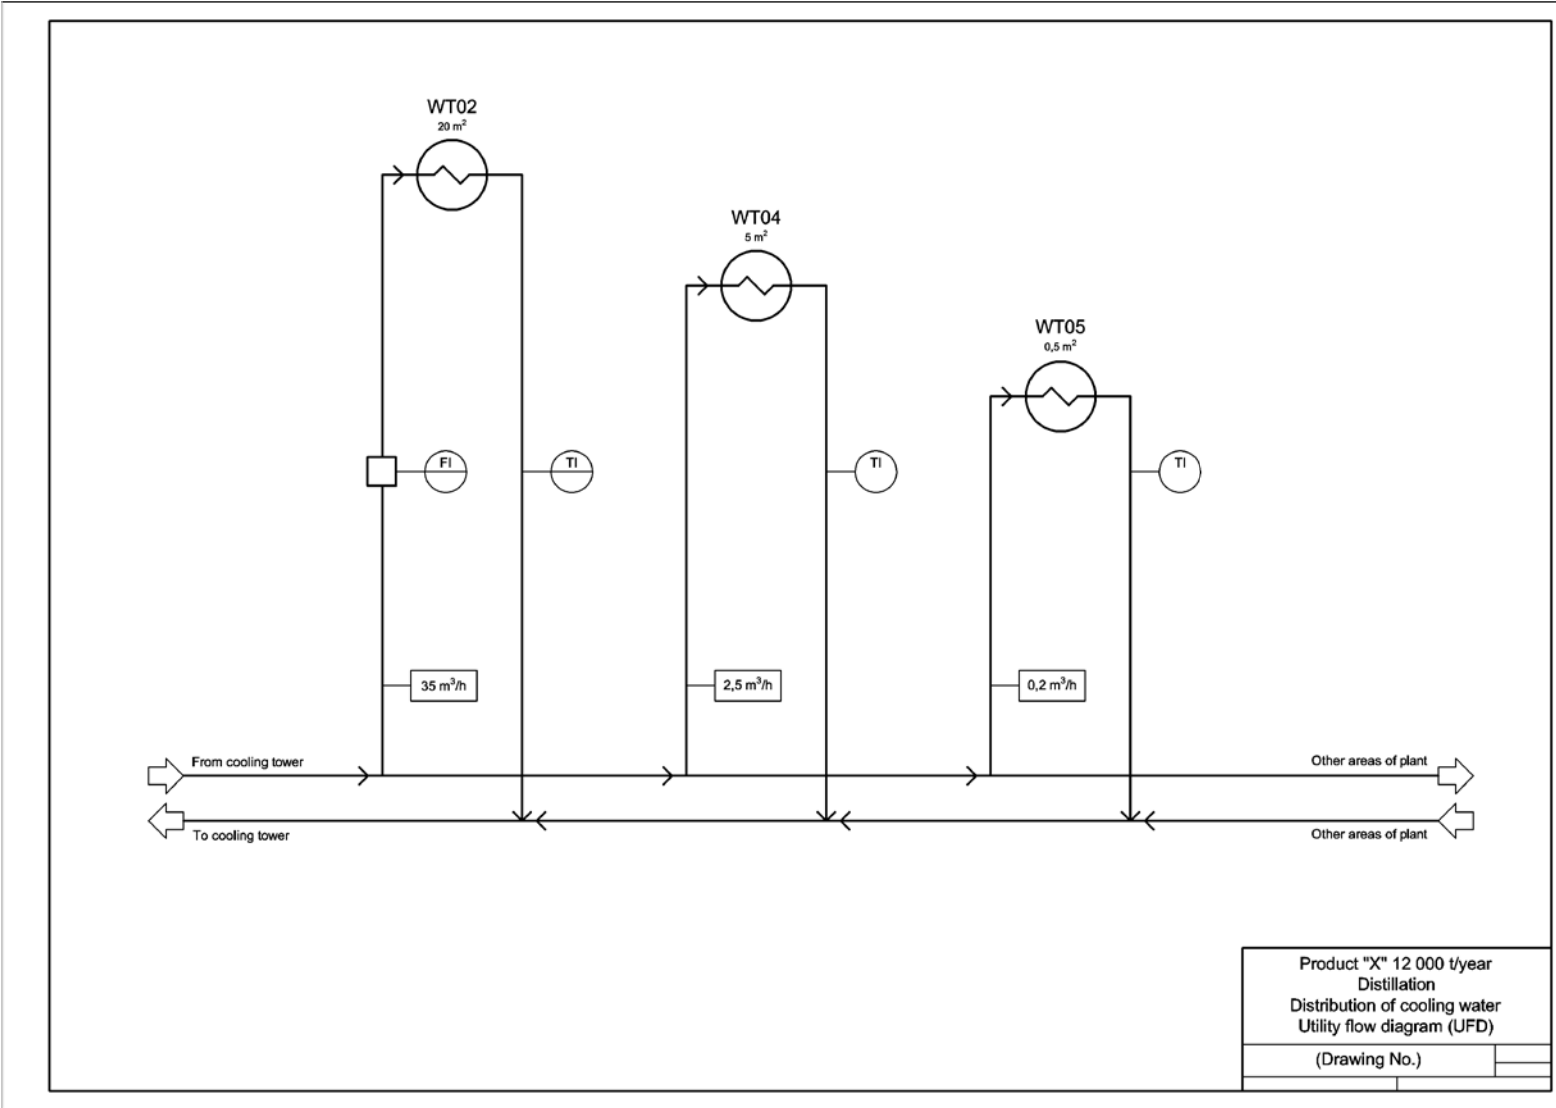


Figure A.5 — Process flow diagram as utility flow diagram (UFD)

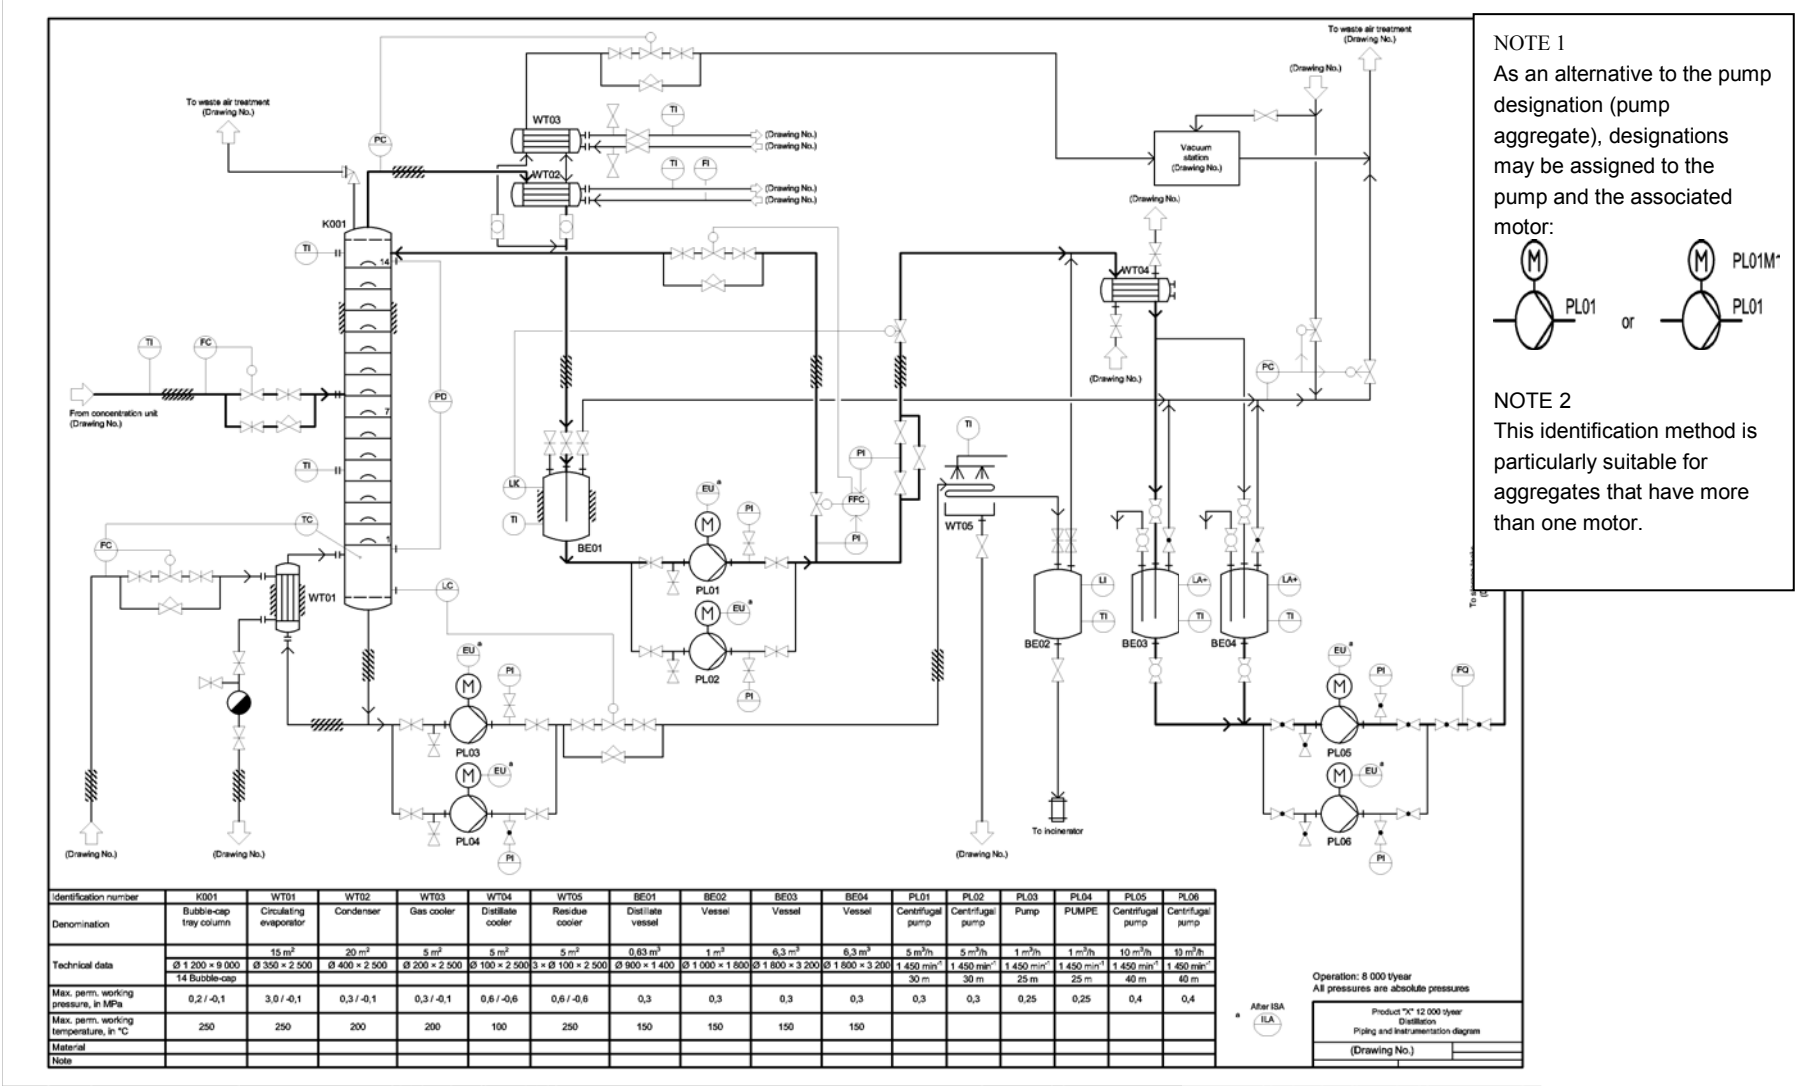


Figure A.6 — Piping and instrumentation diagram (P&ID) with basic information