

इंटरनेट

मानक

Disclosure to Promote the Right To Information

Whereas the Parliament of India has set out to provide a practical regime of right to information for citizens to secure access to information under the control of public authorities, in order to promote transparency and accountability in the working of every public authority, and whereas the attached publication of the Bureau of Indian Standards is of particular interest to the public, particularly disadvantaged communities and those engaged in the pursuit of education and knowledge, the attached public safety standard is made available to promote the timely dissemination of this information in an accurate manner to the public.

“जानने का अधिकार, जीने का अधिकार”

Mazdoor Kisan Shakti Sangathan


“The Right to Information, The Right to Live”

“पुराने को छोड़ नये के तरफ”

Jawaharlal Nehru

“Step Out From the Old to the New”


IS 10712 (1983): Presentation of item references on technical drawings [PGD 24: Drawings]

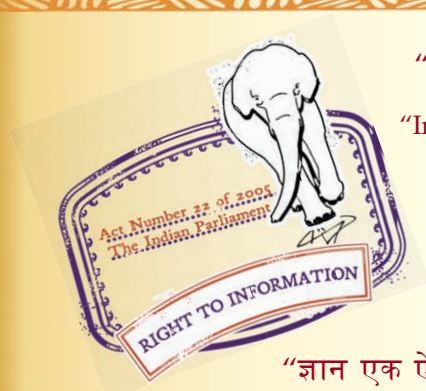

“ज्ञान से एक नये भारत का निर्माण”

Satyanarayan Gangaram Pitroda

“Invent a New India Using Knowledge”

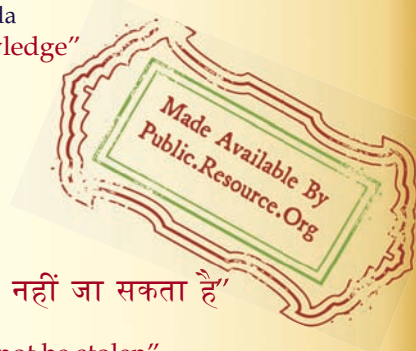

“ज्ञान एक ऐसा खजाना है जो कभी चुराया नहीं जा सकता है”

Bhartrhari—Nitiśatakam

“Knowledge is such a treasure which cannot be stolen”

BLANK PAGE





Indian Standard

(Reaffirmed 1999)

PRESENTATION OF ITEM REFERENCES ON TECHNICAL DRAWINGS

(ISO Title : Technical Drawings — Item References)

National Foreword

This Indian Standard, which is identical with ISO 6433-1981 'Technical drawings — Item references', issued by the International Organization for Standardization (ISO), was adopted by the Indian Standards Institution on recommendation of the Drawings Sectional Committee and approved by the Engineering Division Council.

IS : 696-1972 'Code of practice for general engineering drawings (*second revision*)' was originally issued in 1955 and was revised in 1960 as a consequence of changeover to metric system of weights and measures. The second revision of IS : 696 was carried out in 1972 to bring it more in line with the recommendations published by the Technical Committee TC 10 — Technical Drawing of the International Organization for Standardization.

ISO has published number of standards on various subjects covered in IS : 696-1972. This standard is an adoption of ISO 6433-1981 on the subject superseding the relevant subject matter covered in 1.9 of IS : 696-1972.

Whenever the words 'International Standard' appear, referring to this standard, they should be read as 'Indian Standard'.

Cross Reference

International Standard

ISO 128-1982

ISO 3098/1-1974

ISO 7573-1983

Corresponding Indian Standard

IS : 10714-1983 General principles of presentation on technical drawings
(Identical)

IS : 9609-1983 English lettering for technical drawings
(*first revision*)
(Identical)

IS : 696-1972 Code of practice for general engineering drawings (*second revision*)
(Technically equivalent)

Adopted 16 August 1983

© March 1984, ISI

Gr 2

1 Scope and field of application

This International Standard gives general rules for the application and presentation of item references on technical drawings.

In the context of this International Standard the purpose of item references is restricted to the identification of component parts of assemblies and/or the identification of individual items detailed on the same drawing.

2 References

ISO 128, *Technical drawings — General principles of presentation*.¹⁾

ISO 3098/1, *Technical drawings — Lettering — Part 1: Currently used characters*.

ISO 7573, *Technical drawings — Item list*.²⁾

3 General requirements

3.1 It is recommended that item references be assigned in sequential order to each component part shown in an assembly and/or each detailed item on the drawing.

Identical parts shown in the same assembly shall have the same item reference.

Each complete sub-assembly incorporated in the main assembly shown on the drawing can be identified by a single item reference.

NOTE — If the drawing concerns one part only, it is not necessary to assign an item reference, the drawing number being already an adequate means of identifying the part concerned.

3.2 All item references shall be shown in an item list (see ISO 7573) giving the appropriate information on the items concerned.

4 Presentation

4.1 Item references should generally be composed of arabic numerals only. They may, however, be augmented by capital letters when necessary.

The design, dimensions and spacing of the characters shall comply with ISO 3098/1.

4.2 All item references on the same drawing shall be of the same type and height of lettering. They must be clearly distinguishable from all other indications. This can be achieved for example by :

- a) using characters of a larger height, for example twice the height as used for dimensioning and similar indications;
- b) encircling the characters of each item reference (see figure 3); in that case, the circles shall have the same diameter and be drawn with continuous thin lines (type B of ISO 128);
- c) combining methods a) and b).

4.3 Item references shall be placed outside the general outlines of the items concerned.

Each item reference should be connected to its associated item by a leader line (see figures 1, 2 and 3), the termination of which shall comply with ISO 128.

The leader line may be omitted if the relation between the item reference and its associated item is evident.

Leader lines shall not intersect. They should be kept as short as practicable and generally they should be drawn at an angle to the item reference. In the case of encircled item references, the leader line shall be directed towards the centre of the circle.

1) At present at the stage of draft. (Revision of ISO/R 128-1959.)

2) At present at the stage of draft.




Figure 1




Figure 2



Figure 3

4.4 For the sake of clarity and legibility of the drawing, item references should be arranged preferably in vertical columns and/or horizontal rows (see figure 4).

4.5 Item references of related items may be shown against the same leader line (see figure 4, items, 8, 9, 10 and 11).

4.6 Item references of identical items need only be shown once, provided that there is no risk of ambiguity.

4.7 A distinct sequence for numbering should be adopted :

- according to the possible order of assembly;
- according to the importance of the component parts (sub-assemblies, major parts, minor parts, etc.).
- according to any other logical sequence.

5 Example

An example of the application of item references for an assembly is given in figure 4.

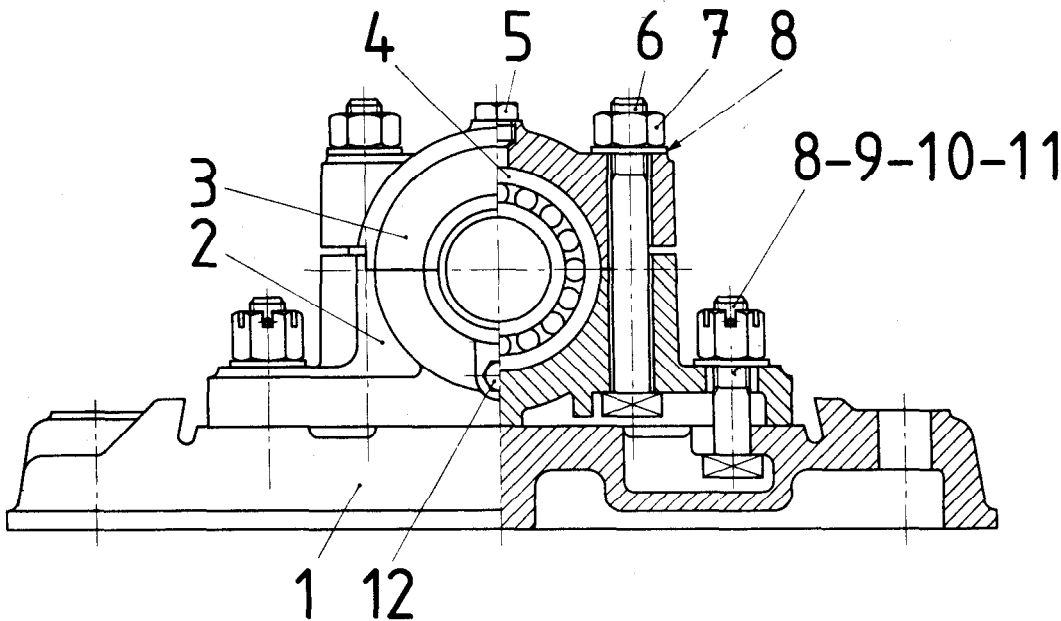


Figure 4