

Issued 1973-04
Revised 2001-06

Superseding J34 DEC1991

Submitted for recognition as an American National Standard

Exterior Sound Level Measurement Procedure for Pleasure Motorboats

- 1. Scope**—This SAE Recommended Practice establishes the procedure for measuring the maximum exterior sound level of pleasure motorboats while being operated under wide open throttle conditions. It is intended as a guide toward standard practice and is subject to change to keep pace with experience and technical advances.
- 2. References**
 - 2.1 Applicable Publication**—The following publication forms a part of this specification to the extent specified herein.
 - 2.1.1 ANSI PUBLICATION**—Available from ANSI, 11 West 42nd Street, New York, NY 10036-8002.

ANSI S1.4-1983—Type 1 Specification for Sound Level Meters
 - 2.2 Related Publications**—The following publications are provided for information purposes only and are not a required part of this document.
 - 2.2.1 ANSI PUBLICATIONS**—Available from ANSI, 11 West 42nd Street, New York, NY 10036-8002.

ANSI S1.1-1960(1976)—Acoustical Terminology
ANSI S1.13-1971(R1986)—Methods for the Measurement of Sound Pressure Levels
ANSI S1.4A-1985—Specifications for Sound Level Meters
- 3. Instrumentation**—The following instrumentation shall be used for the measurement required.
 - 3.1** A sound level meter which meets ANSI Standard S1.4-1983 Type 1 Specification for Sound Level Meters.
 - 3.2** A microphone windscreen that does not affect the overall reading by more than ± 0.5 dB(A).
 - 3.3** A sound level calibrator. (See 5.3.)
 - 3.4** A wind speed anemometer.
 - 3.5** An engine speed tachometer.

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

TO PLACE A DOCUMENT ORDER: +1 (724) 776-4970 FAX: +1 (724) 776-0790
SAE WEB ADDRESS <http://www.sae.org>

4. Procedure

- 4.1 Measurement Site**—A suitable site is the shore of a body of water or a dock projecting out from the shore into the body of water. If the measurement is made from a dock, the dock shall be of open construction so that it presents a minimum of reflecting surfaces. The area around the microphone and boat being measured shall be free of large obstructions or reflective surfaces, such as buildings, high embankments, sea walls, hills, large piers, or breakwaters, etc. for a minimum distance of 30 m (100 ft). Three markers (buoys or posts) shall be placed in line, 50 m (165 ft) apart, to mark the course the boat is to follow while being tested. The site should be set up similar to that shown in Figure 1.

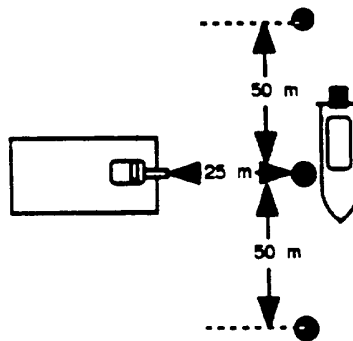


FIGURE 1—MEASUREMENT SITE DIAGRAM

4.2 Boat Operation

- 4.2.1** The boat shall pass all three markers within a distance of 3 m (10 ft) maximum on a straight course at full throttle with the engine operating at the midpoint of the manufacturer's recommended full throttle rpm range.
- 4.2.2** The engine speed tolerance shall be ± 100 rpm if this falls within the recommended full throttle speed range. If a single top speed rpm is recommended, the tolerance shall be $+0, -100$ rpm.
- 4.2.3** For boats with motors or drive systems which are equipped with adjustable trim, the trim angle shall be adjusted so that the propeller thrust is parallel to the plane of the hull.
- 4.2.4** Boats which are sold with the power units installed (e.g., inboards and stern drives) shall be tested in this combination. Outboard motorboats shall be tested with a motor or motors for which the boat is rated.

4.3 Measurements

- 4.3.1** The microphone shall be placed 25 m (82.5 ft) from the line determined by the three markers, normal to the line and opposite the center marker. It shall be positioned 1.2 to 1.5 m (4 to 5 ft) above the water, and no less than 0.6 m (2 ft) above the surface of the shore, dock, or platform. If on a dock or platform the microphone shall be placed near or beyond the end of the dock or platform.
- 4.3.2** The meter shall be set for fast response and the A-weighting network.
- 4.3.3** The observer reading the meter shall not be closer than arm's length from the microphone. Only one other person may be within 15 m (50 ft) of the microphone and that person shall be directly behind the observer reading the meter.

- 4.3.4 The meter shall be observed during the entire pass-by with the boat passing within 0.5 to 1 m (~ 1 to 3 ft) on the far side of all three markers. The applicable reading shall be the highest sound level measured during the pass-by provided that the background sound level is at least 10 dB lower than the boat being measured. A measurement shall be invalid if changes in the background sound level affect the applicable reading. Background sound level includes wind effects, noise from boats other than the one being measured, wave action, boat wakes, and other extraneous noises. Peak readings due to hull slaps which create intermittent sound levels shall be disregarded.
- 4.3.5 Measurements shall be made only when the wind speed is below 19 km/h (13 mph).
- 4.3.6 The observer shall record the applicable reading and the background sound levels taken immediately before and immediately after the applicable reading.
- 4.3.7 At least two measurements shall be made for each side of the boat. The sound level for each side of the boat shall be the average of the first two readings for each side which are within 1 dB of each other. The sound level reported shall be that of the louder side of the boat.

5. General Requirements

- 5.1 The measurements shall be conducted only by persons qualified by training to perform these measurements.
- 5.2 Proper use of all test instrumentation is essential to obtain valid measurements. Operating manuals or other literature furnished by the instrument manufacturer should be consulted for both recommended operation of the instrument and precautions to be observed.
- 5.3 Proper acoustical calibration shall comprise the complete measurement system including extension cables, etc. Field calibration shall be performed immediately before and after each test sequence.
- 5.4 The use of the word "shall" in the procedure is to be understood to be mandatory. The use of the word "should" is to be understood as advisory. The use of the word "may" is to be understood as permissive.

6. Notes

- 6.1 **Marginal Indicia**—The change bar (I) located in the left margin is for the convenience of the user in locating areas where technical revisions have been made to the previous issue of the report. An (R) symbol to the left of the document title indicates a complete revision of the report.

PREPARED BY THE SAE MARINE SOUND LEVEL SUBCOMMITTEE OF THE MARINE TECHNICAL COMMITTEE AND THE SPECIALIZED VEHICLE AND EQUIPMENT DIVISION SOUND LEVEL COMMITTEE



APPENDIX A

- A.1** The intent of this procedure is to provide manufacturers of marine equipment with a standardized set of conditions and method of measurement of the maximum sound level of boats and motors. When performing this procedure, the boat is typically operated at maximum speed at the measurement distance from the shoreline, requiring skilled operators and a quiet, safe location which is devoid of other boat traffic during testing. Background information is included in the Rationale Statement.

SAE J34 Revised JUN2001

Rationale—A revision was made to correct the inadvertent inclusion of the wrong diagram for Figure 1.

Relationship of SAE Standard to ISO Standard—Not applicable.

Application—This SAE Recommended Practice establishes the procedure for measuring the maximum exterior sound level of pleasure motorboats while being operated under wide open throttle conditions. It is intended as a guide toward standard practice and is subject to change to keep pace with experience and technical advances.

Reference Section

ANSI S1.1-1960(1976)—Acoustical Terminology

ANSI S1.4-1983—Type 1 Specification for Sound Level Meters

ANSI S1.4A-1985—Specifications for Sound Level Meters

ANSI S1.13-1981(R1986)—Methods for the Measurement of Sound Pressure Levels

Developed by the SAE Marine Sound Level Subcommittee

Sponsored by the SAE Marine Technical Committee and the Specialized Vehicle and Equipment Division Sound Level Committee