

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space®
INTERNATIONAL

400 Commonwealth Drive, Warrendale, PA 15096-0001

SURFACE VEHICLE STANDARD

SAE J765

**REV.
OCT90**

Issued 1961-04
Revised 1990-10-25

Superseding J765 OCT80

Submitted for recognition as an American National Standard

(R) CRANE LOAD STABILITY TEST CODE

1. SCOPE:

This SAE Standard may be used for all revolving cranes wherein the capacity of the crane to support loads is based on its resistance to overturning. It is not applicable to cranes wherein the capacity of the crane is based on structural strength or available hoisting power.

1.1 Purpose:

The purpose of this test is to determine the maximum capacity of a crane to counterbalance loads applied on its hook block. The capacity of the crane is reported in terms of the load in kilograms (pounds) and its corresponding radius in meters (feet) for a specified position of the upperstructure with respect to the mounting.

2. REFERENCES:

2.1 Applicable Documents:

There are no referenced publications specified herein.

2.2 Definitions:

- 2.2.1 BALANCE POINT:** The condition of crane loading wherein the load moment acting to overturn the crane is equal to the maximum moment of the crane available to resist overturning. On wheel mounted cranes where balance loads are supported over an end of the mounting equipped with free-oscillating dual axles, the balance point, without outriggers set, is determined with the oscillating center of the axles or "bogie axle" functioning as the fulcrum.

SAE Technical Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

SAE J765 Revised OCT90

- 2.2.2 **AXIS OF ROTATION:** A vertical line through the axis around which the crane upperstructure rotates, before load is applied to the crane hook.
- 2.2.3 **LOAD:** The force acting to unbalance a crane; it results from the gravitational force created by hook block and all items suspended from the hook block.
- 2.2.4 **RADIUS OF LOAD:** The horizontal distance from a projection of the axis of rotation to the supporting surface, before loading, to the center of vertical hoist line or tackle with load applied.
- 2.2.5 **SPECIFIED:** The term specified, where used herein, is construed to mean the recommendation of the manufacturer, the user, the testing agency or any agreement between these parties.

3. LIMITATIONS:

These test methods should be used only for those load ratings which are based on stability factors and are not applicable to those ratings which are based on structural competence. The tester should take care to assure that tests are made only in the least stable direction for the rating under test.

4. METHODS:

The load is applied by freely suspending weight of predetermined magnitude and adjusting its position horizontally.

5. FACILITIES:

5.1 Apparatus and Materials:

- 5.1.1 A concrete or other firm supporting surface, sufficiently large to provide for unobstructed accomplishment of the tests required.
- 5.1.2 Means for determining the load radius to an accuracy of $\pm 1\%$, not to exceed 0.15 m (6 in).
- 5.1.3 Tire Pressure Gage: Accuracy $\pm 3\%$ of measured pressure.
- 5.1.4 Means for projecting the crane axis of rotation to the test course surface.
- 5.1.5 Means for measuring the horizontal distance from the axis of rotation to the center of gravity of the load.
- 5.1.6 Means for determining the weight of test weights, hook block slings, and other auxiliary equipment: accuracy $\pm 1/2\%$ of measured load.
- 5.1.7 Test weights and lifting apparatus of known weight, accurate to within $\pm 1\%$.

SAE J765 Revised OCT90

6. PROCEDURE:

6.1 Set Up:

6.1.1 Service and adjust the crane as applicable to assure specified conditions of:

- a. Lubrication
- b. Fuel supply
- c. Tire inflation
- d. Coolant supply
- e. Track tension
- f. Bolts, pins, cable fittings, and other load bearing components
- g. Clutches, brakes, and other power transmission components
- h. Boom length and rigging
- j. Crane level to within a 1% grade

6.1.2 Operate the crane under partial load sufficiently long to assure operator proficiency and proper machine function. In the absence of specific recommendations, a new machine should be operated for at least 4 h. Service and adjust the machine to specified tolerances at conclusion of this initial operation.

6.1.3 Locate the crane on the test course in position for loading and lock the travel brakes.

6.1.4 Set outriggers, if used, and jack the crane to a position where the tires or tracks within the boundary of the outriggers are unloaded.

6.1.5 Vertically project the upperstructure axis-of-rotation to the surface of the test course and mark its location.

6.2 Test Methods:

6.2.1 Prepare test load including test weights, hook block, slings, and other auxiliary equipment, such as load basket, that make up the specified load weight within $\pm 1\%$. Record this value.

6.2.2 With the crane upperstructure in the specified position, hoist the load free of test surface at a radius where the crane is stable; then boom down a small amount to increase the radius. Keep the load within 0.1 m (3.9 in) of the test surface at all times to prevent excessive tipping. If the crane will support the load at the adjusted radius, measure and record the new radius. Repeat the procedure until the balance point is reached. The balance point on outriggers is exceeded when the radius continues to increase with no corresponding boom movement. The final adjustment of the balance point may be made by adding small increments of weight rather than increasing the radius. When the balance point is reached, the load and radius of the crane shall be recorded.

SAE J765 Revised OCT90

6.2.3 Alternately measure the radius of load and add a 10 lb increment to the load until the load overcomes the stability of the crane. The radius of load and load weight last obtained, before the load overcame the stability of the crane, shall be recorded as the balance point condition.

6.2.4 Wind direction should be such that it does not increase the stability of the crane.

7. COMPUTATIONS AND RECORDS:

7.1 Capacity Curve:

Where it is desired to determine the balance point capacity of a crane throughout a range of loads or radii, follow procedures as outlined for individual determinations, making sure that load and radius are determined for each extreme of the range and at a sufficient number of intermediate points to permit plotting a curve. Plot a curve showing the maximum capacity of the crane with the load in kilograms (pounds) as ordinate and radii in meters (feet) as abscissa. Use a representative number of boom lengths for a given capacity chart.

7.2 Test Records:

Record a description of the crane, positions for test, load data, and radius of load data on the Physical Dimensions Test Summary sheets (see Figures 1, 2, and 3).

The (R) is for the convenience of the user in locating areas where technical revisions have been made to the previous issue of the report. If the symbol is next to the report title, it indicates a complete revision of the report.

SAE J765 Revised OCT90

CRANE LOAD STABILITY TEST SUMMARY

Testing Agency _____ Location _____
 Make _____ Model _____ Serial No. _____
 Condition: New _____ Used _____ Hours _____
 Mounting: Type _____ Size _____
 Tire: Size _____ Ply _____ Pressure (PSI) _____
 Booms: Type _____ Length (Ft.) _____
 Boom Jib: Type _____ Length (Ft.) _____ Angle to Boom _____
 Engine: Make _____ Model _____ Serial No. _____
 Counterweight: Type _____ Lb. _____
 Test Method: Suspended Weights _____ Anchor _____

BALANCE POINTS

POSITION OF SUPERSTRUCTURE	WITHOUT OUTRIGGERS		WITH OUTRIGGERS	
	Load (Lb.)	Radius (Ft.)	Load (Lb.)	Radius (Ft.)


Remarks: _____

Test Engineer _____ Date of Test _____


FIGURE 1 - Page 1 of Test Summary

SAE J765 Revised OCT90

PHYSICAL DIMENSIONS TEST SUMMARY

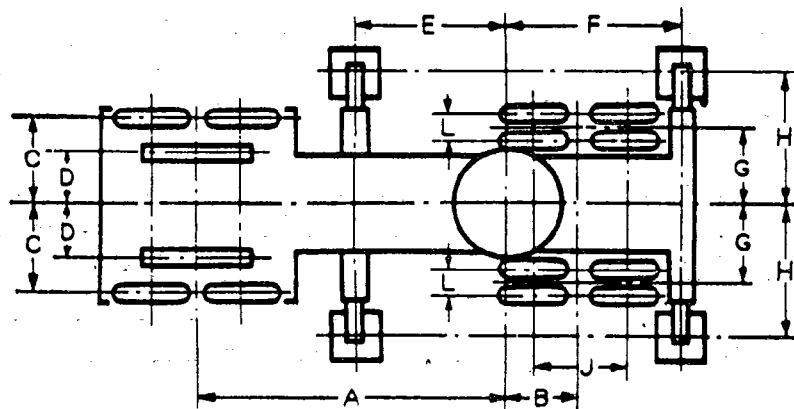

6 X 4 TRUCK

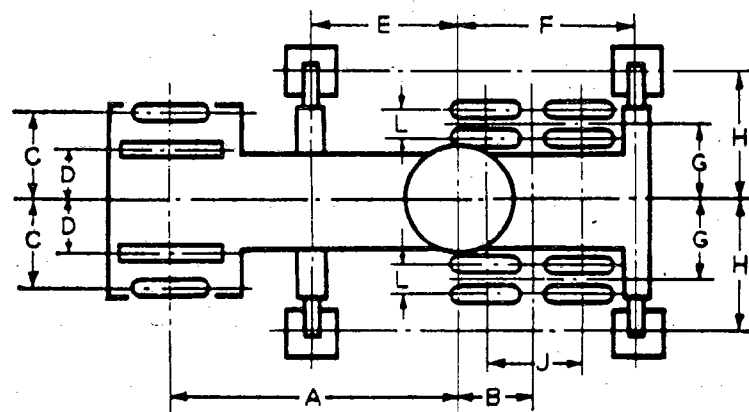

6 X 4 TRUCK

TRUCK MOUNTED

A _____	B _____	C _____
D _____	E _____	F _____
G _____	H _____	J _____
K _____	L _____	

Diagrams shown are examples,
actual configuration may vary.

FIGURE 2 - Page 2 of Test Summary

SAE J765 Revised OCT90

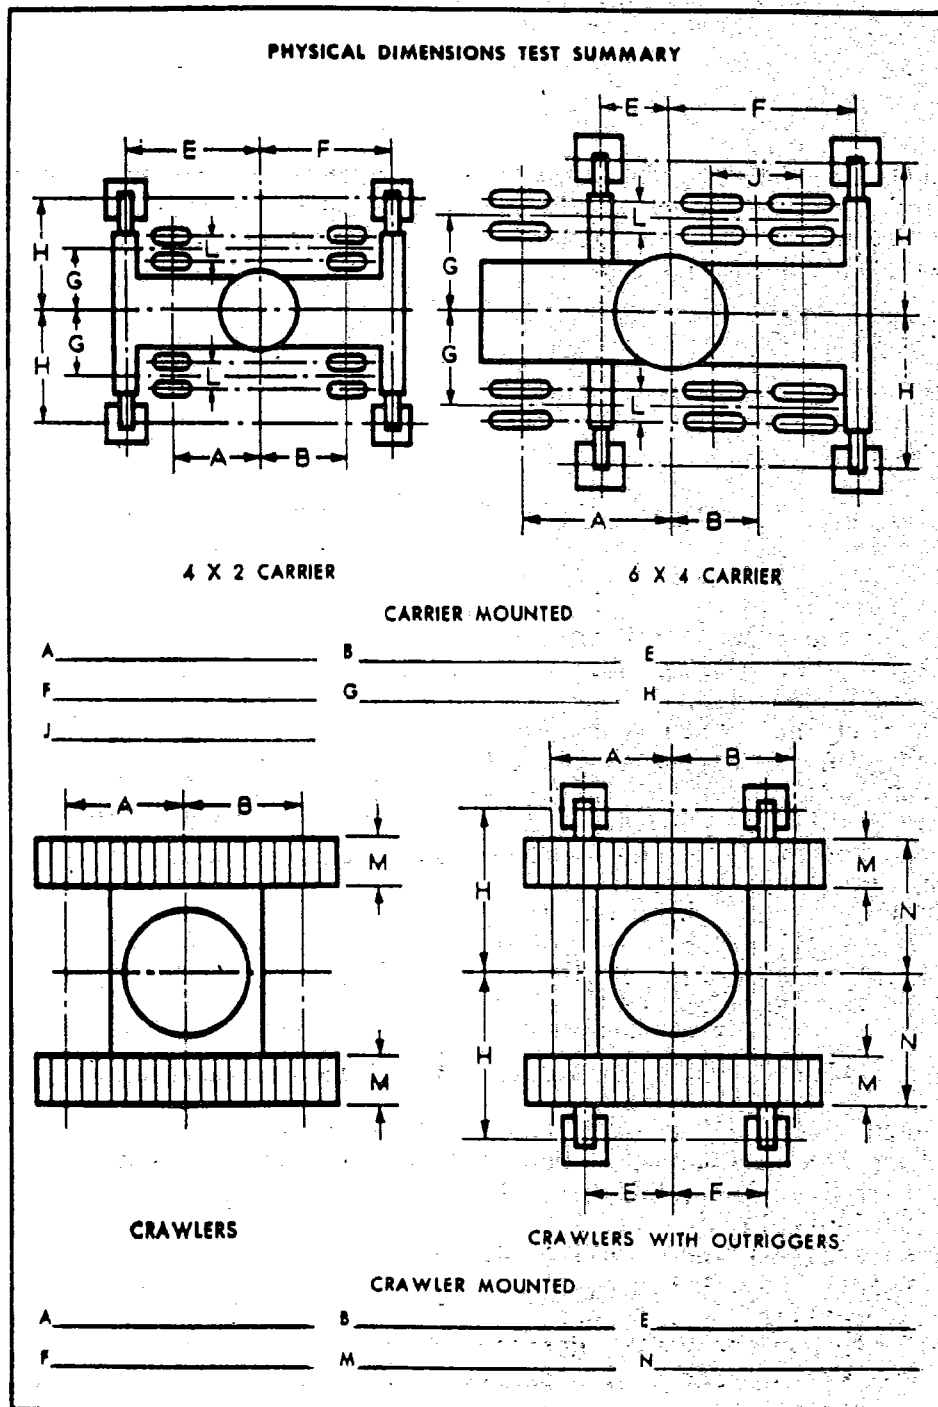


FIGURE 3 - Page 3 of Test Summary

J765 OCT90RATIONALE:

Not applicable.

RELATIONSHIP OF SAE STANDARD TO ISO STANDARD:

Not applicable.

APPLICATION:

This SAE Standard may be used for all revolving cranes wherein the capacity of the crane to support loads is based on its resistance to overturning. It is not applicable to cranes wherein the capacity of the crane is based on structural strength or available hoisting power.

REFERENCE SECTION:

Not applicable.

COMMITTEE COMPOSITION:DEVELOPED BY THE SAE OFF-ROAD MACHINERY TECHNICAL COMMITTEE - SUBCOMMITTEE 32:

C. W. Formwalt, Jr., Deere & Co., Waterloo, IA - Chairman
 W. Brandt, Caterpillar Inc., Peoria, IL - Vice Chairman
 J. R. Barr, Ryder Truck Rental, Miami, FL
 R. R. Brubaker, Komatsu Dresser Co., Peoria, IL
 R. A. Cherry, Ford New Holland, Troy, MI
 M. J. Eagan, Dixon Inc., Grand Junction, CO
 R. Heiser, Sundstrand Hydrotransmission, Minneapolis, MN
 R. J. Henry, Komatsu Dresser Co., Libertyville, IL
 G. J. Hill, Payhauler Corp., Batavia, IL
 K. D. Kobelentz, Robert Bosch GmbH, Broadview, IL
 R. Koenig, GMC, Indianapolis, IN
 B. M. Nichols, Deere & Co., Dubuque, IA
 W. L. Phelps, Caterpillar Inc., Peoria, IL
 B. Rosolowski, VME Construction Equip. Group NV, Cleveland, OH
 E. J. Wynn, Budd Co., Salinas, CA

SPONSORED BY THE OFF-ROAD MACHINERY TECHNICAL COMMITTEE:

G. H. Ritterbusch, Caterpillar Inc., Peoria, IL - Chairman
 R. L. Sierk, Ford New Holland Inc., New Holland, PA - Vice Chairman
 J. R. Barr, Caterpillar Inc., Decatur, IL
 J. B. Codlin, Springfield, IL
 J. R. Cryder, Caterpillar Inc., Joliet, IL
 R. Eichhorst, Deere & Co., Dubuque, IA
 B. Griffith, Caterpillar Inc., Aurora, IL
 P. Haag, John Deere Horicon Works, Horicon, WI
 D. L. Karlak, Komatsu Dresser Co., Libertyville, IL
 L. E. Kendrick, Caterpillar Inc., Peoria, IL
 S. L. Kershaw, Caterpillar Inc., Decatur, IL
 K. D. Kobelentz, Robert Bosch GmbH, Broadview, IL
 J. W. McCollum, Caterpillar Inc., Peoria, IL
 R. J. Nelissen, Deere & Co., Dubuque, IA
 G. Nelson, Marathon Le Tourneau, Longview, TX

This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user.

PRINTED IN U.S.A.