


ANSI/ISA-75.11-1985 (R1997)

Formerly ISA-S75.11-1985 (R1997)



Inherent Flow Characteristic and Rangeability of Control Valves

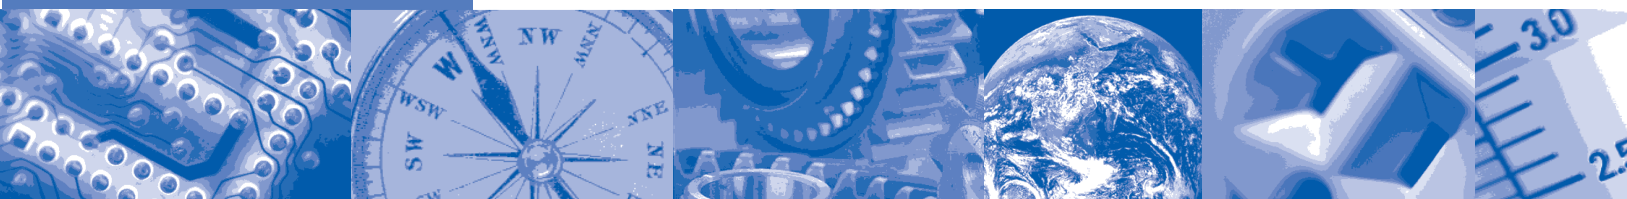

**ISA—The Instrumentation,
Systems, and
Automation Society**

Approved 15 June 2000

ANSI/ISA-75.11-1985 (R1997) — Inherent Flow Characteristic and Rangeability of Control Valves

ISBN 0-87664-835-9

Copyright © 1985 by the Instrument Society of America. All rights reserved. Printed in the United States of America. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any means (electronic, mechanical, photocopying, recording, or otherwise), without the prior written permission of the publisher.

ISA
67 Alexander Drive
P.O. Box 12277
Research Triangle Park, North Carolina 27709

Preface

This preface is included for information purposes and is not part of ANSI/ISA-75.11-1985 (R1997).

This standard has been prepared as part of the service of ISA toward a goal of uniformity in the field of instrumentation. To be of real value, this document should not be static, but should be subject to periodic review. Toward this end, the Society welcomes all comments and criticisms, and asks that they be addressed to the Secretary, Standards and Practices Board, ISA, 67 Alexander Drive, P.O. Box 12277, Research Triangle Park, NC 27709, Telephone (919) 549-8411, e-mail: standards@isa.org.

The ISA Standards and Practices Department is aware of the growing need for attention to the metric system of units in general, and the International System of Units (SI) in particular, in the preparation of instrumentation standards. The Department is further aware of the benefits to U.S.A. users of ISA standards of incorporating suitable references to the SI (and the metric system) in their business and professional dealings with other countries. Toward this end, this Department will endeavor to introduce SI-acceptable metric units in all new and revised standards to the greatest extent possible. *The Metric Practice Guide*, which has been published by the Institute of Electrical and Electronic Engineers as ANSI/IEEE Std. 268-1982, and future revisions will be the reference guide for definitions, symbols, abbreviations, and conversion factors.

It is the policy of the ISA to encourage and welcome the participation of all concerned individuals and interests in the development of ISA standards. Participation in the ISA standards-making process by an individual in no way constitutes endorsement by the employer of that individual, of ISA, or of any of the standards that ISA develops.

Prior to the issuance of this standard, there had been no standard which provided allowable deviations for control valve flow characteristics and which established criteria for rangeability of control valves.

In contrast to conventional globe valves, most rotary motion control valve types such as ball valves, butterfly valves, or plug valves do not have a mathematically definable flow characteristic. The users of control valves, therefore, have to depend on the manufacturer to state the specific flow characteristic for a given style or size of valve either in graphic or tabular form. For sake of consistency, this method of presentation was also adapted for generic flow characteristics such as "equal-percentage" or "linear."

This standard states the limits within which a stated flow characteristic can be expected to be reproducible. Knowledge of specific flow coefficients (within allowable deviations) at stated travel positions will enable the user to calculate the installed flow characteristic for a specific control system.

The stated inherent rangeability of a specific control valve is related solely to the interaction between the closure member and the flow control orifice of a valve. This given value may not be applicable when the control valve is installed. Other factors such as the positioning accuracy of the actuator or the effects of hydraulic, flow resistance of associated piping have to be considered when deriving the installed rangeability for a specific application.

The following individuals served as members of ISA Subcommittee SP75.11, which prepared this standard:

NAME	COMPANY
H. D. Baumann, Chairman	H.D. Baumann Assoc., Ltd.
M. Hellman, Secretary	Cashco, Inc.
J. B. Arant	E.I. du Pont de Nemours and Company, Inc.
H. Boger	Masoneilan Division, McGraw-Edison Co.
P. S. Buckley	E.I. du Pont de Nemours and Company, Inc.
J. F. Buresh	Retired
C. L. Crawford	Union Carbide Company
G. Keith (Alternate Member)	Masoneilan Division, McGraw-Edison Co.
R. E. Pfeiffer	Union Carbide Company
F. G. Shinsky	The Foxboro Company
J. M. Simonsen	Valtek, Inc.
G. Stiles	Retired
R. E. Terhune	Exxon Company, U.S.A.
S. Weiner	Monsanto Company
P. J. Schafbuch	Fisher Controls International, Inc.

The following people served as members of ISA Committee SP75:

NAME	COMPANY
L. R. Driskell, Chairman	Consultant
J. B. Arant	E.I. du Pont de Nemours and Company, Inc.
H. E. Backinger	John F. Kraus & Company
G. Barb	Muesco, Inc.
H. D. Baumann	H. D. Baumann Assoc., Ltd.
C. S. Beard	
N. Belaef	
G. Borden	Bechtel Power Corporation
D. E. Brown	R. Conrader Company
E. H. C. Brown	Dravo Engineers, Inc.
E. C. Cooney	Air Products & Chemicals, Inc.
W. G. Dewart	Rockwell International
J. T. Emery	Honeywell, Inc.
H. J. Fuller	Worcester Controls Corporation
L. Griffith	
A. J. Hanssen	Fluid Controls Institute, Inc.
F. P. Harthun	Fisher Controls
H. P. Illing	Kieley & Mueller, Inc.
R. B. Jones	Upjohn Company
M. W. Kaye	M. W. Kellogg Company
R. Louvere	Creole
O. P. Lovett, Jr.	ISIS Corporation

J. Manton	Chagrin Valley Controls, Inc.
A. P. McCauley	Pacific Gas & Electric
T. V. Molloy	Leslie Company
J. T. Muller	Resistoflex Company
H. R. Nickerson	Omaha Public Power
J. Ozol	Walsh Inc.
R. A. Quance	Colorado State University
W. Rahmeyer	Masoneilan
J. N. Reed	Jordan Valve
G. Richards	Rawson Company
J. Rosato	Con-Tek
K. Schoonover	Flexible Valve Corporation
H. Schwartz	Willis Oil Tool Company
F. O. Seger	Valtek, Inc.
J. M. Simonsen	ITT Grinnell Corporation
H. Sonderregger	DeZurik
N. Sprecher	Retired
R. U. Stanley	Fisher Controls Company
G. F. Stiles	Exxon Company USA
R. Terhune	Copes-Vulcan
R. F. Tubbs	Gilbert Commonwealth
W. C. Weidman	Cashco, Inc.
R. L. Widdows	Retired
P. Wing	Union Carbide
L. Zinck	

This standard was approved for publication by the ISA Standards and Practices Board in July 1984.

NAME	COMPANY
W. Calder III, Chairman	The Foxboro Company
P. V. Bhat	Monsanto
N. L. Conger	Conoco
B. Feikle	Bailey Controls Company
H. S. Hopkins	Westinghouse Electric Company
J. L. Howard	Boeing Aerospace Company
R. T. Jones	Philadelphia Electric Company
R. Keller	The Boeing Company
O. P. Lovett, Jr.	ISIS Corporation
E. C. Magison	Honeywell, Inc.
A. P. McCauley	Chagrin Valley Controls, Inc.
J. W. Mock	Bechtel Corporation
E. M. Nesvig	ERDCO Engineering Corporation
R. Prescott	Moore Products Company
D. Rapley	Stearns Catalytic Corporation
W. C. Weidman	Gilbert Commonwealth
K. A. Whitman	Allied Chemical Corporation
P. Bliss*	Pratt & Whitney
B. A. Christensen*	Continental Oil Company
L. N. Combs*	
R. L. Galley*	
T. J. Harrison*	IBM Corporation
R. G. Marvin*	
W. B. Miller*	Moore Products Company
G. Platt*	Bechtel Power Corporation
J. R. Williams*	Stearns Catalytic Corporation

*Director Emeritus

Contents

1 Scope	9
2 Basic definitions	9
2.1 Terminology	9
2.2 Flow coefficient	9
2.3 Inherent flow characteristic	9
2.4 Inherent rangeability	9
2.5 Relative flow coefficient (ϕ)	9
2.6 Relative travel (h)	9
3 Typical inherent flow characteristics	10
4 Permissible deviations between actual and manufacturer-stated inherent flow characteristics	10

1 Scope

The scope of this standard is to define the statement of typical control valve inherent flow characteristics and inherent rangeabilities, and to establish criteria for adherence to manufacturer-specified flow characteristics.

2 Basic definitions

2.1 Terminology

Basic terminology used herein is based on definitions stated in "Control Valve Terminology" ISA Standard S75.05.

2.2 Flow coefficient

A constant (C_v), related to the geometry of a valve, for a given valve opening, that can be used to predict flow rate. See ANSI/ISA S75.01 "Control Valve Sizing Equations" and ANSI/ISA S75.02 "Control Valve Capacity Test Procedure."

2.3 Inherent flow characteristic

The relationship between the flow rate through a valve and the travel of the closure member as the closure member is moved from the closed position to rated travel with constant pressure drop across the valve.

2.4 Inherent rangeability

The ratio of the largest flow coefficient (C_v) to the smallest flow coefficient (C_v) within which the deviation from the specified inherent flow characteristic does not exceed the limits stated in [Section 4](#).

2.5 Relative flow coefficient (ϕ)

The ratio of the flow coefficient (C_v) at a stated travel to the flow coefficient (C_v) at rated travel.

2.6 Relative travel (h)

The ratio of the travel at a given opening to the rated travel.

3 Typical inherent flow characteristics

3.1 The typical inherent flow characteristic for a specific size, type, and trim configuration of a control valve shall be specified by the manufacturers either graphically or in tabular form.

3.2 When tabulated, specific flow coefficients shall be stated for the following travel positions: at 5%, 10%, 20%, and every subsequent 10% of rated travel up to and including 100%.

3.3 The manufacturer may publish flow coefficients in addition to those at the above-stated travel positions.

3.4 In addition, the manufacturer is encouraged to specify the generic name of a specific flow characteristic such as "Linear," "Equal-Percentage," etc., if applicable, following the definitions in ISA Standard S75.05.

3.5 The manufacturer shall state the largest flow coefficient that meets the criteria of [Section 4](#) if it is less than the rated flow coefficient. (See [Figure 2](#).)

4 Permissible deviations between actual and manufacturer-stated inherent flow characteristics

4.1 When subjected to a flow test per ANSI/ISA S75.02, the individual test C_v values may not deviate by more than $\pm 10 \{1/\phi\}^{0.2}$ percent from those values specified in the flow characteristic published by the manufacturer. Exceptions of this are C_v s at given travel positions falling below a C_v value of 5, or above a C_v value of $30d^2$. In the above relationships, d is the nominal valve size in inches, and ϕ is the relative flow coefficient based on published C_v s. Allowable deviations calculated by the above equation are listed in [Table 1](#).

Table 1 — Permissible deviations between actual and manufacturer-stated inherent flow characteristics

% C_v Rated	ϕ	Permitted +/- Deviation (%)	ϕ Range	
			High	Low
5	0.05	18.2	0.0591	0.0409
10	0.1	15.8	0.116	0.0842
20	0.2	13.8	0.227	0.172
30	0.3	12.7	0.338	0.262
40	0.4	12.0	0.448	0.352
50	0.5	11.5	0.557	0.443
60	0.6	11.1	0.667	0.533
70	0.7	10.7	0.775	0.625
80	0.8	10.4	0.883	0.717
90	0.9	10.2	0.992	0.808
100	1.0	10.0	1.100	0.900

4.2 The inherent flow characteristic of a control valve, when plotted from test data at the stated increments of travel, shall show no major deviations in slope. By definition, a major deviation is when the slope of the line connecting two adjacent test points varies by more than 2 to 1 or 0.5 to 1 from the slope of a line drawn between flow coefficients specified by the manufacturer for the same travel positions. (See Figure 1.)


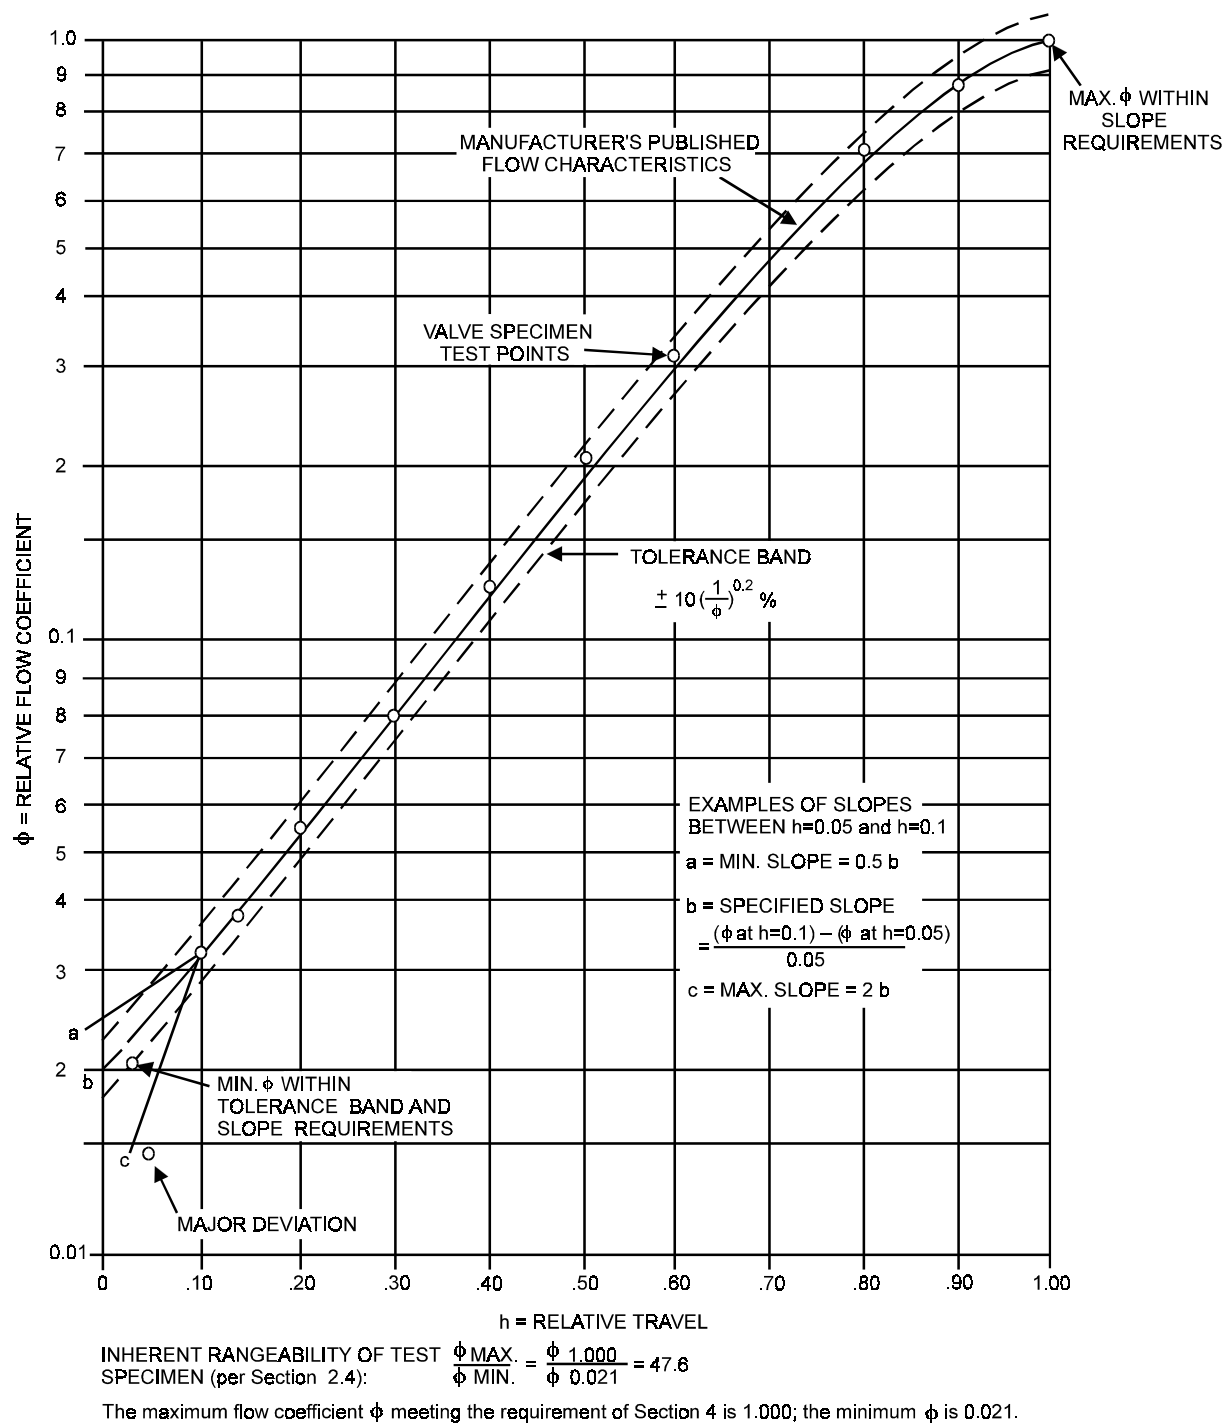


Figure 1 — Example of globe valve specimen compared to manufacturer-specified flow characteristic

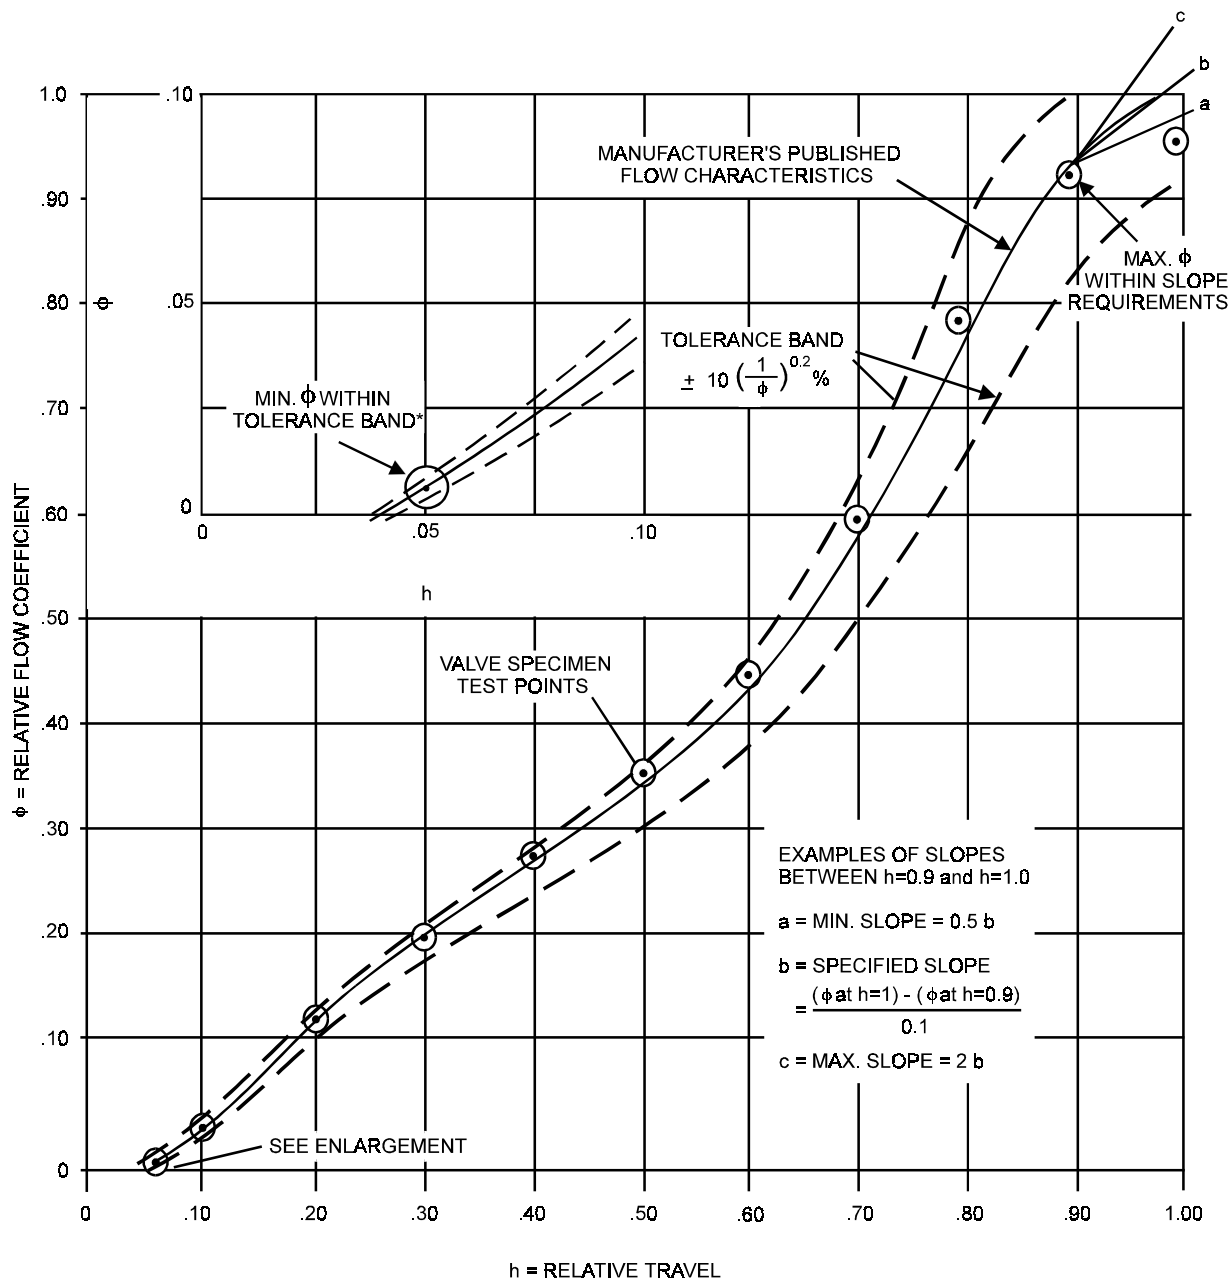

INHERENT RANGEABILITY OF TEST SPECIMEN (per Section 2.4):

$$\frac{\phi \text{ MAX.}}{\phi \text{ MIN.}} = \frac{\phi \text{ 0.91}}{\phi \text{ 0.01}} = 91$$

The maximum flow coefficient ϕ meeting the requirements of Section 4 is 0.91; the minimum ϕ is 0.01.

*Tolerance band for $\phi = 0.01$ is $10 \left\{ \frac{1}{0.01} \right\}^{0.2} = \pm 25\%$ of $\phi = 0.01$.

Figure 2 — Example of butterfly valve specimen compared to manufacturer-specified flow characteristic

Developing and promulgating technically sound consensus standards, recommended practices, and technical reports is one of ISA's primary goals. To achieve this goal the Standards and Practices Department relies on the technical expertise and efforts of volunteer committee members, chairmen, and reviewers.

ISA is an American National Standards Institute (ANSI) accredited organization. ISA administers United States Technical Advisory Groups (USTAGs) and provides secretariat support for International Electrotechnical Commission (IEC) and International Organization for Standardization (ISO) committees that develop process measurement and control standards. To obtain additional information on the Society's standards program, please write:

ISA
Attn: Standards Department
67 Alexander Drive
P.O. Box 12277
Research Triangle Park, NC 27709

ISBN: 0-87664-835-9