

इंटरनेट

मानक

Disclosure to Promote the Right To Information

Whereas the Parliament of India has set out to provide a practical regime of right to information for citizens to secure access to information under the control of public authorities, in order to promote transparency and accountability in the working of every public authority, and whereas the attached publication of the Bureau of Indian Standards is of particular interest to the public, particularly disadvantaged communities and those engaged in the pursuit of education and knowledge, the attached public safety standard is made available to promote the timely dissemination of this information in an accurate manner to the public.

“जानने का अधिकार, जीने का अधिकार”

Mazdoor Kisan Shakti Sangathan


“The Right to Information, The Right to Live”

“पुराने को छोड़ नये के तरफ”

Jawaharlal Nehru

“Step Out From the Old to the New”

IS 9609-6 (2001): Technical Product Documentation - Lettering, Part 6: Cad Lettering of the Latin Alphabet, Numerals and Marks [PGD 24: Drawings]

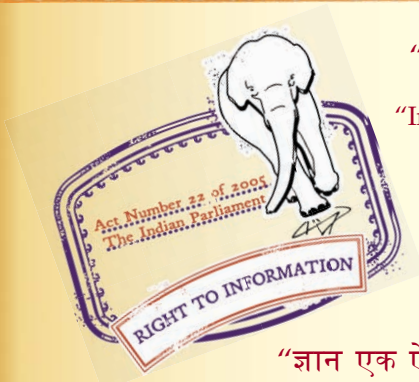

“ज्ञान से एक नये भारत का निर्माण”

Satyanarayan Gangaram Pitroda

“Invent a New India Using Knowledge”



“ज्ञान एक ऐसा खजाना है जो कभी चुराया नहीं जा सकता है”

Bhartrhari—Nitiśatakam

“Knowledge is such a treasure which cannot be stolen”

BLANK PAGE



भारतीय मानक

तकनीकी उत्पाद प्रलेखन — वर्णविन्यास

भाग 6 लैटिन वर्ण, संख्याओं और चिह्नों का कैड वर्णविन्यास

Indian Standard

**TECHNICAL PRODUCT DOCUMENTATION —
LETTERING**

PART 6 CAD LETTERING OF THE LATIN ALPHABET, NUMERALS AND MARKS

ICS 01.100.01; 35.240.10

© BIS 2001

BUREAU OF INDIAN STANDARDS

MANAK BHAVAN, 9 BAHADUR SHAH ZAFAR MARG

NEW DELHI 110002

NATIONAL FOREWORD

This Indian Standard (Part 6) which is identical with ISO 3098-5 : 1997 'Technical product documentation — Lettering — Part 5 : CAD lettering of the Latin alphabet, numerals and marks' issued by the International Organization for Standardization (ISO) was adopted by the Bureau of Indian Standards on the recommendation of Drawings Sectional Committee and approval of the Basic and Production Engineering Division Council.

This standard (Part 6) specifies the general requirements for computer-aided design and draughting (CADD) lettering to be used in technical product documentation (in particular on technical drawings). It includes basic conventions as well as rules for the application of CAD lettering using the techniques of numerically controlled lettering and draughting systems.

Other parts of this series are given as follows:

IS 9609 (Part 0) : 2001 ISO 3098-0 : 1997	Technical product documentation — Lettering : Part 0 General requirements
IS 9609 (Part 1) : 1983 ISO 3098-1 : 1974	Lettering on technical drawings : Part 1 English lettering (<i>first revision</i>)
IS 9609 (Part 2) : 1985 ISO 3098-2 : 1984	Lettering on technical drawings : Part 2 Greek characters
IS 9609 (Part 3) : 1991 ISO 3098-3 : 1987	Technical drawings — Lettering : Part 3 Diacritical and particular marks for the Latin alphabet
IS 9609 (Part 4) : 1991 ISO 3098-4 : 1984	Technical drawings — Lettering : Part 4 Cyrillic characters
IS 9609 (Part 5) : 1998	Lettering on technical drawings : Part 5 Amplified devnagri letters

The text of ISO Standard has been approved as suitable for publication as Indian Standard without deviations. In this adopted standard, certain terminology and conventions are not identical to those used in Indian Standards. Attention is especially drawn to the following:

- Wherever the words 'International Standard' appear referring to this standard, they should be read as 'Indian Standard'.
- Comma (,) has been used as a decimal marker while in Indian Standards, the current practice is to use a full point (.) as the decimal marker.

In this adopted standard, reference appears to certain International Standards for which Indian Standards also exist. The corresponding Indian Standards, which are to be substituted in their place, are listed below along with their degree of equivalence for the editions indicated:

<i>International Standard</i>	<i>Corresponding Indian Standard</i>	<i>Degree of Equivalence</i>
ISO 3098-0 : 1997 Technical product documentation — Lettering — Part 0 : General requirements	IS 9609 (Part 0) : 2001 Technical product documentation — Lettering: Part 0 General requirements	Identical
ISO/TR 10623 : 1991 Technical product documentation — Requirements for computer-aided design and draughting — Vocabulary	IS 15025 : 2001 Technical product documentation — Requirements for computer-aided design and draughting — Vocabulary	do

Indian Standard

TECHNICAL PRODUCT DOCUMENTATION — LETTERING

PART 6 CAD LETTERING OF THE LATIN ALPHABET, NUMERALS AND MARKS

1 Scope

This part of ISO 3098 specifies the general requirements for computer-aided design and draughting (CADD) lettering, in accordance with all other parts of this International Standard, to be used in technical product documentation (in particular on technical drawings).

It includes basic conventions as well as rules for the application of CAD lettering using the techniques of numerically controlled lettering and draughting systems.

2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this part of ISO 3098. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this part of ISO 3098 are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 3098-0:1997, *Technical product documentation — Lettering — Part 0: General requirements*.

ISO/TR 10623:1991, *Technical product documentation — Requirements for computer-aided design and draughting — Vocabulary*.

3 Definitions

For the purposes of this part of ISO 3098, the definitions given in ISO 3098-0 apply. Further definitions used in computer-aided design and draughting are given in ISO/TR 10623.

3.1 proportional spacing arrangement: Arrangement of graphic characters in the direction of writing spaced according to their natural width.

3.2 tabular spacing arrangement: Arrangement of graphic characters in the direction of writing within a constant-width space at predetermined positions, independent of the natural width of the characters.

4 General requirements

The general requirements for CAD lettering are specified in ISO 3098-0.

5 Requirements for CAD lettering

5.1 The types of CAD lettering are as follows:

- lettering type CB, vertical (V): see figure 1 (preferred application);
- lettering type CB, sloped (S);
- lettering type CA, vertical (V): see figure 2;
- lettering type CA, sloped (S).

The dimensions of these types of CAD lettering are specified in table 1.

NOTE — In contrast with type CB, the character width (in the direction of lettering) and the line width of lettering type CA may be reduced by a factor of $\sqrt{2}$ (to give approximately lettering type A in accordance with ISO 3098-0).

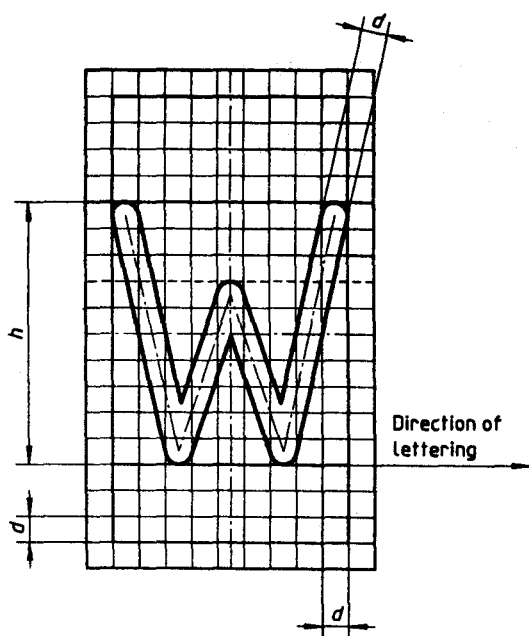


Figure 1

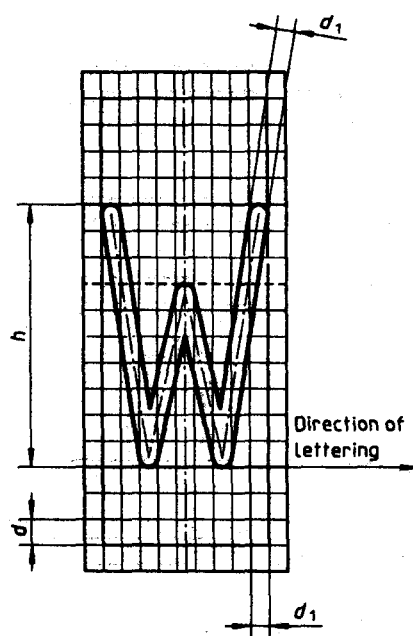


Figure 2

5.2 The types of spacing arrangements are as follows:

- tabular spacing (T): see figure 3;
- proportional spacing (P): see figure 4.

5.3 Each member of a graphic character set is established within a character box. The elements of the characters shall be positioned by means of a grid system. The following criteria for any member of a graphic character set shall be met:

- a) dimensions (see figures 5 and 6), shape and location;
- b) type of spacing arrangement (see figures 3 and 4);
- c) points of adjustment within the character box (see figure 7).

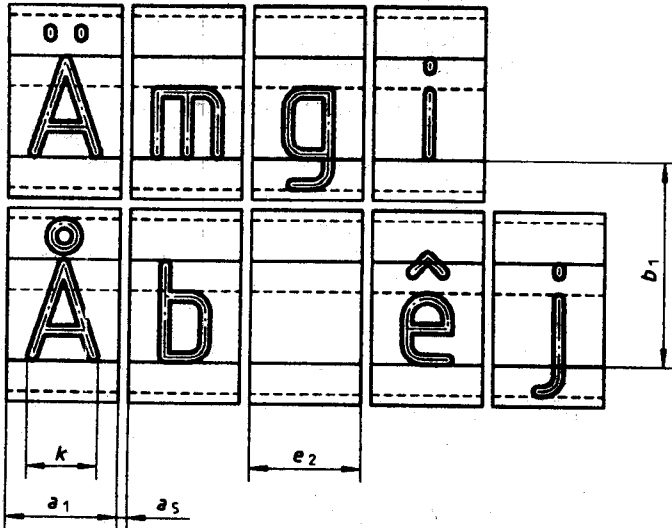


Figure 3

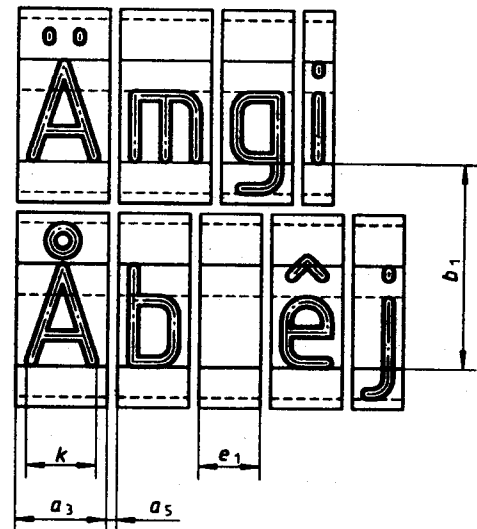


Figure 4

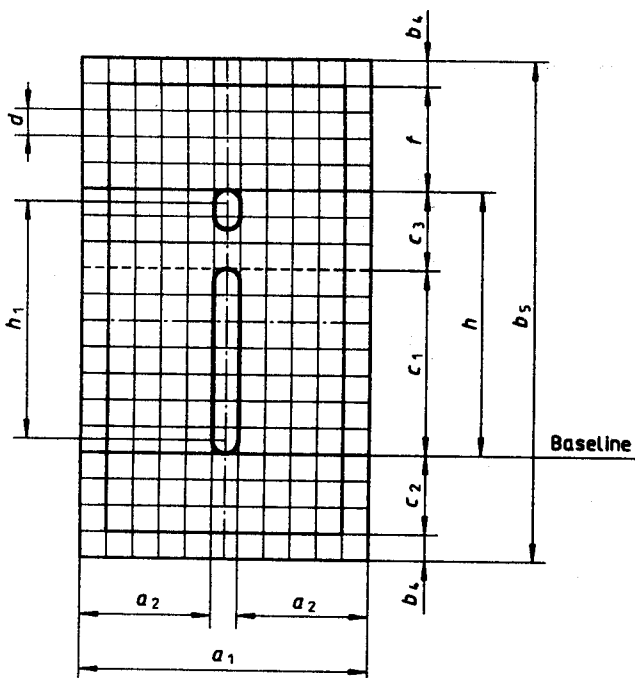


Figure 5

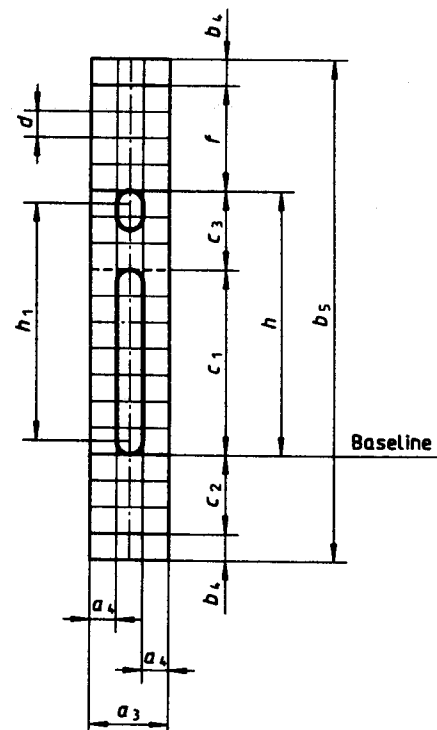


Figure 6

Table 1 — Dimensioning of lettering types CB and CA

Dimensions in millimetres

Characteristic		Multiple of h	Dimensions							
Lettering height	h	$(10/10)h$	1,8	2,5	3,5	5	7	10	14	20
Height of lower-case letters (x-height)	c_1	$(7/10)h$	1,26	1,75	2,5 ³⁾	3,5	5 ³⁾	7	10 ³⁾	14
Tail of lower-case letters	c_2	$(3/10)h$	0,54	0,75	1,05	1,5	2,1	3	4,2	6
Stem of lower-case letters	c_3									
Area of diacritical marks (upper-case letters)	f	$(4/10)h$	0,72	1	1,4	2	2,8	4	5,6	8
Width of any character (lettering type CB) ¹⁾	k	—	See clause 8 and tables 3 to 6							
Height of the central line	h_1	$(9/10)h$	1,62	2,25	3,15	4,5	6,3	9	12,6	18
Width of the character box (lettering type CB) ¹⁾	T a_1	$(11/10)h$	1,98	2,75	3,85	5,5	7,7	11	15,4	22
	P a_3	$[(2/10)h]+k$	See clause 8 and tables 3 to 6							
Spacing between baselines ²⁾	b_1	$(19/10)h$	3,42	4,75	6,65	9,5	13,3	19	26,6	38
Height of the character box	b_5	$(19/10)h$	0,18	0,25	0,35	0,5	0,7	1	1,4	2
Horizontal spacing between character box and character (lettering type CB) ¹⁾	T a_2	$(a_1 - k)/2$								
	P a_4	$(1/10)h$								
Vertical spacing between character box and character	b_4	$(1/10)h$								
Line width	lettering type CB d	$(1/10)h$	0,13 ³⁾	0,18 ³⁾	0,25	0,35	0,5	0,7 ³⁾	1	1,4 ³⁾
	type CA d_1	$(1/14)h$								
Spacing between words (lettering type CB) ¹⁾	P e_1	$(6/10)h$	1,08	1,5	2,1	3	4,2	6	8,4	12
	T e_2	$(11/10)h$	1,98	2,75	3,85	5,5	7,7	11	15,4	22
Spacing between character boxes	a_5	≥ 0	—							

1) In case of lettering type CA the values of the dimensions k , a_1 , a_3 , a_2 , a_4 , e_1 and e_2 are calculated by dividing the values of the lettering type CB by $\sqrt{2}$.

2) Lettering style: Upper-case and lower-case letters with diacritical marks; for spacings by b_2 and b_3 , see ISO 3098-0:1997, table 2.

3) Rounded values.

6 Alignment

Each character, each line of text and each area to be filled by several lines of text shall have one point of alignment.

The indication and location of points of alignment are given in table 2 and figures 7 and 8.

If numerical values are written in decimal form, the alignment shall be made with respect to the decimal sign (comma¹⁾). An example is shown in figure 9.

Table 2 — Indication of points of alignment

Direction		Horizontal		
		left	centre	right
Vertical	top	1	4	7
	centre	2	5	8
	bottom	3	6	9

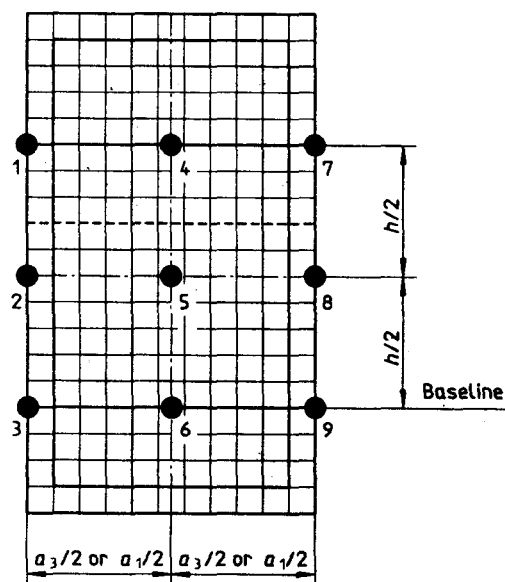


Figure 7

1) See IEC/ISO Directives, Part 3, 1997, 6.6.7.1.

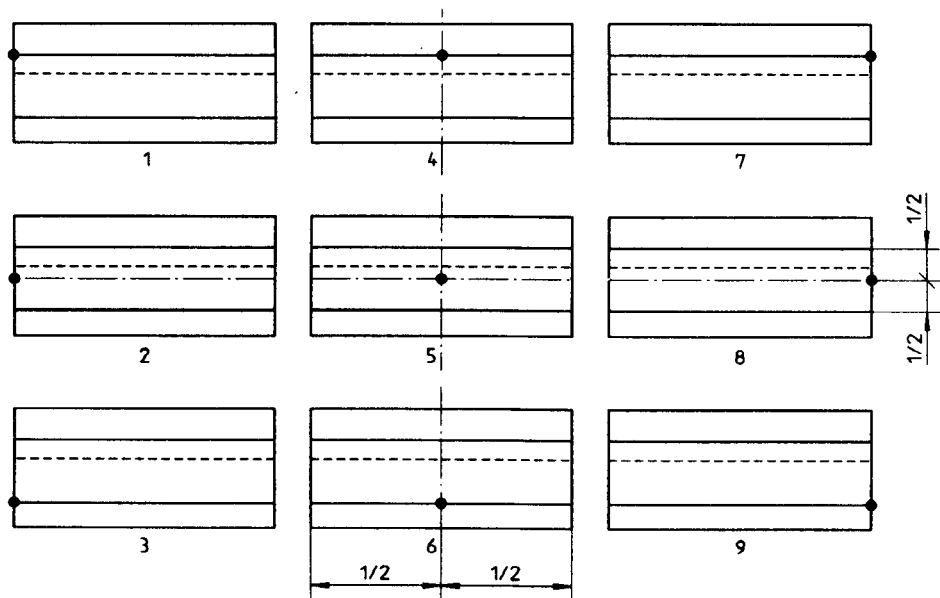


Figure 8

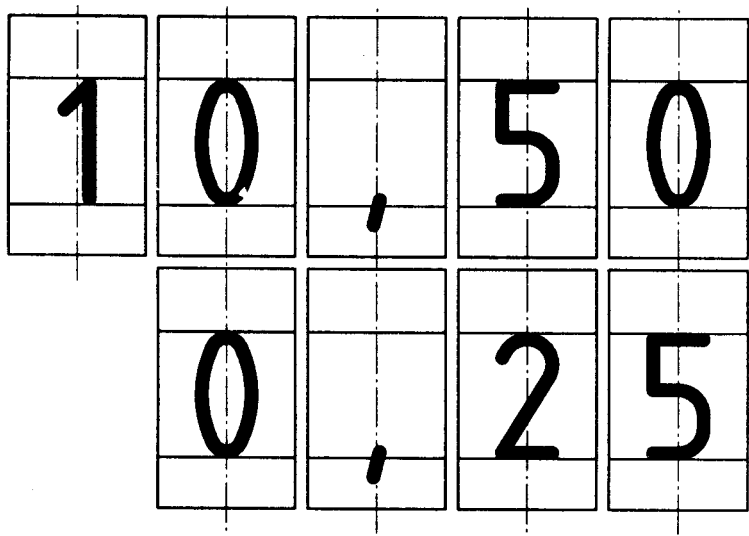


Figure 9

Several lines within an area filled by text may be arranged left-aligned, centred or right-aligned (see figure 10). An example of the location of the point of alignment for a complete area is shown in figure 11.

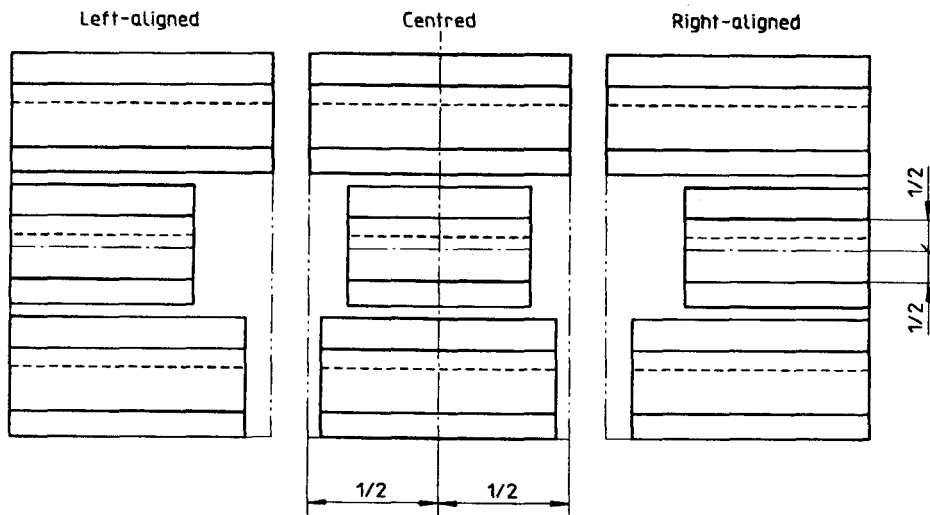


Figure 10

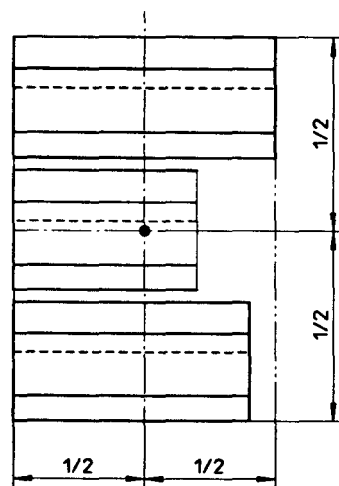


Figure 11

7 Designation

A graphic character set of a CAD lettering type shall be designated in accordance with ISO 3098-0.

EXAMPLE — A graphic character set of lettering type CB in proportional spacing arrangement, vertical, Latin alphabet, size 3,5 mm, shall be designated as follows:

Lettering ISO 3098 - CB PVL - 3,5

8 Form of characters

The characters of the lettering type CB shown in tables 3 to 6 are presented within an imaginary grid which is necessary for identification of positioning and proportions.

An example, shown in figure 12, presents a certain character within an imaginary grid.

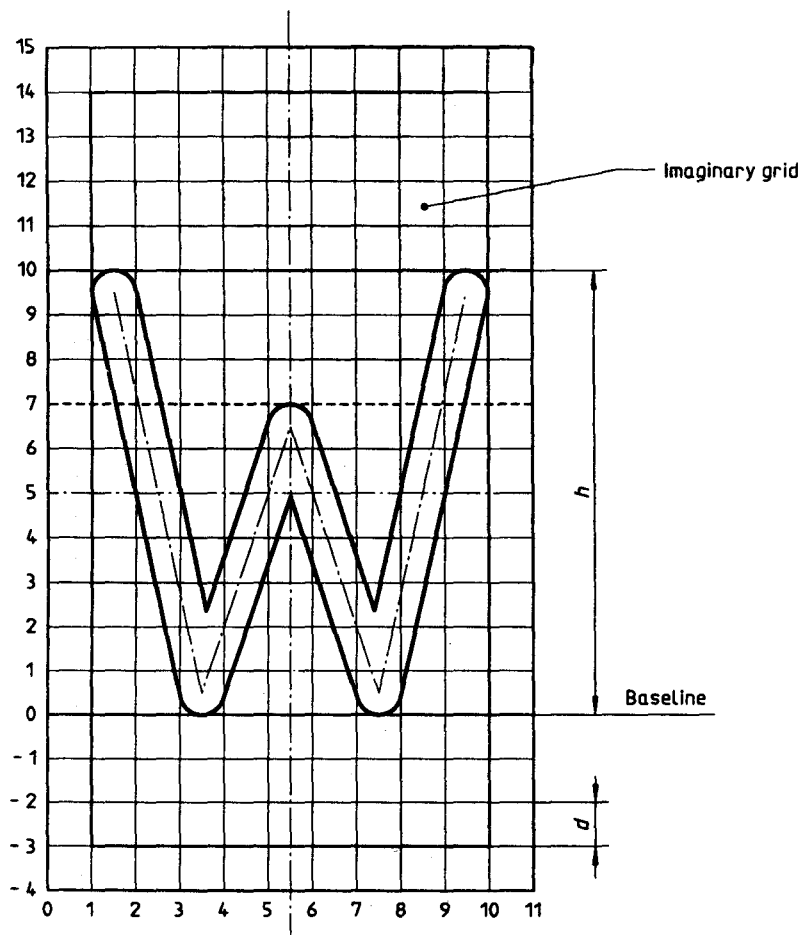


Figure 12

Indications of characters in tables 3 to 6 are interpreted as follows.

- a) Numerals in front of the oblique stroke indicate the kind of character.

001/... to 100/...: upper-case (capital) letters (table 3)
101/... to 200/...: lower-case (small) letters (table 4)
201/... to 300/...: numerals (table 5)
301/... to 400/...: marks (table 6)

- b) Numerals behind the oblique stroke indicate the diacritical marks of letters.

.../00: without diacritical mark
.../01: with grave accent
.../02: with acute accent
.../03: with circumflex
.../04: with tilde
.../05: with diaeresis
.../06: circle above
.../07: with double acute accent
.../08: with caron
.../09: with breve
.../10: with macron
.../11: with dot above
.../12: with cedilla
.../13: with oblique stroke
.../14: with stroke soft hyphen
.../15: with stroke
.../16: with eta
.../17: diphthong ligature with E
.../18: special letters

Table 3 — Upper-case letters and accents












				
001/00	001/01	001/02	001/03	001/04
				
	001/05	001/06		
				
	001/09	001/10		001/12
				
	001/17			

Table 3 — Upper-case letters and accents (continued)


 002/00				

Table 3 — Upper-case letters and accents (continued)







				
003/00		003/02	003/03	
				
				003/08
				
			003/11	003/12

Table 3 — Upper-case letters and accents (continued)




 004/00				
				 004/08
			 004/15	

Table 3 — Upper-case letters and accents (continued)










				
005/00	005/01	005/02	005/03	
				
	005/05			005/08
				
		005/10	005/11	005/12

Table 3 — Upper-case letters and accents (continued)


 006/00				

Table 3 — Upper-case letters and accents (continued)






 007/00			 007/03	
	 007/09		 007/11	 007/12

Table 3 — Upper-case letters and accents (*continued*)




				
008/00			008/03	
				
			008/15	

Table 3 — Upper-case letters and accents (continued)











				
009/00	009/01	009/02	009/03	009/04
				
	009/05			009/08
				
		009/10	009/11	009/12

Table 3 — Upper-case letters and accents (*continued*)



 010/00			 010/03	

Table 3 — Upper-case letters and accents (continued)



 011/00				
				 011/12

Table 3 — Upper-case letters and accents (*continued*)





 012/00		 012/02		
				 012/08
				 012/12

Table 3 — Upper-case letters and accents (continued)

013/00				

Table 3 — Upper-case letters and accents (*continued*)






				
014/00		014/02		014/04
				
				014/08
				
				014/12

Table 3 — Upper-case letters and accents (continued)










				
015/00	015/01	015/02	015/03	015/04
				
	015/05		015/07	
				
		015/10		
				
	015/13			

Table 3 — Upper-case letters and accents (continued)


 016/00				

Table 3 — Upper-case letters and accents (continued)


 017/00				

Table 3 — Upper-case letters and accents (*continued*)





 018/00		 018/02		
				 018/08
				 018/12

Table 3 — Upper-case letters and accents (continued)






				
019/00		019/02	019/03	
				
				019/08
				
				019/12

Table 3 — Upper-case letters and accents (*continued*)





 020/00				
				 020/08
				 020/12
		 020/14		

Table 3 — Upper-case letters and accents (continued)













				
021/00	021/01	021/02	021/03	021/04
				
	021/05	021/06	021/07	
				
	021/09	021/10	021/11	021/12

Table 3 — Upper-case letters and accents (*continued*)


				
022/00				

Table 3 — Upper-case letters and accents (continued)


 023/00				

Table 3 — Upper-case letters and accents *(continued)*


 024/00				

Table 3 — Upper-case letters and accents (continued)



				
025/00		025/02		

Table 3 — Upper-case letters and accents (*concluded*)

026/00		026/02		
				026/08

Table 4 — Lower-case letters and accents











				
101/00	101/01	101/02	101/03	101/04
				
	101/05	101/06		
				
	101/09	101/10		
				
	101/17			

Table 4 — Lower-case letters and accents (*continued*)


 102/00				

Table 4 — Lower-case letters and accents (continued)






				
103/00		103/02	103/03	
				
				103/08
				
				103/12

Table 4 — Lower-case letters and accents (*continued*)




 104/00				
				 104/08
			 104/15	

Table 4 — Lower-case letters and accents (continued)









				
105/00	105/01	105/02	105/03	
				
	105/05			105/08
				
			105/11	105/12

Table 4 — Lower-case letters and accents (continued)


				
106/00				

Table 4 — Lower-case letters and accents (continued)





				
107/00			107/03	
				
	107/09		107/11	

Table 4 — Lower-case letters and accents (*continued*)




 108/00			 108/03	
			 108/15	

Table 4 — Lower-case letters and accents (continued)









 109/00	 109/01	 109/02	 109/03	 109/04
	 109/05			
		 109/10		 109/12

Table 4 — Lower-case letters and accents (continued)


 110/00				

Table 4 — Lower-case letters and accents (continued)



 111/00				
				 111/12

Table 4 — Lower-case letters and accents (continued)






				
112/00		112/02		
				
				112/08
				
				112/12
				
	112/13			

Table 4 — Lower-case letters and accents (continued)


 113/00				

Table 4 — Lower-case letters and accents (*continued*)







 114/00		 114/02		 114/04
				 114/08
				 114/12
		 114/18		

Table 4 — Lower-case letters and accents (continued)












				
115/00	115/01	115/02	115/03	115/04
				
	115/05		115/07	
				
		115/10		
				
	115/13			115/16
				
	115/17			

Table 4 — Lower-case letters and accents (*continued*)



 116/00				
	 116/18			

Table 4 — Lower-case letters and accents (*continued*)


 117/00				

Table 4 — Lower-case letters and accents (continued)





				
118/00		118/02		
				
				118/08
				
				118/12

Table 4 — Lower-case letters and accents (continued)





				
119/00			119/03	
				
				119/08
				
				119/12

Table 4 — Lower-case letters and accents (continued)





 120/00				
				 120/08
				 120/12
		 120/14		

Table 4 — Lower-case letters and accents (continued)











				
121/00	121/01	121/02	121/03	121/04
				
	121/05		121/07	
				
		121/10	121/11	121/12

Table 4 — Lower-case letters and accents (continued)


 122/00				

Table 4 — Lower-case letters and accents (continued)


 123/00				

Table 4 — Lower-case letters and accents (*continued*)


 124/00				

Table 4 — Lower-case letters and accents (continued)




				
125/00		125/02		
				
			125/07	

Table 4 — Lower-case letters and accents (continued)


 126/00				

Table 4 — Lower-case letters and accents (concluded)













 127/00				

Table 5 — Numerals

 201	 202	 203
 204	 205	 206
 207	 208*)	 209*)
 210	 211	

*) The choice between these characters is left to the national bodies.

Table 6 — Marks





















			
301	302	303	304
			
305	306	307	308
			
309	310	311	312
			
313	314	315	316
			
317	318	319	320

Table 6 — Marks (continued)








































			
321	322	323	324
			
325	326	327	328
			
329	330	331	332
			
333	334	335	336
			
337	338	339	340

Table 6 — Marks (concluded)

			
341	342	343	344
			
345	346	347	348
			
349	350	351	352
			
353	354	355	356
			
357	358	359	360

Bureau of Indian Standards

BIS is a statutory institution established under the *Bureau of Indian Standards Act, 1986* to promote harmonious development of the activities of standardization, marking and quality certification of goods and attending to connected matters in the country.

Copyright

BIS has the copyright of all its publications. No part of these publications may be reproduced in any form without the prior permission in writing of BIS. This does not preclude the free use, in the course of implementing the standard, of necessary details, such as symbols and sizes, type or grade designations. Enquiries relating to copyright be addressed to the Director (Publications), BIS.

Review of Indian Standards

Amendments are issued to standards as the need arises on the basis of comments. Standards are also reviewed periodically; a standard along with amendments is reaffirmed when such review indicates that no changes are needed; if the review indicates that changes are needed, it is taken up for revision. Users of Indian Standards should ascertain that they are in possession of the latest amendments or edition by referring to the latest issue of 'BIS Catalogue' and 'Standards : Monthly Additions'.

This Indian Standard has been developed from Doc : No. BP 24 (0154).

Amendments Issued Since Publication

Amend No.	Date of Issue	Text Affected

BUREAU OF INDIAN STANDARDS

Headquarters:

Manak Bhavan, 9 Bahadur Shah Zafar Marg, New Delhi 110 002
Telephones : 323 01 31, 323 33 75, 323 94 02

Telegrams: Manaksanstha
(Common to all offices)

Regional Offices :

Telephone

Central : Manak Bhavan, 9 Bahadur Shah Zafar Marg
NEW DELHI 110 002

{ 323 76 17
323 38 41

Eastern : 1/14 C. I. T. Scheme VII M, V. I. P. Road, Kankurgachi
KOLKATA 700 054

{ 337 84 99, 337 85 61
337 86 26, 337 91 20

Northern : SCO 335-336, Sector 34-A, CHANDIGARH 160 022

{ 60 38 43
60 20 25

Southern : C. I. T. Campus, IV Cross Road, CHENNAI 600 113

{ 254 12 16, 254 14 42
254 25 19, 254 13 15

Western : Manakalaya, E9 MIDC, Marol, Andheri (East)
MUMBAI 400 093

{ 832 92 95, 832 78 58
832 78 91, 832 78 92

Branches : AHMADABAD. BANGALORE. BHOPAL. BHUBANESHWAR. COIMBATORE.
FARIDABAD. GHAZIABAD. GUWAHATI. HYDERABAD. JAIPUR. KANPUR.
LUCKNOW. NAGPUR. NALAGARH. PATNA. PUNE. RAJKOT. THIRUVANANTHAPURAM.