PLANT NO.	INDEX	DRAWING NUMBER	SHEET NO.	REV. NO.
990	M	AD-036973	001	07

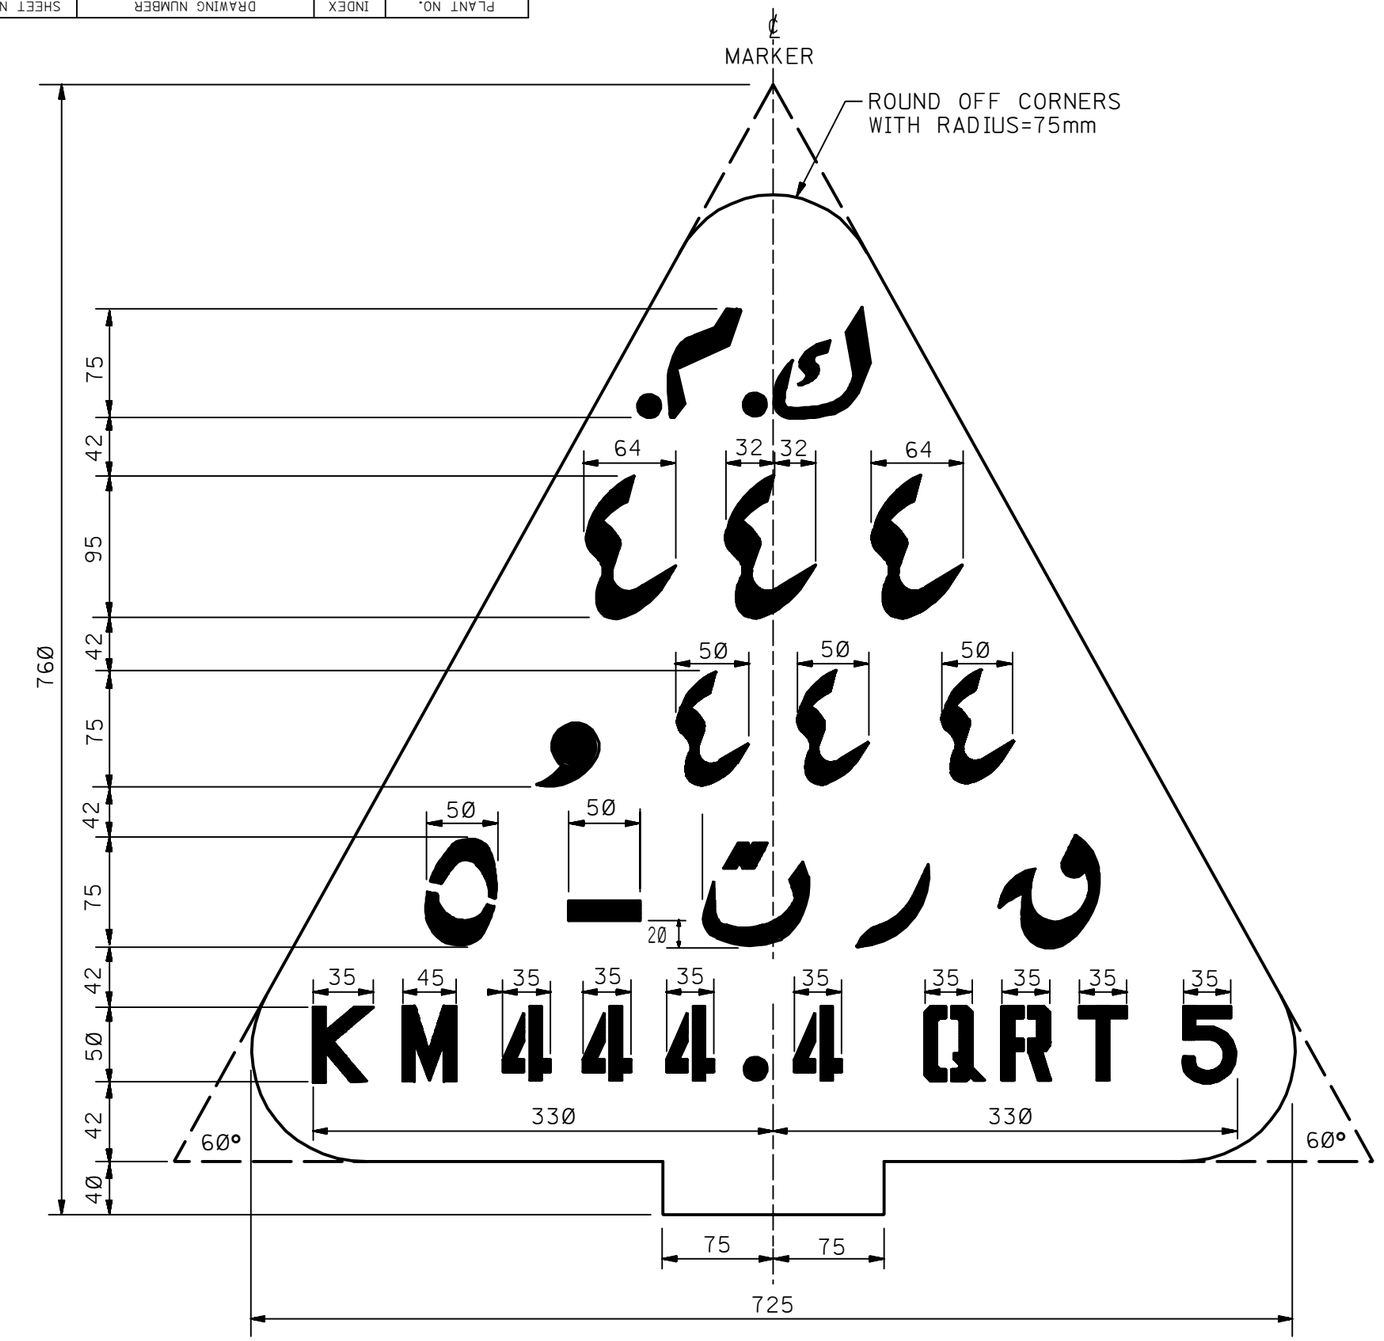

GENERAL NOTES

1. LETTERS & NUMERALS TO BE STAMPED OUT OR CUT OUT.
2. CARBON STEEL SHALL BE COATED IN ACCORDANCE WITH APCS-4 OR APCS-6. THE PROPONENT SHALL DETERMINE THE COLOR IF THERE IS NO COMPANY REQUIREMENT SPECIFIED. COATING IS NOT REQUIRED FOR GALVANIZED STEEL OR ALUMINUM MARKER PLATES.
3. THE VENDOR SHALL SUBMIT THE NAME AND MANUFACTURER OF PAINT IN HIS QUOTATION.
4. QRT-5 IS SHOWN AS AN EXAMPLE FOR PIPELINE DESIGNATION.
   SEE PURCHASE ORDER FOR SPECIFIC PIPELINE DESIGNATIONS AND FOR LISTING OF ACTUAL KILOMETER NUMBERS REQUIRED.
5. SEPARATE DRAWING WILL BE SUBMITTED GIVING ARABIC TRANSLATION FOR EACH PROJECT.
6. PLATE MATERIAL SHALL BE 3.5mm MILD STEEL (ASTM A-36) OR ALUMINUM (ASTM B-209, (ALLOY 6061, T6 TEMPER).
7. MARKERS SHALL BE PLACED IN ACCORDANCE WITH GENERAL INSTRUCTION 5.005.
8. ALL DIMENSIONS ARE IN MILLIMETERS UNLESS NOTED OTHERWISE.

REFERENCE DRAWINGS

STANDARD DETAILS OF P/L KILOMARKERS & CATHODIC PROTECTION TEST STATION FOR BURIED LINES	AB-036907

DRAWING RESPONSIBILITY:
ONSHORE STRUCTURES COMMITTEE

REV. NO.	DATE	BY	JO/EWO	DESCRIPTION	CHKD.	CERT.	APPD.
07	JAN01	EDSD AIR		DELETED LETTER SPACING			
06	NOV'98	EDSD WED		REVISED NOTES 2&3	ORIG. SIGNED	ORIG. SIGNED	ORIG. SIGNED
05	MAY'95	ESSD RLO		REVISED NOTE-6.	ORIG. SIGNED	ORIG. SIGNED	ORIG. SIGNED
04	10-08-86	RLO		REDRAWN & CONSOLIDATED SH. 1 & 2 INTO SH. 1 METRIC VERSION ONLY.AND ADDED MANDATORY DRAWING.	ORIG. SIGNED	ORIG. SIGNED	ORIG. SIGNED

SAUDI ARABIAN OIL COMPANY

DRAWN BY P.S.V. CHECKED BY _____ SCALE _____
DATE STARTED _____ DATE COMPLETED 04-13-64
OPRG. DEPT. _____ ENG. DEPT. 04-14-64
APPD. FOR CONSTR. _____

THIS DRAWING IS NOT TO BE USED FOR CONSTRUCTION OR FOR ORDERING MATERIAL UNTIL CERTIFIED AND DATED

CERTIFIED BY _____ DATE _____

MARKER PLATES FOR PIPELINE KILOMETER MARKER

STD. DWG. METRIC

PLANT NO.	INDEX	DRAWING NUMBER	SHEET NO.	REV. NO.
990	M	AD-036973	001	07

Copyright©Saudi Aramco 2009. All rights reserved.