


SAUDI ARABIAN OIL COMPANY

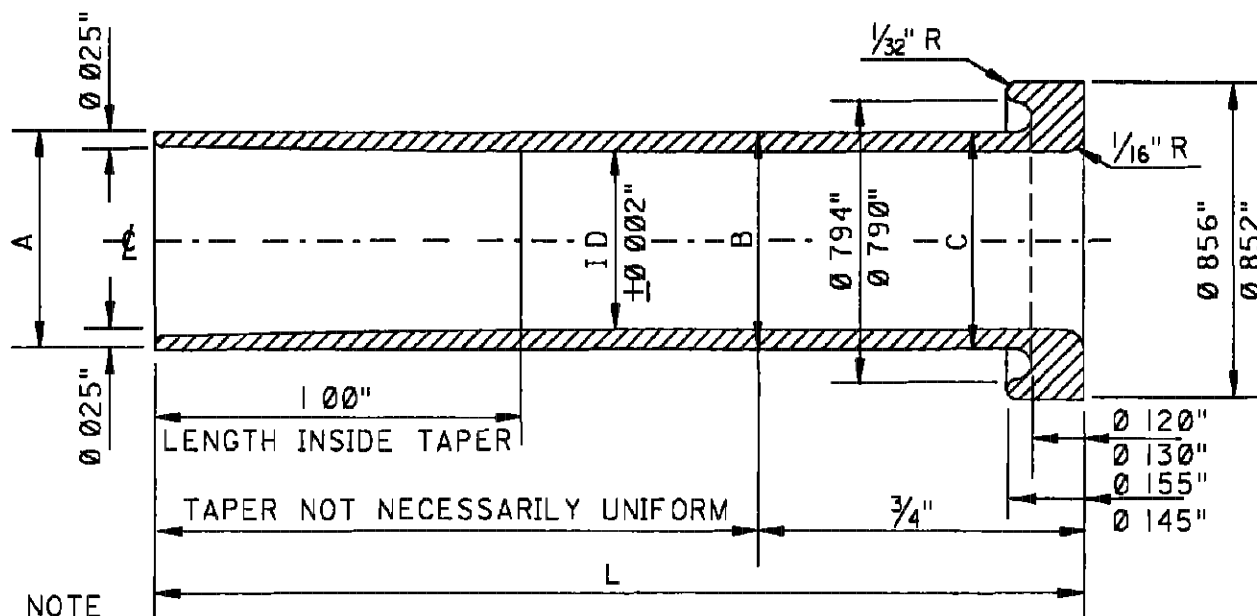

			AS MOULDED BEFORE SHRINKING				
MARK NO	L	I.D	A	B	C	TUBE GAGE	A M S NO
1	3 1/2"	0.496"	0.591" MAX 0.585" MIN	0.594" MAX 0.585" MIN	0.604" MAX 0.585" MIN	~ # 14	32-106-100
2	2 1/2"	0.531"	0.627" MAX 0.621" MIN	0.630" MAX 0.621" MIN	0.640" MAX 0.621" MIN	# 16	32-106-135
3	2 1/2"	0.526"	0.621" MAX 0.615" MIN	0.624" MAX 0.615" MIN	0.634" MAX 0.615" MIN	~ # 15-16	
4	2 1/2"	0.521"	0.617" MAX 0.611" MIN	0.620" MAX 0.611" MIN	0.630" MAX 0.611" MIN	BIMETAL 20 PLUS 20	
5	2 1/2"	0.516"	0.611" MAX 0.605" MIN	0.614" MAX 0.605" MIN	0.624" MAX 0.605" MIN	~ # 14-15	
6	2 1/2"	0.482"	0.577" MAX 0.571" MIN	0.580" MAX 0.571" MIN	0.590" MAX 0.571" MIN	~ # 13	
7	2 1/4"	0.479"	0.574" MAX 0.568" MIN	0.577" MAX 0.568" MIN	0.587" MAX 0.568" MIN	# 13	
8	1 1/2"	0.531"	0.627" MAX 0.621" MIN	0.630" MAX 0.621" MIN	0.640" MAX 0.621" MIN	# 16	32-106-170

MATERIAL BAKELITE

DWG RESPONSIBILITY
VESSEL STANDARDS COMMITTEE

DRAWING TITLE	PLANT NO	INDEX	DRAWING NO	SHT NO	REV NO
FERRULES FOR 3/4" OUTSIDE DIAMETER TUBES	990	E	AE-036250	001	03
STD DWG	J D		81		